


New Underground Storage Tank Compliance Dates

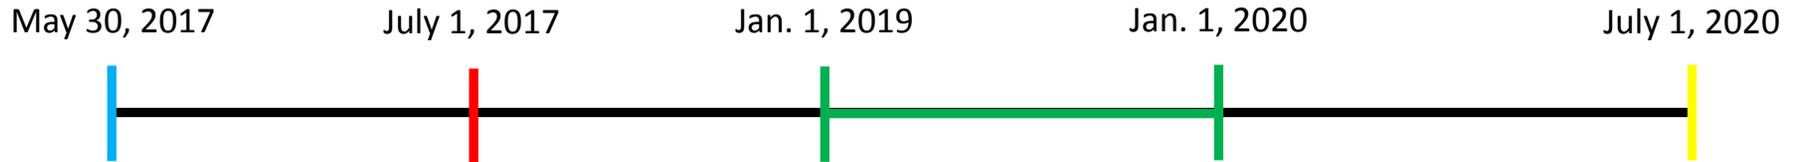

May 30, 2017	July 1, 2017	Conduct in 2019 (due by Jan. 1, 2020)		July 1, 2020
Cannot “field repair” a spill basin with epoxy, caulk or adhesive materials alone	New USTs must be double-walled/interstitial monitoring	1 st Spill Bucket Test required	New linings must be UL1856 ‘listed’	Vapor Monitoring sunsets as a release detection method (without chemical marker)
SIR reports must be returned to O/O by the 10 th of the following month	Replaced piping must be double-walled/interstitial monitoring	1 st Overfill Prevention Equipment Test		Groundwater Monitoring sunsets as a release detection method
Notify prior to change of product to biofuel	Dispenser replacement requires sump install	1 st Walkthrough inspection		
New Installation notice now 14 days (not 30 days)	Spill, Overfill and Containment Sump Test required at install	1 st operability test of release detection equipment		