

STATE OF MISSOURI
DEPARTMENT OF NATURAL RESOURCES
MISSOURI CLEAN WATER COMMISSION



GENERAL PERMIT for SEWER EXTENSION CONSTRUCTION

The Missouri Department of Natural Resources hereby issues a permit to:

Construction Permit ID: MOGC00612
Title of Project: Forest Lake Estates - Republic
Owner: Blake Cantrell
Address: 108 W MO-174
Republic, MO 65738

The project will also include general site work appropriate to the scope and purpose of the project and will include all the necessary appurtenances to make a complete and usable collection system. The construction of this project will be in the vicinity of the county below and discharge to Receiving Permit ID below:

County: Greene Receiving Permit ID: MO0022098

for the construction of (described construction project):

Forest Lake Estates, Republic -Construction of approximately 2,214 lf of 8-inch PVC SDR-35 gravity sewer lines with approximately 9 manholes to serve a 178 PE and a design average flow of 17,760 gpd.

Project is in the vicinity of West Forest Lane in the City of Republic, Greene County and discharges to an existing system to be treated at The City of Republic WWTF, MO-0022098. Garrett Brickner, City Engineer, with the City of Republic provided an acceptance letter dated November 7, 2019.

Construction of such proposed facilities shall be in accordance with the provisions of the Missouri Clean Water Law, Chapter 644, RSMo, and regulation promulgated thereunder, or this permit may be revoked by the Department of Natural Resources (Department). As the Department does not examine structural features of design or the efficiency of mechanical equipment, the issuance of this permit does not include approval of these features.

This permit applies only to the construction of water pollution control components; it does not apply to other environmentally regulated areas.

November 27, 2019
Issue Date



Edward B. Galbraith, Director
Division of Environmental Quality

April 19, 2020
Expiration Date



Chris Wieberg, Director
Water Protection Program

APPLICABILITY

1. This permit authorizes the construction of gravity sewer extensions, force mains, and lift stations. Storage basins, considered part of the collection system, are also included. Earthen basins are not included under this General Sewer Extension Construction permit.
2. A Sewer Extension Construction Permit may be required by the department due to compliance and enforcement actions.
3. This permit does not apply to:
 - A. Earthen storage basins;
 - B. Projects located within an Approved Sewer Program. These include the City of Blue Springs, City of Columbia, City of Kansas City, City of Jefferson City, City of Joplin, City of Lebanon, City of Springfield, City of St. Peters, Duckett Creek Sewer District, and Metropolitan St. Louis Sewer District;
 - C. Projects funded by the Department of Natural Resources;
 - D. Projects that substantially deviate from the Design Guides in 10 CSR 20-8; and
 - E. Exempt projects unless requested by the applicant or required by enforcement.

PREREQUISITES:

1. The General Sewer Extension Construction Permit application, appropriate fee, and a schedule for construction with the date on which construction will begin and anticipated completion date.
2. The engineering report, as required, plans and specifications each signed and sealed by a professional engineer registered in the State of Missouri. A Summary of Design is an acceptable substitute for the engineering report required by this permit prerequisite.
3. The Design Certification form signed and sealed by a professional engineer registered in the State of Missouri certifying the design of the system was done in accordance with 10 CSR 20-6 and 10 CSR 20-8.
4. A statement from the continuing authority was received accepting the wastewater for treatment.
5. A statement from the continuing authority was received accepting the responsibility for operation, maintenance, and modernization of these facilities

PERMIT CONDITIONS:

1. Contact the department's appropriate regional office 48 hours prior to starting construction. Contact information can be found at <http://dnr.mo.gov/regions/regions.htm>.
2. This permit authorizes the activities and scope of work detailed in the plans and specifications submitted with the request.
3. The construction must be in accordance with the design certification stating the plans and specifications comply with 10 CSR 20-6 and 10 CSR 20-8.

PERMIT CONDITIONS: (continued)

4. State and Federal Law does not permit bypassing of raw wastewater, therefore steps must be taken to ensure that raw wastewater does not discharge during construction. If a sanitary sewer overflow or bypass occurs, report the appropriate information to the department's regional office per 10 CSR 20-7.015(9)(E)2.
5. Protection of drinking water supplies shall be in accordance with 10 CSR 20-8.120(10). "There shall be no physical connections between a public or private potable water supply system and a sewer, or appurtenance thereto which would permit the passage of any wastewater or polluted water into the potable supply. No water pipe shall pass through or come in contact with any part of a sewer manhole."
 - A. Sewers in relation to water works structures shall meet the requirements of 10 CSR 23-3.010 with respect to minimum distances from public water supply wells or other water supply sources and structures.
 - B. Sewer mains shall be laid at least ten feet (10') horizontally from any existing or proposed water main. The distances shall be measured edge-to-edge. In cases where it is not practical to maintain a ten foot (10') separation, the department may allow a deviation on a case-by-case basis, if supported by data from the design engineer. Such a deviation may allow installation of the sewer closer to a water main, provided that the water main is in a separate trench or on an undisturbed earth shelf located on either side of the sewer and at an elevation so the bottom of the water main is at least 18 inches above the top of the sewer. If it is impossible to obtain proper horizontal and vertical separation as described above for sewers, the sewer must be constructed of slip-on or mechanical joint pipe or continuously encased and be pressure tested to 150 pounds per square inch to assure water tightness.
 - C. Manholes shall be located with the top access at or above grade level.
 - D. Manholes should be located at least ten feet (10') horizontally from any existing or proposed water main.
 - E. Sewers crossing water mains shall be laid to provide a minimum vertical distance of 18 inches between the outside of the water main and the outside of the sewer. This shall be the case where the water main is either above or below the sewer. The crossing shall be arranged so that the sewer joints will be equidistant and as far as possible from the water main joints. Where a water main crosses under a sewer, adequate structural support shall be provided for the sewer to maintain line and grade. When it is impossible to obtain proper vertical separation as stipulated above, one of the following methods must be specified:
 - 1) The sewer shall be designed and constructed equal to the water pipe and shall be pressure tested to assure water tightness prior to backfilling; or
 - 2) Either the water main or sewer line may be continuously encased or enclosed in a watertight carrier pipe which extends ten feet (10') on both sides of the crossing, measured perpendicular to the water main. The carrier pipe shall be of materials approved by the department for use in water main construction.

PERMIT CONDITIONS: (continued)

6. In addition to the requirements for a construction permit, 10 CSR 20-6.200 requires land disturbance activities of one acre or more to obtain a Missouri State Operating Permit to discharge stormwater. The permit requires Best Management Practices sufficient to control runoff and sedimentation to protect waters of the state. Land disturbance permits will only be obtained by means of the department's ePermitting system available online at www.dnr.mo.gov/env/wpp/epermit/help.htm.

See www.dnr.mo.gov/env/wpp/stormwater/sw-land-disturb-permits.htm for more information.

7. A United States (U.S.) Army Corps of Engineers (COE) permit (404) and a Water Quality Certification (401) issued by the department or permit waiver may be required for the activities described in this permit. This permit is not valid until these requirements are satisfied. If construction activity will disturb any land below the ordinary high water mark of Jurisdictional Waters of the U.S. then a 404/401 will be required. Since the COE makes determinations on what is jurisdictional, you must contact the COE to determine permitting requirements. You may call the department's Water Protection Program at (573) 751-1300 for more information.

See www.dnr.mo.gov/env/wpp/401/ for more information.

8. If this project eliminates a wastewater treatment facility, then a full closure plan shall be submitted to the department's appropriate regional office for review and approval of any permitted wastewater treatment system being replaced. In accordance with 10 CSR 20-6.010(12), the closure plan must meet the requirements outlined in Standard Conditions Part III, Section I, of the Missouri State Operating Permit. Closure shall not commence until the submitted closure plan is approved by the department. Form J – Request for Termination of a State Operating Permit, shall be submitted to the department's appropriate Regional Office for termination of any existing Missouri State Operating Permit, once closure is completed in accordance with the approved closure plan.
9. Submit a Statement of Work Completed Form to the department following completion of construction. Submit an electronic copy of the as built plans if the project was not constructed in accordance with previously submitted plans and specifications.



MISSOURI DEPARTMENT OF NATURAL RESOURCES
 WATER PROTECTION PROGRAM
**APPLICATION FOR CONSTRUCTION PERMIT –
 SEWER EXTENSION**

RECEIVED

NOV 18 2019

Water Protection Program

FOR DEPARTMENT USE ONLY	
APP NO. AR 33988	CP NO. MOG000612
FEE RECEIVED \$300.00	CHECK NO. 2104
DATE RECEIVED 11-18-19	

NOTE ► PLEASE READ THE ACCOMPANYING INSTRUCTIONS BEFORE COMPLETING THIS FORM

1.0 APPLICATION INFORMATION (Note – If any of the questions in this section are answered NO, this application may be considered incomplete and returned.)

- 1.1 Is this a Federal/State funded project? YES N/A Funding Agency: _____ Project #: _____
- 1.2 Has the Department of Natural Resources approved the proposed project's engineering report*?
 YES Date of Approval: _____ NO N/A
- 1.3 Is a copy of the appropriate plans* and specifications* included with this application? YES NO
- 1.4 Is a summary of design* included with this application? YES NO Specifications Review Number 53527-04
- 1.5 Is the appropriate fee or JetPay confirmation included with this application? YES NO
 See Section 7.0

* Must be affixed with a Missouri registered professional engineer's seal, signature and date.

2.0 PROJECT INFORMATION

2.1 NAME OF PROJECT

Sewer Main Extension, Forest Lake Estates, Republic

ADDRESS	CITY	STATE	ZIP CODE	COUNTY
W Forest Lane	Republic	MO	65738	GREENE

2.2 Legal Description: ¼ SW ¼ SE ¼ Sec. 19 T 28N R 23W

2.3 Project Components (check all that apply):

- Gravity sewers Pumping stations Force mains Alternative sewer system Other (Describe below.)

2.4 PROJECT DESCRIPTION

Approx. 2214 lin.ft. 8" dia. PVC gravity sanitary sewer line with 9 manholes and all fittings, service connections, appurtenances, etc for a complete project

2.5 DESIGN INFORMATION

- A. Population or number of lots to be served by this extension: 48 Lots
- B. Estimated flow to be contributed by this extension: Design Average Flow: 17760 gpd Design Peak Hourly Flow: 3004 gph
- C. Industrial Wastes: Type: N/A Flow: gpd
- D. Receiving Sewer: Size: 8 inches Capacity: 383.49 gpm

3.0 PROJECT OWNER

NAME	TELEPHONE NUMBER WITH AREA CODE	EMAIL ADDRESS
Blake Cantrell	(417) 840-1661	blakecansell@gmail.com


ADDRESS	CITY	STATE	ZIP CODE
108 W MO-174	Republic	MO	65738

4.0 CONTINUING AUTHORITY: A continuing authority is a company, business, entity or person(s) that will be operating the facility or ensuring compliance with the permit requirements. A continuing authority is not, however, an entity or individual that is contractually hired by the permittee to sample or operate and maintain the system for a defined time period, such as a certified operator or analytical laboratory. To access the regulatory requirement regarding continuing authority, 10 CSR 20-6.010(2), please visit <https://s1.sos.mo.gov/cmsimages/adrules/csr/current/10csr/10c20-6.pdf>. A continuing authority's name must be listed exactly as it appears on the Missouri Secretary of State's (SoS's) webpage: <https://bsd.sos.mo.gov/BusinessEntity/BESearch.aspx?SearchType=0>, unless the continuing authority is an individual(s), government, or otherwise not required to register with the SoS.

NAME	TELEPHONE NUMBER WITH AREA CODE	EMAIL ADDRESS
City of Republic	417-732-3401	anelson@republicmo.com

ADDRESS	CITY	STATE	ZIP CODE
221 North Main Avenue	Republic	MO	65738

4.1 A letter from the continuing authority or the Continuing Authority and Receiving Wastewater Treatment Facility Acceptance form, if different than the owner, is included with this application. YES NO N/A

5.0 ENGINEER			
ENGINEER NAME / COMPANY NAME Ralph D. Tate, P.E., Tate Engineering Consultants		TELEPHONE NUMBER WITH AREA CODE (417) 862-5684	EMAIL ADDRESS tateengr@mchsi.com
ADDRESS 4054 W. Page Place	CITY Springfield	STATE MO	ZIP CODE 65802
6.0 RECEIVING WASTEWATER TREATMENT FACILITY			
NAME City of Republic Wastewater Treatment Plant		TELEPHONE NUMBER WITH AREA CODE 417-732-3401	EMAIL ADDRESS anelson@republicmo.com
MISSOURI STATE OPERATING PERMIT # MO-0022098		REMAINING CAPACITY (GPD) 1,600,000	
6.1 Has the receiving treatment facility agreed to accept the additional wastewater flow? <input checked="" type="checkbox"/> YES <input type="checkbox"/> NO			
6.2 A letter from the receiving wastewater treatment facility, if different than the continuing authority, is included with this application. <input checked="" type="checkbox"/> YES <input type="checkbox"/> NO <input type="checkbox"/> N/A			
7.0 Application Fee			
<input checked="" type="checkbox"/> Check Number 2104		<input type="checkbox"/> JetPay Confirmation Number	
8.0 PROJECT OWNER: I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.			
PROJECT OWNER SIGNATURE 			
PRINTED NAME Blake Cantrell		DATE 11-12-19	
TITLE OR COPORATE POSITION Owner		TELEPHONE NUMBER WITH AREA CODE (417) 840-1661	EMAIL ADDRESS blakecansell@gmail.com
Mail completed copy to: MISSOURI DEPARTMENT OF NATURAL RESOURCES WATER PROTECTION PROGRAM P.O. BOX 176 JEFFERSON CITY, MO 65102-0176			

**INSTRUCTIONS FOR COMPLETING
APPLICATION FOR CONSTRUCTION PERMIT – SEWER EXTENSION**

All blanks must be filled in when the application is submitted to the Missouri Department of Natural Resources. This includes the **required signature**.

In accordance with Missouri State law RSMo 644.051.3.(2), sewer extension projects installing up to a total of 1,000 linear feet of gravity sewer or force main with less than two pump stations are exempt from obtaining a construction permit. Since these projects are exempt, a construction permit will not be issued for this activity and completion of this form is not required.

Note: Use the form *Application for Construction Permit – Wastewater Treatment Facility*, MO 780-2189, if any wastewater treatment component(s) are to be constructed.

A land disturbance permit is required if construction will result in the disturbance of one or more acres of land. A land disturbance permit is available through the department's ePermitting system at dnr.mo.gov/env/wpp/epermit/help.htm. A permit fee in accordance with 10 CSR 20-6.011(2)(E) is required.

After receiving a complete application, the department enters the application information into the Missouri Clean Water Information System. You may search for the status of a construction permit online at https://apps5.mo.gov/mocwis_public/applicationInprocessSearch.do.

- 1.1 Check appropriate box. If the project is funded with federal or state monies, supply the funding agency name and project number.
 - 1.2 Check appropriate box and provide the date of department approval.
The department has developed a fact sheet to aid in the development of an approvable engineering report. This document is available online at dnr.mo.gov/pubs/pub2415.htm. Engineering report exemptions are listed in 10 CSR 20-6.010(4)(B). Per 10 CSR 20-8.110(2), engineering reports must be approved by the department prior to the submittal of plans and specifications and a construction permit application. The department has developed a fact sheet to aid in the development of an approvable engineering report, [Engineering Report Guidance for Collection Systems](#), Fact Sheet--PUB2415.
 - 1.3 Check appropriate box. Provide a copy of the appropriate plans and specifications for department review when applying for a construction permit per 10 CSR 20-8.110 and 10 CSR 20-6.010. A Missouri registered professional engineering seal, signature and date is required on each sheet of the plans and the cover of the technical specifications. An electronic copy of the construction permit application and the information listed below in Portable Document Format (PDF) searchable format or department approved equivalent per 10 CSR 20-6.010(5)(G), along with one paper copy for projects not seeking department funding or two paper copies for projects seeking department funding under 10 CSR 20-4.
 - 1.4 Check appropriate box. A summary of design shall accompany the plans and specifications when applying for a construction permit per 10 CSR 20-8.110. The department has developed a fact sheet to aid in the development of an acceptable summary of design, [Summary of Design Guidance](#), Fact Sheet--PUB2417.
 - 1.5 Check the appropriate box. Include fee with application per 10 CSR 20-6.011(2) and Wastewater Treatment Facility Permit Fees -- PUB2564.
- Note: The department returns incomplete construction permit applications and related engineering documents and the application forfeits the fees. See 10 CSR 20-6.011(5)(A). The applicant forfeits the fees when the applicant withdraws construction applications. See 10 CSR 20-6.011(5)(B).2.1. Provide the project name and location by street name or address.
- 2.2 Provide the project legal description. The department's mapping system is available online at dnr.mo.gov/gis/.
 - 2.3 Check all of the applicable boxes.
The department considers anything other than a gravity sewer system to be an alternative sewer system. Examples of these systems are grinder pump pressure sewers, septic tank effluent pump, or STEP, sewers, septic tank effluent gravity, or STEG, sewers or small diameter gravity sewers.
 - 2.4 Briefly describe the project by providing the following information:
 - A. Total number of manholes.
 - B. Size of sewers and the total linear feet of each size.
 - C. Number of lift stations and design average flow and peak hourly flow capacities of each lift station.
 - D. Size and length of force mains.
 - E. Alternative sewer size and length, plus the number of components (e.g. septic tanks, grinder pumps, etc.)
 - 2.5 Provide the project design information and when required in the units specified.
 - A. Provide the population or number of lots to be served by the proposed sewer extension.

- B. Provide the estimated design flow information in accordance with 10 CSR 20-8.110(4)(C)4.A.
Design average flow – The design average flow is the average of the daily volumes to be received for a continuous 12 month period expressed as a volume per unit time. However, the design average flow for facilities having critical seasonal high hydraulic loading periods (e.g., recreational areas, campuses and industrial facilities) shall be based on the daily average flow during the seasonal period.
Design peak hourly flow – The design peak hourly flow is the largest volume of flow to be received during a one hour period expressed as a volume per unit time.
- C. Provide the type and flow in gallons per day of industrial wastes received by the propose sewer extension.
D. Provide the receiving sewer size in inches and capacity in gallons per minute.

- 3.0 Complete Project Owner information. Include the legal name and address.
- 4.0 Continuing Authority – A continuing authority is a company, business, entity or person(s) that will be operating the facility or ensuring compliance with the permit requirements. A continuing authority is not, however, an entity or individual that is contractually hired by the permittee to sample or operate and maintain the system for a defined time period, such as a certified operator or analytical laboratory. To access the regulatory requirement regarding continuing authority, 10 CSR 20-6.010(2), please visit <http://s1.sos.mo.gov/cmsimages/adrules/csr/current/10csr/10c20-6.pdf>. A continuing authority's name must be listed exactly as it appears on the Missouri Secretary of State's (SoS's) webpage: <https://bsd.sos.mo.gov/BusinessEntity/BEsearch.aspx?SearchType=0>, unless the continuing authority is an individual(s), government, or otherwise not required to register with the SoS. If same as the Project Owner, write "Same as above".
- 4.1 Check appropriate box. Include a letter signed by the continuing authority (if not same as the project owner) stating they will "accept, operate and maintain" the sewer extension. The continuing authority may also complete the Continuing Authority and Receiving Wastewater Treatment Facility Acceptance form in lieu of a letter. If the continuing authority will not accept and agree to operate and maintain the sewer extension, this application will be considered incomplete.
- 5.0 Complete Engineer contact information.
- 6.0 Complete Receiving Wastewater Treatment Facility information. Include the Missouri State Operating Permit number and the available remaining capacity in gallons per day, or gpd.
- 6.1 Check appropriate box. The receiving wastewater treatment facility must be notified and agree to the proposed sewer extension and additional flow, prior to submitting a construction permit to the department. If the receiving wastewater treatment facility will not accept the wastewater, this application will be considered incomplete.
- 6.2 Check appropriate box. Include a letter from the receiving wastewater treatment facility (if not same as the continuing authority) acknowledging and accepting the additional flow from the proposed sewer extension.
- 7.0 Check the appropriate box and include check or confirmation number. Applicants can pay fees online by credit card or eCheck through a system called JetPay.
- Per Section 37.001, RSMo, a transaction fee will be included. The transaction fee is paid to the third party vendor JetPay, not the Department of Natural Resources.
 - Be sure to select the correct fee type and corresponding URL to ensure your payment is applied appropriately. If you are unsure what type of fee to pay, please contact the Water Protection Program's Budget, Fees, and Grants Management Unit by phone at 573-522-1485 for assistance.
 - Upon successful completion of your payment, JetPay provides a payment confirmation. Submit this form with a copy of the payment confirmation if requesting a new permit or a permit modification. For permit renewals of active permits, the Department will invoice fees annually in a separate request.
 - If you are unable to make your payment online, but want to pay with credit card, you may email your name, phone number, and invoice number, if applicable, to WPPFEES@dnr.mo.gov. The Budget, Fees, and Grants Management Unit will contact you to assist with the credit card payment. **Please do not include your credit card information in the email.**
 - Applicants can find fee rates in 10 CSR 20-6.011 and *Wastewater Treatment Facility Permit Fees--PUB2564* (<https://dnr.mo.gov/pubs/pub2564.htm>).

WP 04 Construction Permits: <https://magic.collectorsolutions.com/magic-ui/payments/mo-natural-resources/592/>

8.0 The owner of the construction project must sign the application.

Mail the completed form and applicable fee to the department.

If there are any questions concerning this form, please contact the Department of Natural Resources, Water Protection Program at 800-361-4827 or 573-751-1300 or visit dnr.mo.gov/env/wpp/permits/ww-construction-permitting.htm.

SEWER EXTENSION DESIGN CERTIFICATION

Answer all questions yes, no, or N/A. Answer N/A only if the question is clearly not applicable to the design of the proposed sewer extension OR if a deviation was previously allowed by the Department in the approval of Standard specifications or Standard Detail Sheets.

9.0 SEWER EXTENSION CHECKLIST					
	REGULATION		YES	NO	N/A
1	8.110(9)(B)	Are detailed plans showing tributary area, boundaries, pertinent elevations, topography, existing and proposed facilities provided?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
2	8.110(3)(A)	Is the design flow based on actual flow data for an existing system?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
3	8.110(3)(B)	Are average design flows, peak hourly flows, and I&I contributions for new systems calculated.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4	8.120(2)	Does the sewer exclude water from roofs, streets, groundwater from foundation drains, and combined wastewater?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
5	8.120(3)(C)	Is ASTM C969-17 leakage test specified to ensure water tight joint seals and appropriate exfiltration and infiltration rates?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
6	8.120(4)(A)	Are manholes located at all changes in grade, size or alignment, and all intersections?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
7	8.120(3)(A)1	Are all sewer pipes constructed with a slope to obtain mean velocities of not less than 2 feet per second?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
8	8.120(3)(A)2	Is the pipe covered with at least 36" of soil or sufficiently insulated to prevent freezing?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
9	8.120(3)(A)	Is the pipe installation, embedment, and backfill designed to prevent damage to the pipe and its joints?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
10	8.120(3)(B)	Is deflection testing specified to ensure no pipe exceeds a deflection of 5% of the inside diameter?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
11	8.120(4)(C)	Are manholes at least 42 inches in diameter with a clear opening of 22 inches on sewer line larger than 8"?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
12	8.120(4)(C)	Where cleanouts are used at the end of a lateral instead of a manhole, are they a minimum diameter of 8 inches or larger and equal to the diameter for pipes < 8"?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
13	8.120(4)(E)	Are the manholes specified to be watertight, constructed, installed in accordance with the manufacturer's recommendations and procedures?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
14	8.120(4)(F)	Do the specifications include a requirement for inspection and testing for manholes?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
15	8.120(5)(B)	Are sewers and manholes located at least 50 feet horizontally from any existing or proposed water supply well, sources, structures?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
16	8.120(5)(A)	Is the sewer free from physical connections to a potable water supply system with no water pipes coming in contact with a sewer manhole?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

10.0 PRESSURE SEWERS, GRINDER PUMP, STEP AND STEG SEWER CHECKLIST					
	REGULATION		YES	NO	N/A
17	8.125(5)(A)1.	Does the cleaning velocity of ≥ 2 ft/s happen at least once per day?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
18	8.125(5)(A)2.	Is the diameter of the pressure sewer main pipe at least 1.5"?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
19	8.125(5)B	Are appurtenances compatible with the piping system?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
20	8.125(5)(C)	Do service line pipes have a minimum diameter of 1.25 in.?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
21	8.125(5)(D)1. A	Do simplex grinder pump stations service only a single equivalent dwelling unit (EDU)? i.e. 1 residence – 1 grinder pump station.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
22	8.125(5)(D)1. B	Are multiple unit pump stations owned, operated, maintained by an approved continuing authority?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
23	8.125(5)(D)3	Is there at least 70 gallons of storage in the grinder pump unit?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
24	8.125(5)(D)4	Do grinder pump stations have shutoff valves, check valves, and anti-siphon valves (where siphoning could occur) that are accessible from the ground surface?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
25	8.125(5)(D)7 8.130(3)(B)2	Are units serviceable and replaceable under wet conditions without electrical hazard and electrical equipment suitable for hazardous locations (National Electrical Code, Class I, Group D, Division 1 location)?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
26	8.125(5)(D)8 8.125(6)(F)6	Are provisions in place to avoid interruption of service due to mechanical or power failure by providing standby power, storage capacity or interconnection with another disposal system?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
27	8.125(6)(D) 8.180(2)	Does each EDU have at least one septic tank with a minimum of 1,000 gallon capacity with 20% of tank volume dedicated to freeboard and ventilation?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
28	8.125(6)(F)	Are pump vaults designed with duplex pumps for STEP sewer systems with design flow of 1,500 gallons per day or greater?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
29	8.125(7)(A) 8.125(7)(C)	Is the minimum STEG sewerservice line at least 4" in diameter?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
11.0 PUMP STATION CHECKLIST					
	REGULATION		YES	NO	N/A
30	8.130(2)(A) 8.140(2)(B)	Is the pump station designed to withstand the 100-year flood?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
31	8.130(3)(A)	Is the dry well completely separate from the wet well and is a suitable and safe means of access provided to each?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
32	8.130(3)(B)	If the design flow is 1,500 gpd or more, are at least 2 pumps or pneumatic ejectors provided?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
33	8.130(3)(D)	Are valves located outside wet well unless integral to a pump or its housing?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
34	8.130(3)(F) 8.140(8)(J)	Do wet and dry wells have separate ventilation systems?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
35	8.130(3)(G)	Does all potable water brought to the pump station comply with 8.140 (7) D?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
36	8.130(6)	Is an alarm system provided with uninterrupted power?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
37	8.130(7)(A)	Is there 2 hours retention of the peak hourly flow for a design flow > 100,000 gpd or 4 hrs retention of the peak hourly flow for a design flow < 100,000 gpd?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
38	8.130(7)(B)	Is there an independent utility substation provided for emergency power that is capable of starting and operating the pump station at its rated capacity?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
39	8.130(8)(A)	Is the force main velocity of ≥ 2 ft/s maintained?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
40	8.130	Are there complete operation instructions for the pumping stations provided that include emergency procedures, maintenance schedules, special tools and spare parts that may be necessary?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

12.0 SUCTION LIFT PUMP AND SUBMERSIBLE PUMP STATION CHECKLIST

	REGULATION		YES	NO	N/A
41	8.130(4)	Are the suction lift pumps of the self priming or vacuum priming type?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
42	8.130(4)(A)	Is the combined total of dynamic suction lift at the "pump off" elevation and required net positive suction head at design operating conditions less than or equal to twenty-two feet (22')?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
43	8.130(4)(B)	Are there dual vacuum pumps capable of removing air from the suction lift pump?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
44	8.130(5)(A)	Are submersible pumps readily removable and replaceable without personel entering, or disconnecting any pipe in the wet well?	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>


13.0 CERTIFICATION STATEMENT

I hereby certify that the design plans and specifications for this project, to the best of my knowledge, conform to the requirements listed above. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment.

I hereby certify that this plan, specification, and/or report was prepared by me or under my direct supervision and that I am a duly Licensed Professional Engineer under the laws of the state of Missouri.

For any question answered "NO" provide explanation. Provide any useful comments on design for review engineer:

Missouri Professional Engineer's Seal:

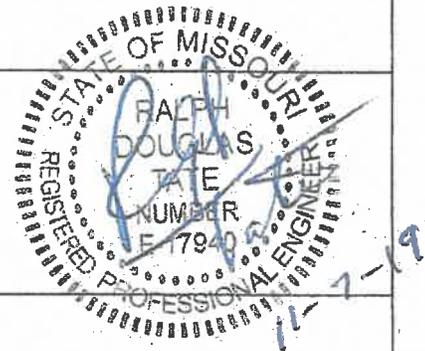

Name: Ralph D. Tate, P.E., Tate Engineering Consultants

Street Address: 4054 W. Page Place

City: Springfield

State: MO


ZIP Code: 65802

Phone Number: (417) 862-5684

Email: tateengr@mchsi.com


RECEIVED

NOV 18 2019



MISSOURI DEPARTMENT OF NATURAL RESOURCES
 WATER PROTECTION PROGRAM
**CONTINUING AUTHORITY AND RECEIVING
 WASTEWATER TREATMENT FACILITY ACCEPTANCE**

Water Protection Program

1. PROJECT INFORMATION			
NAME OF PROJECT Forest Lake Estates		DESIGN AVERAGE FLOW (GPD) 17,760	DESIGN PEAK HOURLY FLOW (GPH) 3,004.4
ADDRESS W Forest Lane		CITY Republic	STATE MO ZIP CODE 65738
PROJECT DESCRIPTION Approx. 2214 lin.ft. 8" dia. PVC gravity sanitary sewer line with 9 manholes and all fittings, service connections, appurtenances, etc for a complete project serving 48 single family residential lots			
2. PROJECT OWNER			
NAME Blake Cantrell		TELEPHONE NUMBER WITH AREA CODE (417) 840-1661	EMAIL ADDRESS blakecansell@gmail.com
ADDRESS 108 W MO-174		CITY Republic	STATE MO ZIP CODE 65738
3. CONTINUING AUTHORITY: A continuing authority is a company, business, entity or person(s) that will be operating the facility and/or ensuring compliance with the permit requirements. A continuing authority is not, however, an entity or individual that is contractually hired by the permittee to sample or operate and maintain the system for a defined time period, such as a certified operator or analytical laboratory. To access the regulatory requirement regarding continuing authority, 10 CSR 20-6.010(2), please visit https://s1.sos.mo.gov/cms/mageds/adrules/csr/current/10csr/10c20-6.pdf . A continuing authority's name must be listed exactly as it appears on the Missouri Secretary of State's (SoS's) webpage: https://bsd.sos.mo.gov/BusinessEntity/BESearch.aspx?SearchType=0 , unless the continuing authority is an individual(s), government, or otherwise not required to register with the SoS.			
CONTINUING AUTHORITY NAME City of Republic		TELEPHONE NUMBER WITH AREA CODE 417-732-3405	EMAIL ADDRESS gbrickner@republicmo.com
ADDRESS 204 North Main Avenue		CITY Republic	STATE MO ZIP CODE 65738
AUTHORIZED SIGNATURE 		TITLE OR CORPORATE POSITION City Engineer	
PRINTED NAME Garrett Brickner		DATE 11/07/2019	
4. RECEIVING WASTEWATER TREATMENT FACILITY: The treatment facility agrees to accept and maintain the capacity to treat the wastewater flow from this project.			
RECEIVING TREATMENT FACILITY NAME City of Republic Wastewater Treatment Plant		TELEPHONE NUMBER WITH AREA CODE 417-732-3405	EMAIL ADDRESS gbrickner@republicmo.com
ADDRESS 213 North Main Avenue		CITY Republic	STATE MO ZIP CODE 65738
MISSOURI STATE OPERATING PERMIT # MO-0022098	DESIGN FLOW (GPD) 3,200,000	EXISTING AVERAGE DAILY FLOW (GPD) 1,600,000	REMAINING AVERAGE DAILY FLOW CAPACITY (GPD) 1,600,000
AUTHORIZED SIGNATURE 		TITLE OR CORPORATE POSITION City Engineer	
PRINTED NAME Garrett Brickner		DATE 11/07/2019	
Mail completed form to: MISSOURI DEPARTMENT OF NATURAL RESOURCES WATER PROTECTION PROGRAM ATTN: ENGINEERING SECTION P.O. BOX 176 JEFFERSON CITY, MO 65102-0176			