GEOTECHNOLOGY, INC.

001-00023

G02135

Amax 002
CF-102

Date: June 5, 1976
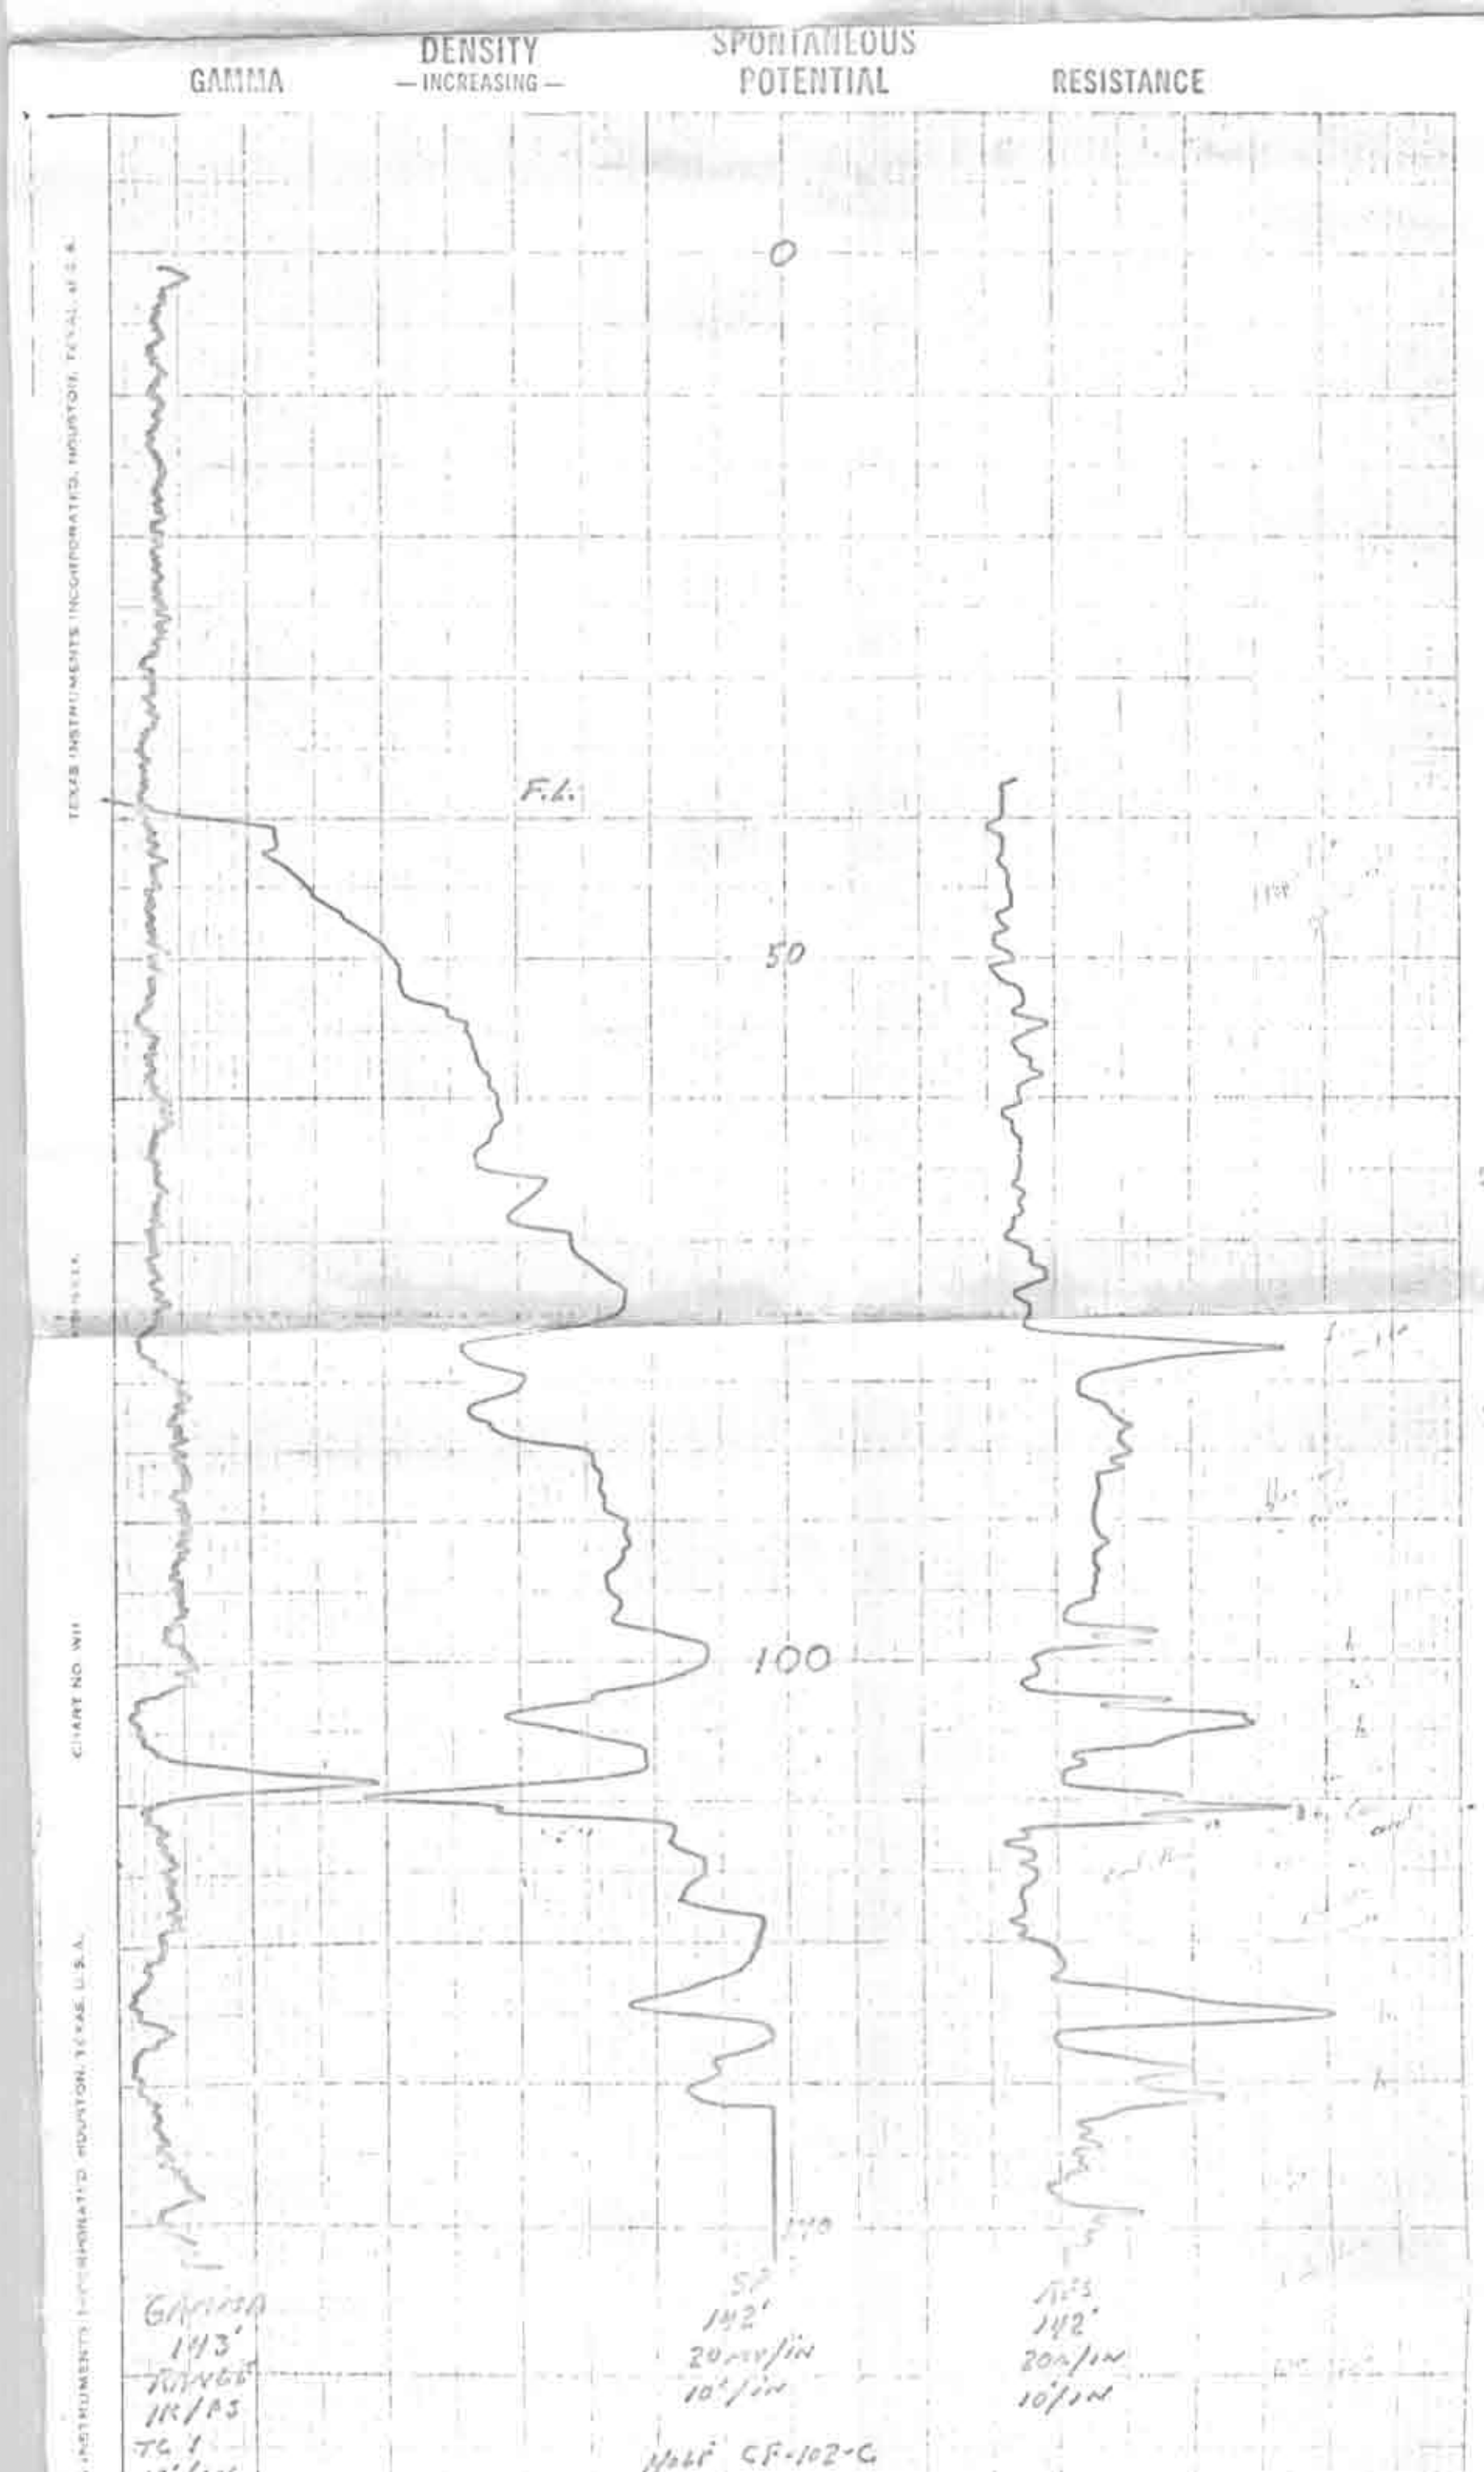
HOLE NUMBER: CF-102-A 002	GAMMA — DENSITY GAMMA				ELECTRIC		
Well Name:					Logged Depth (ft.)	142	142
Elevation:	Logged Depth (ft.)	143			Resist. Scale	20	
Depth Drilled: 150	Range	1K			S.P. Scale		20
Log Measured From: GROUND LEVEL	Time Constant (sec.)	1			Logging Speed	20	20
State/County: NO. 1 AVAIR	Logging Speed	20			Viscosity - Density		
Region:	Paper Speed	10			Rm = T °F		
Project:	Probe Number	6100			Rmf = T °F		
Location: SE NE SE SW SE	Probe Dia. (in.)	1 1/4			Rmc = T °F		
Sec. 29 Twp. 64N Rng. 17W	Crystal Size (in.)	1/2 x 2			SPECIAL RUN		
CLIENT: AMAX CORP.	Digital Residual (ft.)				Logged Depth (ft.)	Survey:	
Owner: AMAX LAND CO.	Time Base (sec.)				Scale		
Drilling Co.: TETON	Dead Time (μ sec.)	10.7x10^-6			Paper Speed		
Engineer: STEVE ROATS	Digital Dead Time (μ sec.)				Logging Speed		
Unit Operator: G. REYNOLDS	Water Factor ( ) in. Hole						
Unit Number: L-6	Casing Factor ( ) in. Steel						
Job Number: 025.02	K—Factor (x 10)	5.6			CASING — HOLE DATA		
REMARKS:	Calibration				Bit Size: 4 3/4 in., 0 to 150 ft.		
	Standard (cps) 1.42	100			Bit Size: in., to ft.		
	Bkgnd. Count (cps)				Cased From: to: ft.		
					Dia. (inside): in., wall size in.		
					Cased From: to: ft.		
					Dia. (inside): in., wall size in.