Date	Oct 6 & 7
Run No.	1
Depth Driller	8500
Depth Logger	8500
Bottom Logged Interval	8500
Top Log Interval	7500
Casing Driller	9 5/8 @ 7500
Casing Logger	7500
Bit Size	8 1/2
Type Fluid in Hole	Gel Chem
Viscosity	45
Density	9.2
Fluid Level	Full
Max. Rec. Temp.	175
Equipment Number	1
Location	Vernal
Recorded By	Gill
Witnessed By	Mr. Ashby

COUNTY
FIELD or LOCATION
WELL
COMPANY

SHELL OIL COMPANY
WELL: C.I. 11
FIELD: Altamont Bluebell
COUNTY: Duchesne
STATE: Utah
LOCATION: 1/4 S.E. 1/4 Sec. 31 T. 2 S. R. 3 W. U.S.M.
Other Services: Gamma Ray Neutron
Permanent Datum: Ground Level
Log Measured From: K.B. 10 Ft. Above Perm. Datum
Elev.: K.B. 5875 D.F. 5865 G.L. 5852

REMARKS: Using Steel Sinker

Changes in Mud Type or Additional Samples

Date	Sample No.	Depth

Scale Changes:

Type Log	Depth	Scale Up Hole	Scale Down Hole

Type Fluid in Hole

Density	Visc.		
pH	Fluid Loss	ml	ml

Source of Sample

Rm @ Meas. Temp.	@	°F	@	°F
Rmf @ Meas. Temp.	@	°F	@	°F
Rmc @ Meas. Temp.	@	°F	@	°F
Source Rmf Rmc				
Rm @ BHT	@	°F	@	°F
Rmf @ BHT			@	°F
Rmc @ BHT			@	°F

Equipment Data

Run No.	Tool Type	Pad Type	Tool No.	Other

FALCON
Rm 1.45 @ 75 °F
Rmf 1.14 @ 75 °F
Rmc 1.25 @ 75 °F

FALCON
Rm .84 @ 175 °F
Rmf .66 @ 175 °F
Rmc .73 @ 175 °F
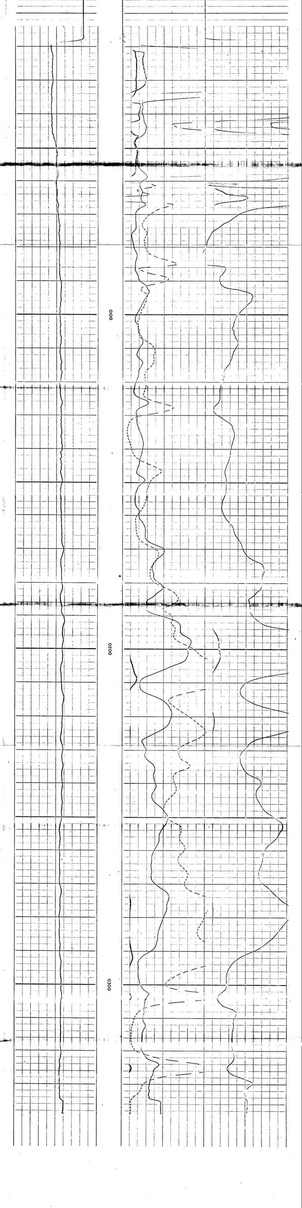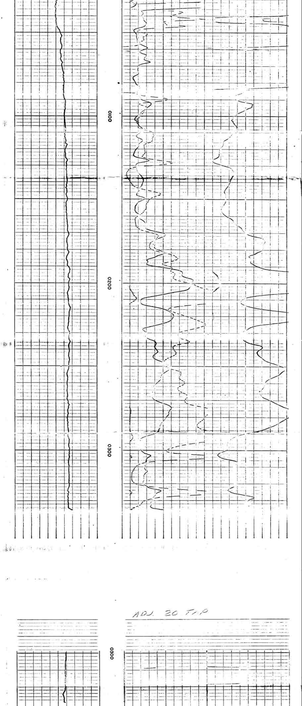
SPONTANEOUS POTENTIAL millivolts	Depth	RESISTIVITY ohms. m²/m SHORT NORMAL 16" NORMAL	RESISTIVITY ohms. m²/m LONG NORMAL 64" NORMAL
10 — +		0 — 50	0 — 50
			200 — 50
		18" LATERAL 16" NORMAL	
		0 — 50