COMPANY Sneed Oil Company

WELL Test Hole (Bustos) #15-C

FIELD U.G.

COUNTY Vernon STATE NM

LOCATION: 1468 SNL & 40' EWL

Sec. 30 Twp. 34N Rge. 32W

Elev. 830 Ft. Above Perm. Datum

Elev.: K.B. D.F. G.L. 838

Date 4-4 4-5

Run No. 1 1

Depth—Driller 1169 1169

Depth—Logger 1168 1168

Bottom Log Interval 1168 1168

Top Log Interval - 20

Casing—Driller 4 3/4" @ 20

Casing—Logger

Bit Size 4 3/4" 4 3/4"

Type Fluid in Hole Mistake Mistake

Dens. — — Visc. — —

pH — Fluid Loss — — ml ml

Source of Sample Flow line Flow line

Rm @ Meas. Temp. .68 @ 75°F @ °F

Rmf @ Meas. Temp. .68 @ 75°F @ °F

Rmc @ Meas. Temp. .68 @ 75°F @ °F

Source: Rmf Rmc M M

Rm @ BHT .61 @ 75°F @ °F

Rmf @ BHT .61 @ 75°F @ °F

Rmc @ BHT .61 @ 75°F @ °F

Max. Rec. Temp. 85 85 °F

Equip. Location Hobbs Hobbs

Recorded By Sutherland Sutherland

Witnessed By Howard

COUNTY
FIELD OR LOCATION
WELL

COMPANY

Other Services:

REMARKS

Changes in Mud Type or Additional Samples

Date	Sample No.				
Depth—Driller					
Type Fluid in Hole					
Dens.	Visc.				
pH	Fluid Loss	ml		ml	
Source of Sample					
Rm @ Meas. Temp.	@ °F	@ °F			
Rmf @ Meas. Temp.	@ °F	@ °F			
Rmc @ Meas. Temp.	@ °F	@ °F			
Source: Rmf Rmc	M	M			
Rm @ BHT	@ °F	@ °F			
Rmf @ BHT	@ °F	@ °F			
Rmc @ BHT	@ °F	@ °F			

Scale Changes

Type Log	Depth	Scale Up Hole	Scale Down Hole

Equipment Data

Run No.	Tool Type	Pad Type	Tool Pos.	Other

RM

Meas. Temp.	BHT
Rm 2.77 @ 83	3.43 @ 67
Rmf 2.22 @ 85	2.74 "
Rmc 4.70 @ 85	5.96 "

RM

Meas. Temp.	BHT
2.95 @ 84	3.7 @ 67
2.5 @ 84	3.14 "
5.0 @ 85	6.34 "
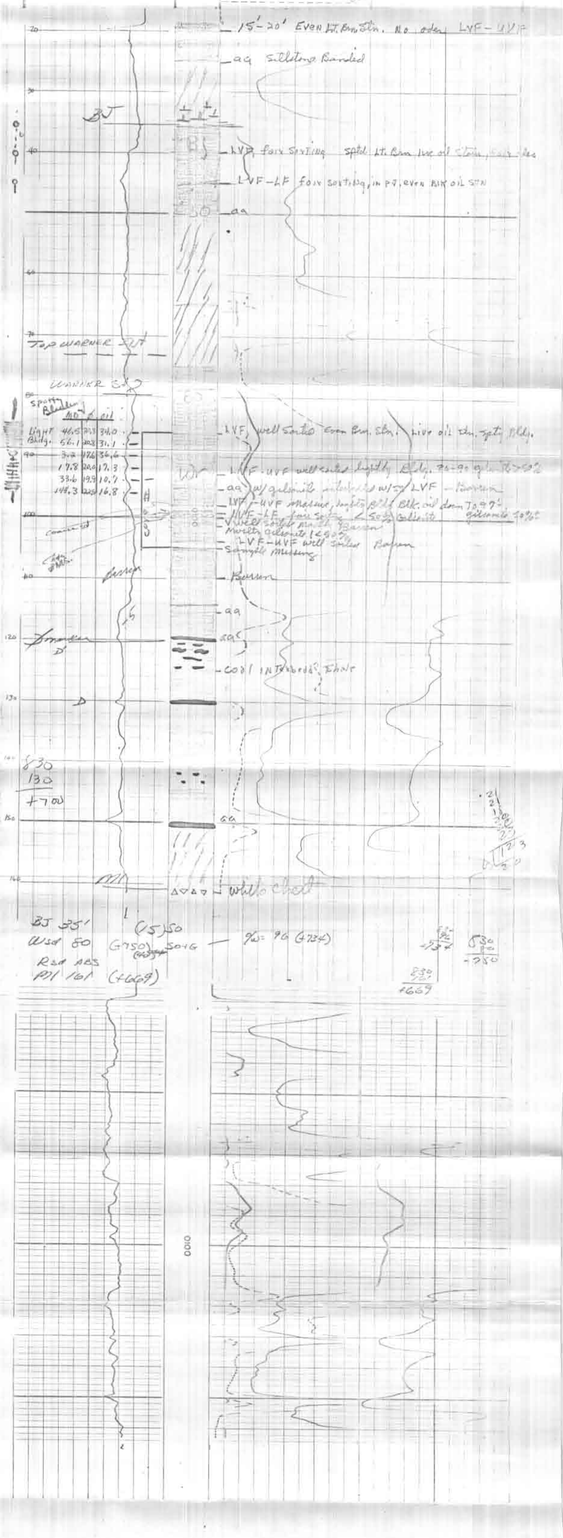
SPONTANEOUS POTENTIAL millivolts	Depths	RESISTIVITY ohms. m²/m	RESISTIVITY ohms. m²/m
		SHORT NORMAL AM=8" 0 — 50 / 0 — 500	LONG NORMAL 0 — 50 / 0 — 500
		18'8" LATERAL 0 — 50 / 0 — 500