SCHLUMBERGER

ELECTRICAL LOG

SCHLUMBERGER WELL SURVEYING CORPORATION

COUNTY / FIELD or LOCATION / WELL: J M D.

COMPANY: SHELL OIL CO.

WELL: 13A-16-6-9

FIELD: [illegible]

LOCATION: 10' FSL & 30' FEL

COUNTY: [illegible]

STATE: [illegible]

Other Surveys: [illegible]

Location of Well: [illegible]

Elevation: D.F. [illegible] K.B. [illegible] or G.L. [illegible]

FILING No.:

RUN No.	1			
Date	7-27-72			
First Reading	113			
Last Reading	30			
Feet Measured	83			
Csg. Schlum.	None			
Csg. Driller				
Depth Reached	116			
Bottom Driller	116			
Depth Datum	G.L.			
Mud Nat.	Natural			
Dens. Visc.	8.8 [illegible]			
Mud Resist.	2.1 @ 1.2 °F			
" Res. BHT	2.1 @ 1.2 °F			
" Rmf	1.0 @ 1.5 °F	2.2 @ 1.1 °F	°F	°F
Rmc	— @ — °F	°F	°F	°F
" Rmf	— @ — °F	°F	°F	°F
" Rmc	— @ — °F	°F	°F	°F
Bit Size	4 7/8"			
Wtr. Loss	— CC 30 min.	CC 30 min.	CC 30 min.	CC 30 min.
Spcgs—AM	4 1/2"			
" PM	4 1/2"			
AO	1 1/2"			
Opr. Rig Time	5 1/2 hr			
Truck No.	5 1/2 hr			
Recorded By	Lucas			
Witness	Smith-Shell, Fuller-Phillips			

FOLD HERE

REMARKS

SPONTANEOUS-POTENTIAL millivolts	DEPTHS	RESISTIVITY ohms. m²/m	RESISTIVITY ohms. m²/m
− 10 +		16" NORMAL 0 50 / 0 500	
		18'-8" LATERAL 0 50 / 0 500	64" NORMAL 0 50 / 0 500

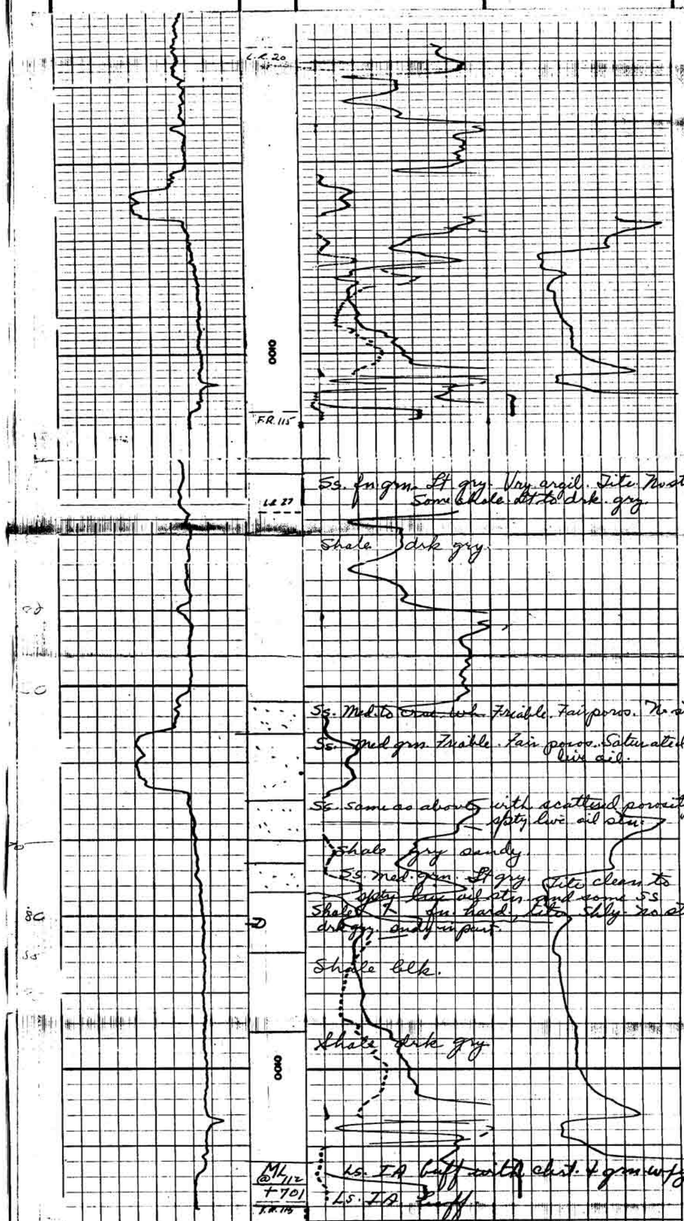

85 loaded
W loaded (726) 55 w 55
R 805
ml 1701

SPONTANEOUS-POTENTIAL millivolts	DEPTHS	RESISTIVITY ohms. m²/m	RESISTIVITY ohms. m²/m
− 10 +		16" NORMAL 0 50 / 0 500	
		18'-8" LATERAL 0 50 / 0 500	64" NORMAL 0 50 / 0 500

COMPANY: SHELL OIL CO.

WELL: 13A-16-6-9

Rm: 2.1 @ 78 °F

Rmf: 2.1 @ 82 °F

Rmc: @ °F

SWSC FR: 115

SWSC TD: 116

DRLR TD: 116