INDUCTION ELECTRICAL LOG

COMPANY: THE GRANT Co.
WELL: GILSTRAP #1
FIELD: E. STOCKSBURY
STATE: MISSOURI COUNTY: VERNON

LOCATION: SEC. 35 TWP. 33N RGE. 31W
NW NW NW

OTHER SERVICES:

Permanent Datum: GL Elev. 830
Log Measured From: KB 10 Above Perm. Datum
Drilling Measured From: GL

Date: 8-8---
Run No.: --
Depth-Driller: 330
Depth-Logger: 330
Bottom Log Interval: 330
Top Log Interval: 30
Casing-Driller: 8 5/8 @ 30
Casing-Logger: --
Bit Size: 7 7/8
Type Fluid in Hole: GEL

Max. Rec. Temp.	°F				
Est. Cement Top					
Time Since Circ.	Hrs.				
Time Since Stopped In Hole	Hrs.				
Equip. Location					
Recorded By					
Witnessed By					

Fold Here

This Heading and Log Conform To API RP-31

REMARKS

Changes in Mud Type or Additional Samples

Date	Sample No.				
Depth—Driller					
Type Fluid in Hole					
Density	Visc.				
pH	Fluid Loss		ml		ml
Source of Sample					
R_m @ Meas. Temp.	@ °F	@ °F			
R_{mf} @ Meas. Temp.	@ °F	@ °F			
R_{mc} @ Meas. Temp.	@ °F	@ °F			
Source: Rmf / Rmc					
R_m @ BHT	@ °F	@ °F			
R_{mf} @ BHT	@ °F	@ °F			
R_{mc} @ BHT	@ °F	@ °F			

Scale Changes

Type Log	Depth	Scale Up Hole	Scale Down Hole

Equipment Data

Run No.	Tool Type	Pad Type	Tool Position	Other

SPONTANEOUS POTENTIAL
millivolts

Depth

CONDUCTIVITY
millimhos/m = 1000 / ohm. m²/m

6 Coil 40" INDUCTION
1000 — 0

RESISTIVITY
ohms. m²/m

SHORT NORMAL
A - 16" - M - 18'8" - N - ∞ - B
0 — 50
0 — 500

40" INDUCTION RESISTIVITY
0 — 50
0 — 500

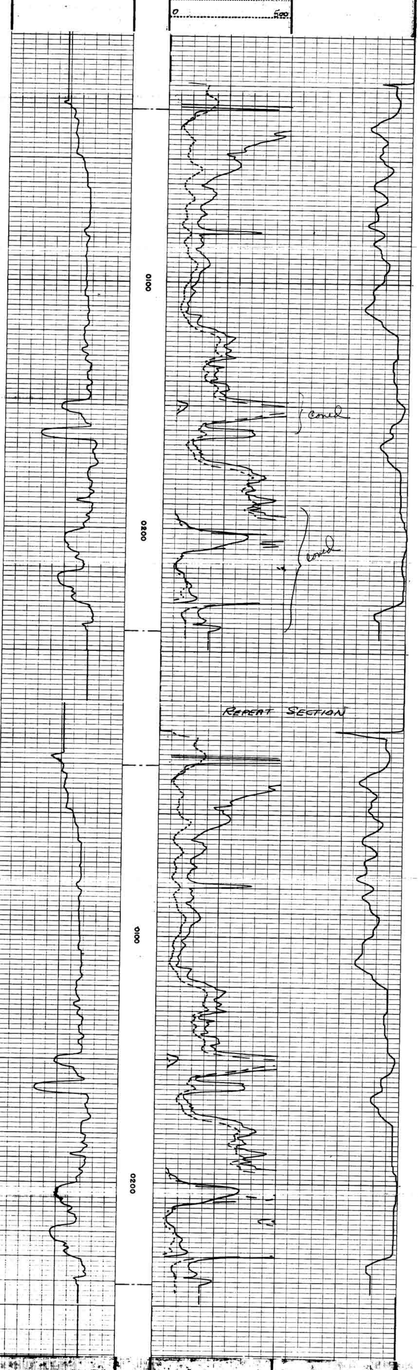

0 — 50
0 — 500

40" INDUCTION RESISTIVITY
SHORT NORMAL
A - 16" - M - 18'8" - N - ∞ - B
0 — 50
0 — 500

RESISTIVITY
ohms. m²/m

1000 — 0

6 Coil 40" INDUCTION

SPONTANEOUS POTENTIAL
millivolts

Depth

CONDUCTIVITY
millimhos/m = 1000 / ohm. m²/m

COMPANY THE GRANT Co.
WELL GILSTRAP
FIELD E. STOCKSBURY STATE MISSOURI
LOC. 35-33N-31W COUNTY VERNON

Rm 4.4 @ 43 °F
Rmf 8.1 @ 43 °F
Rmc 6.2 @ 43 °F
BHT — °F

GO
GO
DRLR TD
Elev.:
KB
DF
GL 830

FR
TD