G02398 OGC# 21766

CONFIDENTIAL

CORNISH

WIRELINE SERVICES, INC.

PHONE 431-9308 P.O. DRAWER H CHANUTE, KANSAS

CEMENT BOND — VARIABLE DENSITY

FILING NO.

COMPANY CARMEL ENERGY, INC.

WELL IDA FAUVERGUE NO. IF-N12U

FIELD

COUNTY VERNON STATE MISSOURI

RECEIVED APR 05 1985 MO. OIL & GAS COUNCIL

LOCATION 2232.14' W TO W.L. 2396.04' S TO S.L. 121.04' N82W T26

Sec. 33 Twp. 35N Rge. 33W

OTHER SERVICES: MSG: 3-18-85

Permanent Datum: GROUND LEVEL, Elev. 807.6'

Log Measured from G.L. Ft. Above Perm. Datum

Drilling Measured From G.L.

Elev.: K.B. D.F. G.L. 807.6'

Date	3-18-85	Type Fluid in Hole	WATER/FULL
Run No.	1 NW	Dens. / Visc.	
Depth—Driller		Max. Rec. Temp.	
Depth—Logger	152.9'	Est. Cement Top	
Btm. Log Interval	147.1'	Equip. / Location	104 C., KS.
Top Log Interval	6.0'	Recorded By	GORMLEY, R.
Open Hole Size		Witnessed By	STUESSE, G.

CASING REC.	Size	Wt/Ft	Grade	Type Joint	Top	Bottom
Surface String						
Prot. String						
Prod. String	4-1/2"				0	T.D.
Liner						

PRIMARY CEMENTING DATA

STRING	Surface	Protection	Production	Liner
Vol. of cement				
Type of cement				
Additive				
Additive by %				
Retarder				
Retarder by %				
Wt. of slurry				
Water loss				
Drill. mud type				
Drilling mud wt.				

FOLD HERE

COMPRESSIVE STRENGTH (p.s.i. Curing Temp.)

Time Elapsed	Surface	Protective	Production	Liner
24 hrs.	°F	°F	°F	°F
48 hrs.	°F	°F	°F	°F
72 hrs.	°F	°F	°F	°F

PRIMARY CEMENTING PROCEDURE

	Hour — date	Hours from start of operation
Started pumping cement		
Plug on bottom		
Release pressure		
Start Cement Bond Log		
Finish Cement Bond Log		

Equipment Data

Type standoff

Logging speed

Bias: Max.

Cartridge No.

Spacing

Preceding fluid Volume bbls. Pipe reciprocated during Pumping: Yes No

Returns: Full Partial None Pipe reciprocated after plug down: Yes min., No

NSCO-18084

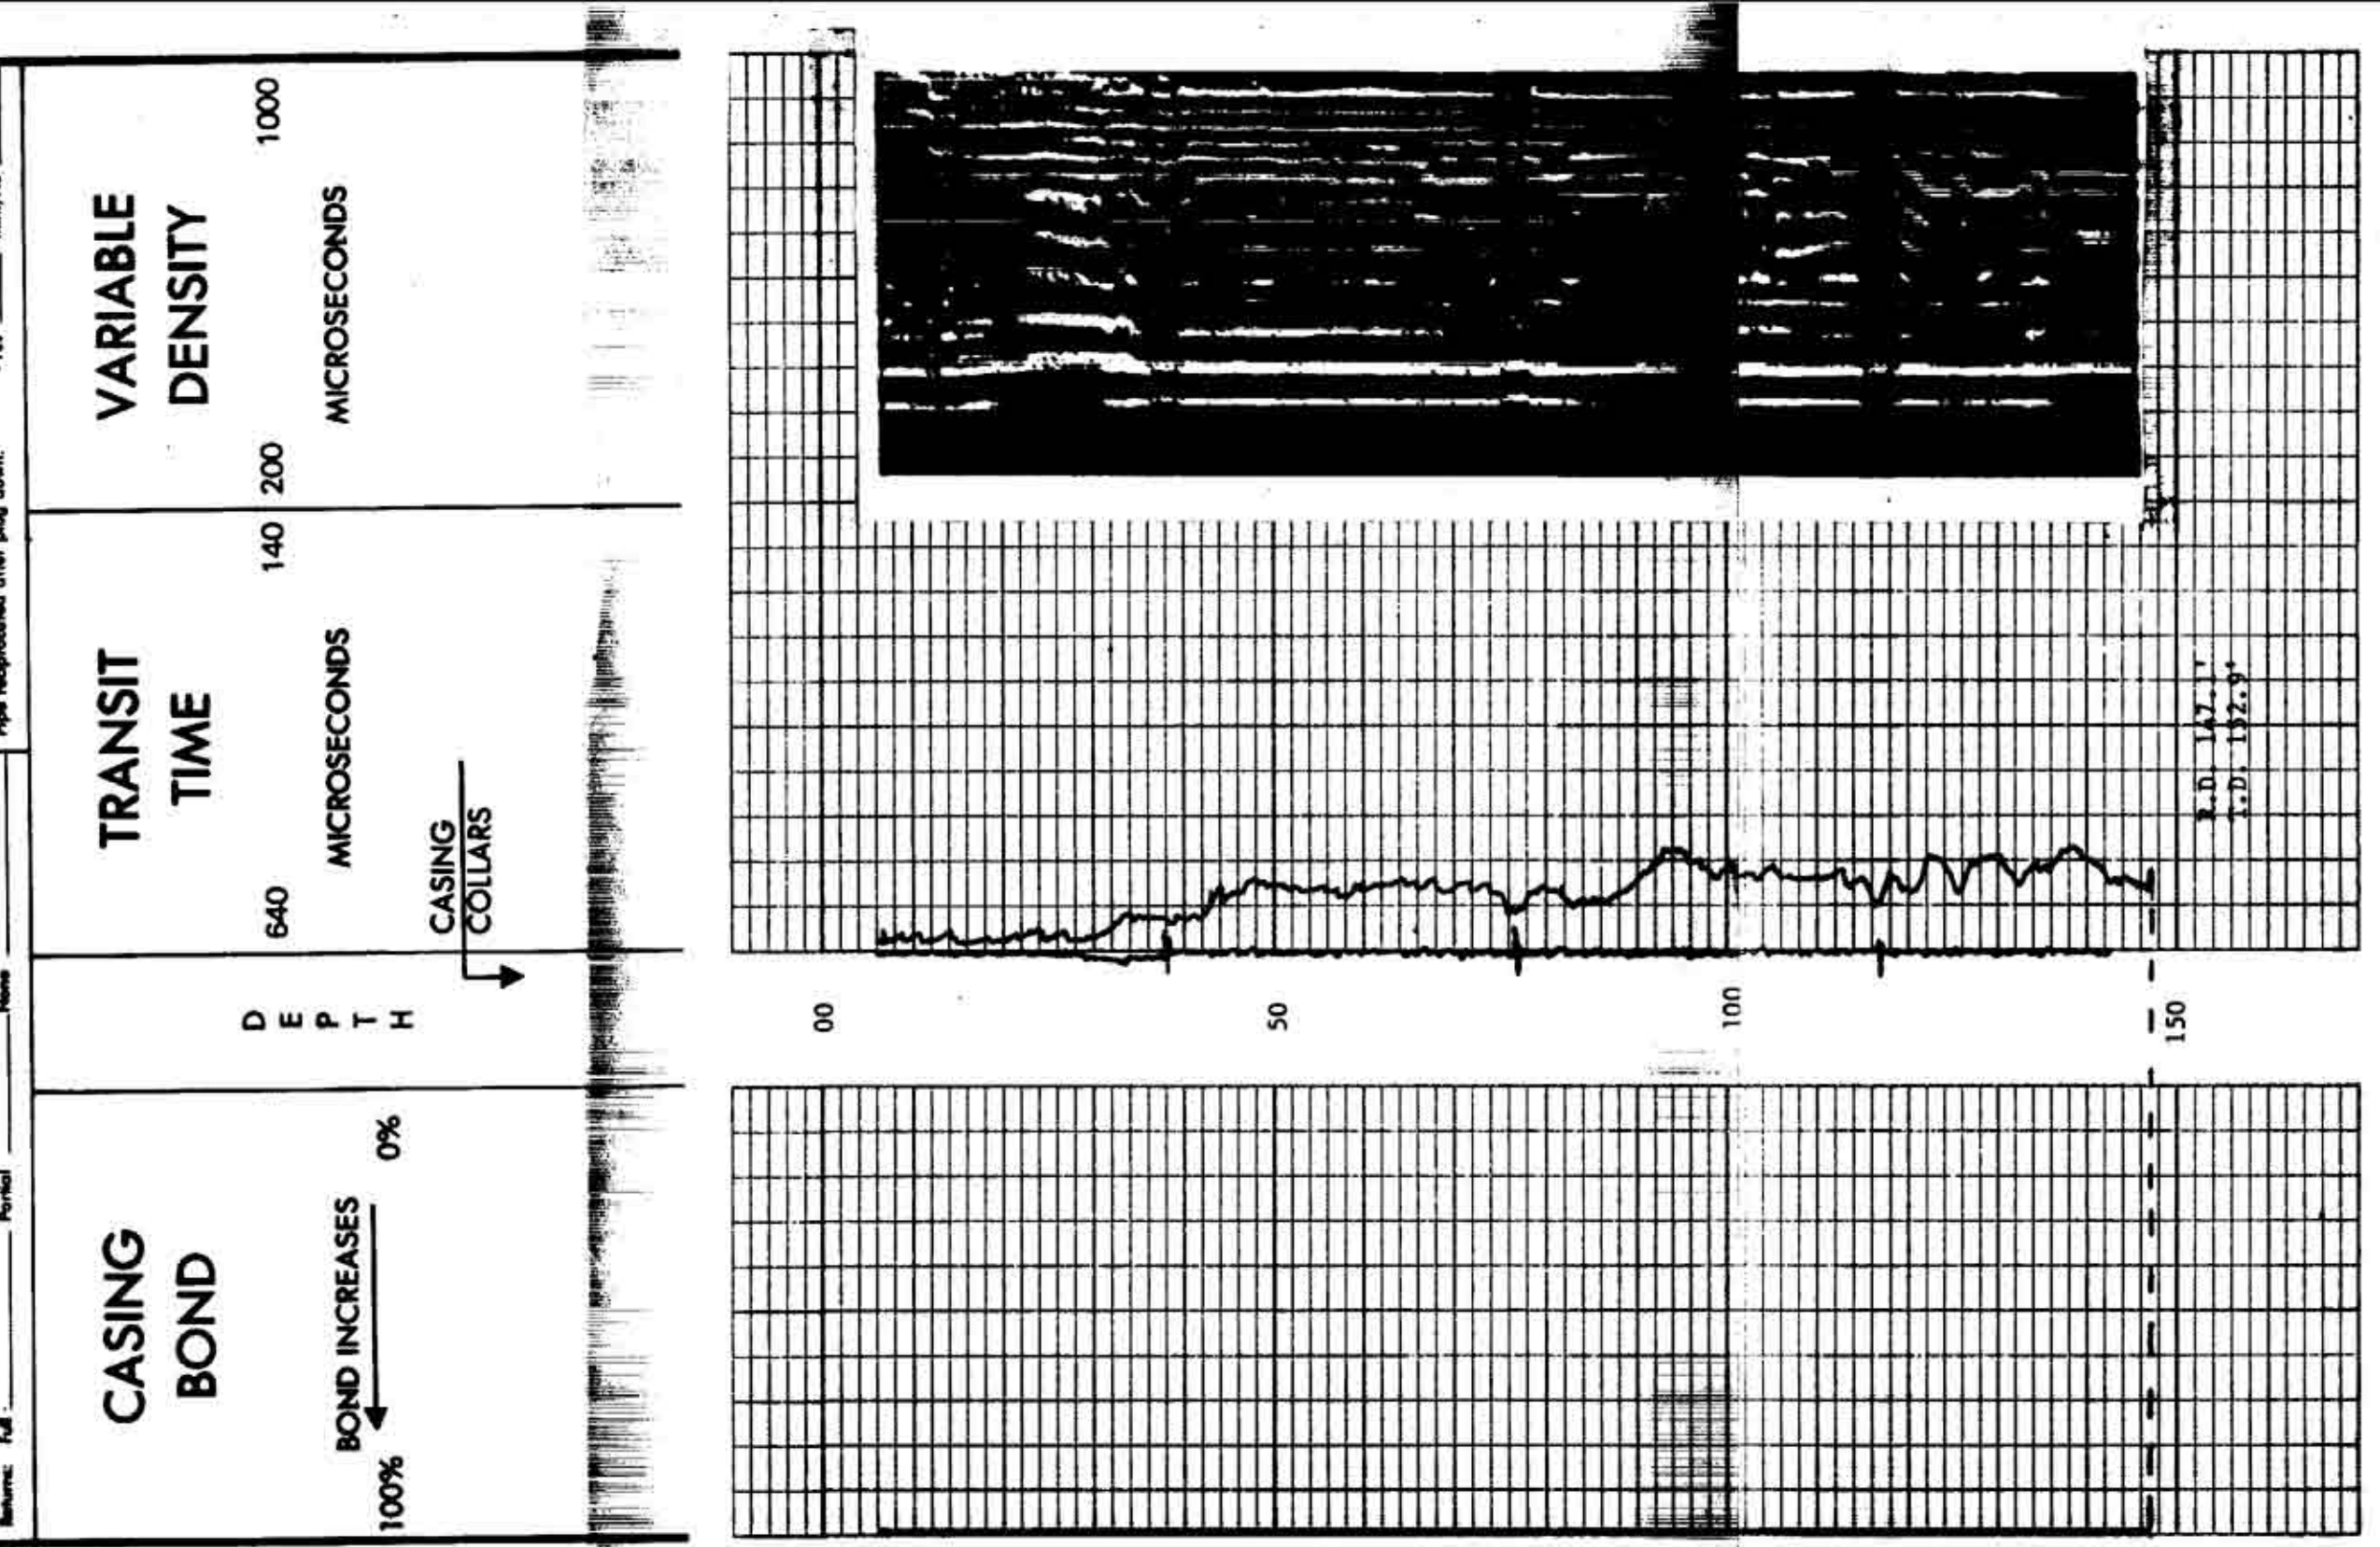

IDA FAUVERGUE NO. IF-N12U

CARMEL ENERGY, INC.

VERNON COUNTY, MISSOURI

MARCH 18, 1985

BOND/MSG

33/35N/33W

R