G02395 OGC #21768

CORNISH

WIRELINE SERVICES, INC.
P.O. DRAWER H
CHANUTE, KANSAS
PHONE 431-9308

CEMENT BOND — VARIABLE DENSITY

FILING NO.

COMPANY CARMEL ENERGY, INC.

WELL IDA FAUVERGUE NO. IF-N13U

FIELD

COUNTY VERNON STATE MISSOURI

LOCATION 2404.93' W TO W.L.
2396.04' S TO S.L.

Sec. 33 Twp. 35N Rge. 33W

OTHER SERVICES: MSG: 3-18-85

APR 05 1985
MO. OIL & GAS COUNCIL

Permanent Datum: GROUND LEVEL Elev. 809.6'
Log Measured from G.L. Ft. Above Perm. Datum
Drilling Measured From G.L.

Elev.: K.B. D.F. G.L. 809.6'

Date	3-18-85	Type Fluid in Hole	WATER/FULL
Run No.	1 NW	Dens. / Visc.	
Depth—Driller		Max. Rec. Temp.	
Depth—Logger	150.4'	Est. Cement Top	
Btm. Log Interval	144.6'	Equip. / Location	104 C., K.
Top Log Interval	6.0'	Recorded By	GORMLEY, R.
Open Hole Size		Witnessed By	STUESSE, G.

CASING REC.	Size	Wt/Ft	Grade	Type Joint	Top	Bottom
Surface String						
Prot. String						
Prod. String	4-1/2"				0	T.D.
Liner						

PRIMARY CEMENTING DATA

STRING	Surface	Protection	Production	Liner
Vol. of cement				
Type of cement				
Additive				
Additive by %				
Retarder				
Retarder by %				
Wt. of slurry				
Water loss				
Drill. mud type				
Drilling mud wt.				

FOLD HERE

COMPRESSIVE STRENGTH (p.s.i. Curing Temp.)

Time Elapsed	Surface		Protective		Production		Liner	
24 hrs.		°F		°F		°F		°F
48 hrs.		°F		°F		°F		°F
72 hrs.		°F		°F		°F		°F

PRIMARY CEMENTING PROCEDURE

	Hour — date	Hours from start of operation
Started pumping cement		
Plug on bottom		
Release pressure		
Start Cement Bond Log		
Finish Cement Bond Log		

Equipment Data

Type standoff	
Logging speed	
Bias: Max.	
Cartridge No.	
Spacing	

Preceding fluid _____ Volume _____ bbls.
Returns: Full _____ Partial _____ None _____

Pipe reciprocated during Pumping: Yes _____ No _____
Pipe reciprocated after plug down: Yes _____ min., No _____

CASING BOND		TRANSIT TIME	VARIABLE DENSITY
BOND INCREASES 100% ← 0%	DEPTH	640 140 MICROSECONDS	200 1000 MICROSECONDS
		CASING COLLARS	

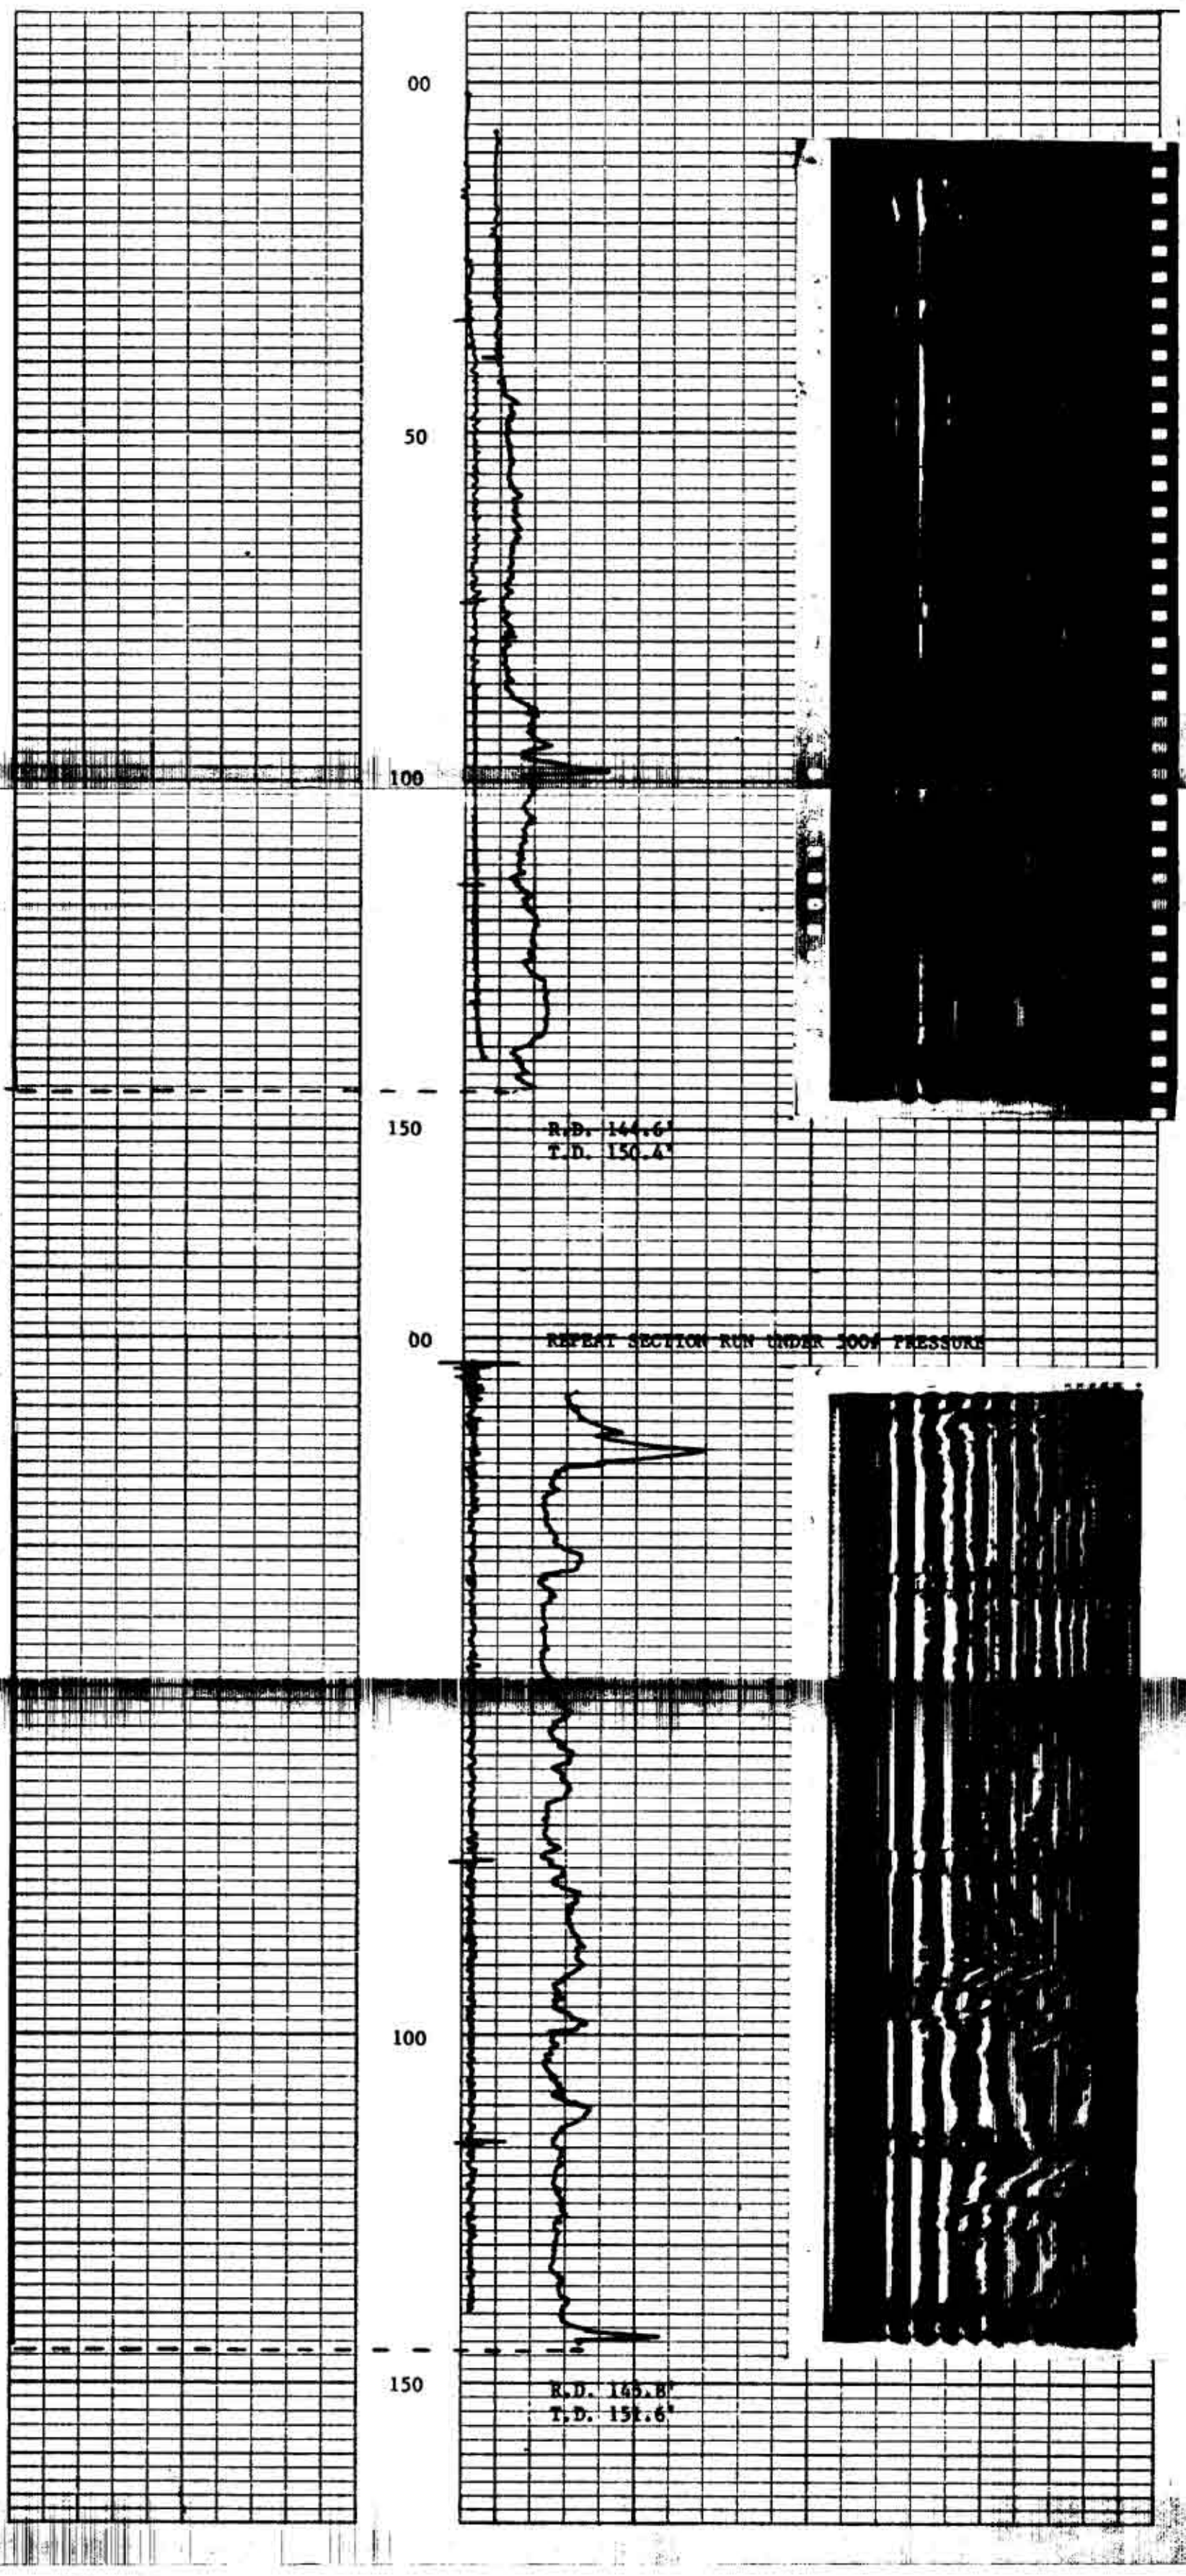

IDA FAUVERGUE NO. IF-N13U

CARMEL ENERGY, INC.

VERNON COUNTY, MISSOURI

MARCH 18, 1985

BOND/MSG

33/35N/33W

R