

PART 70 PERMIT TO OPERATE

Under the authority of RSMo 643 and the Federal Clean Air Act the applicant is authorized to operate the air contaminant source(s) described below, in accordance with the laws, rules, and conditions set forth herein.

Operating Permit Number: OP2010-098
Expiration Date: AUG 22 2015
Installation ID: 145-0005
Project Number: 2006-07-065

Installation Name and Address

La-Z-Boy Midwest
4301 Howard Bush Drive
Neosho, MO 64850
Newton County

Parent Company's Name and Address

La-Z-Boy Incorporated
1284 N Telegraph Rd.
Monroe, MI 48162

Installation Description:

La-Z-Boy Midwest operates a furniture manufacturing plant in Neosho, Missouri. The installation manufactures upholstered furniture on wood frames. The installation also supplies other La-Z-Boy plants with the finished metal parts that are assembled into recliner mechanisms. Operations include three spray adhesive booths, an aqueous degreaser tank, an electro deposition paint machine and a paint oven.

AUG 23 2010

Effective Date

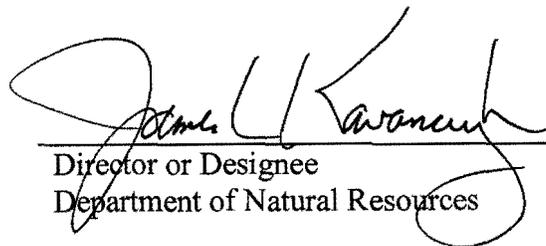

Director or Designee
Department of Natural Resources

Table of Contents

I. INSTALLATION DESCRIPTION AND EQUIPMENT LISTING	2
INSTALLATION DESCRIPTION	2
EMISSION UNITS WITH LIMITATIONS	2
EMISSION UNITS WITHOUT LIMITATIONS	2
DOCUMENTS INCORPORATED BY REFERENCE	2
II. PLANT WIDE EMISSION LIMITATIONS.....	2
PERMIT CONDITION PW001	2
10 CSR 10-6.075 Maximum Achievable Control Technology Regulations	2
40 CFR Part 63 Subpart A General Provisions and Subpart JJ National Emission Standards for Wood Furniture Manufacturing Operations.....	2
III. EMISSION UNIT SPECIFIC EMISSION LIMITATIONS	2
EU0010 – POLY ADHESIVE SPRAY BOOTH 1.....	2
EU0020 – POLY ADHESIVE SPRAY BOOTH 2.....	2
EU0030 – POLY ADHESIVE SPRAY BOOTH 3.....	2
PERMIT CONDITION (EU0010 and EU0020)-001	2
10 CSR 10-6.060 Construction Permits Required.....	2
Construction Permit No. 0995-012, Issued September 4, 1995	2
PERMIT CONDITION EU0030-002	2
10 CSR 10-6.060 Construction Permits Required.....	2
Construction Permit No. 0896-004, Issued July 25, 1996.....	2
PERMIT CONDITION (EU0010 through EU0030)-003.....	2
10 CSR 10-6.220 Restriction of Emission of Visible Air Contaminants	2
PERMIT CONDITION (EU0010 through EU0030)-004.....	2
10 CSR 10-6.400 Restriction of Emission of Particulate Matter from Industrial Processes	2
EU0040 – AQUEOUS DEGREASER TANK.....	2
EU0050 – ELECTRO DEPOSITION PAINT MACHINE.....	2
PERMIT CONDITION (EU0040 and EU0050)-001	2
10 CSR 10-6.060 Construction Permits Required.....	2
MDNR Construction Permit No. 072002-011, Issued July 2, 2002.....	2
PERMIT CONDITION (EU0040 and EU0050)-002	2
10 CSR 10-6.220 Restriction of Emission of Visible Air Contaminants	2
IV. CORE PERMIT REQUIREMENTS	2
V. GENERAL PERMIT REQUIREMENTS.....	2
VI. ATTACHMENTS	2
ATTACHMENT A	2
40 CFR Part 63 Subpart JJ, <i>National Emission Standards for Wood Furniture Manufacturing Operations</i>	2
ATTACHMENT B	2
Monthly VOC Tracking Record for EU0040 and EU0050.....	2
ATTACHMENT C	2
Fugitive Emission Observations	2
ATTACHMENT D	2
Opacity Emission Observations	2
ATTACHMENT E	2
Inspection/Maintenance/Repair/Malfunction Log.....	2
ATTACHMENT F.....	2
Method 9 Opacity Emissions Observations	2

I. Installation Description and Equipment Listing

INSTALLATION DESCRIPTION

La-Z-Boy Midwest operates a furniture manufacturing plant in Neosho, Missouri. The installation manufactures upholstered furniture on wood frames. The installation also supplies other La-Z-Boy plants with the finished metal parts that are assembled into recliner mechanisms. Operations include three spray adhesive booths, an aqueous degreaser tank, an electro deposition paint machine and a paint oven.

Reported Air Pollutant Emissions, tons per year								
Year	Particulate Matter ≤ Ten Microns (PM-10)	Particulate Matter ≤ 2.5 Microns (PM-2.5)	Sulfur Oxides (SO _x)	Nitrogen Oxides (NO _x)	Volatile Organic Compounds (VOC)	Carbon Monoxide (CO)	Hazardous Air Pollutants (HAPs)	Ammonia (NH ₃)
2008	0.06	0.05	0.00	0.96	10.81	0.80	0.00	0.02
2007	2.25	0.05	0.00	0.90	11.71	0.75	0.00	0.02
2006	0.85	0.03	0.00	0.71	9.28	0.60	0.00	0.01
2005	3.76	0.02	0.01	0.90	9.67	0.20	0.00	0.01
2004	4.86	3.76	0.05	10.64	11.53	2.64	0.00	0.23

EMISSION UNITS WITH LIMITATIONS

The following list provides a description of the equipment at this installation that emits air pollutants and that are identified as having unit-specific emission limitations.

Emission Unit #	Description of Emission Unit	2008 EIQ ID #
EU0010	Poly Adhesive Spray Booth 1	EP-01
EU0020	Poly Adhesive Spray Booth 2	EP-01
EU0030	Poly Adhesive Spray Booth 3	EP-01
EU0040	Aqueous Degreaser Tank	EP-02
EU0050	Electro Deposition Paint Machine	EP-2B

EMISSION UNITS WITHOUT LIMITATIONS

The following list provides a description of the equipment that does not have unit specific limitations at the time of permit issuance.

Description of Emission Source	2008 EIQ ID #
Electro deposition paint oven, 1.2 MMBtu/hr, natural gas-fired, 1993	EP-03
Two (2) Cleaver-Brooks boilers, 14.645 MMBtu/hr each, natural gas-fired, 1970	EP-08, EP-09
Storage tank, 600-gallon diesel fuel, prior to 1985	EP-12
Storage tank, 600-gallon unleaded gasoline, prior to 1985	EP-13
Storage tank, 300-gallon diesel fuel for fire pump engine, prior to 1985	EP-14
Fire fighting water pump engine, 175 hp diesel-fired	EP-20
Non-spray adhesive application	
Wax application booth	

DOCUMENTS INCORPORATED BY REFERENCE

These documents have been incorporated by reference into this permit.

- 1) MDNR Construction Permit No. 0995-012, Issued September 4, 1995
- 2) MDNR Construction Permit No. 0896-004, Issued July 25, 1996
- 3) MDNR Construction Permit No. 072002-011, Issued July 2, 2002
- 4) 40 CFR Part 63 Subpart JJ, National Emission Standards for Wood Furniture Manufacturing Operations

II. Plant Wide Emission Limitations

The installation shall comply with each of the following emission limitations. Consult the appropriate sections in the Code of Federal Regulations (CFR) and Code of State Regulations (CSR) for the full text of the applicable requirements. All citations, unless otherwise noted, are to the regulations in effect as of the date that this permit is issued.

PERMIT CONDITION PW001

10 CSR 10-6.075 Maximum Achievable Control Technology Regulations
40 CFR Part 63 Subpart A General Provisions and Subpart JJ National Emission Standards for Wood
Furniture Manufacturing Operations

Emission Limitation:

40 CFR Part 63 Subpart JJ is applicable to the installation, the permittee is responsible for complying with all portions of the rule that apply. A copy of Subpart JJ is found in Attachment A.

III. Emission Unit Specific Emission Limitations

The installation shall comply with each of the following emission limitations. Consult the appropriate sections in the Code of Federal Regulations (CFR) and Code of State Regulations (CSR) for the full text of the applicable requirements. All citations, unless otherwise noted, are to the regulations in effect as of the date that this permit is issued.

EU0010 – POLY ADHESIVE SPRAY BOOTH 1 EU0020 – POLY ADHESIVE SPRAY BOOTH 2 EU0030 – POLY ADHESIVE SPRAY BOOTH 3			
Emission Unit	Description	Manufacturer/ Model #	2008 EIQ Reference #
EU0010	Poly Adhesive Spray Booth 1: adhesive (water base) spray booth; MHDR 1.17 gal/hr; controlled with dry filter; installation date 1995	NA	EP-01
EU0020	Poly Adhesive Spray Booth 2: adhesive (water base) spray booth; MHDR 1.17 gal/hr; controlled with dry filter; installation date 1995	NA	EP-01
EU0030	Poly Adhesive Spray Booth 3: adhesive (water base) spray booth; MHDR 1.17 gal/hr; controlled with dry filter; installation date 1996	NA	EP-01

PERMIT CONDITION (EU0010 and EU0020)-001
10 CSR 10-6.060 Construction Permits Required
Construction Permit No. 0995-012, Issued September 4, 1995

Reporting:

If, in the opinion of the Director, a continuing situation of demonstrated nuisance odors exists for the neighbors of the facility, the Director may require the permittee to submit a corrective action plan adequate to timely and significantly mitigate the odors. The permittee shall implement any such plan immediately upon its approval by the Director. Failure to either submit or implement such a plan shall be a violation of the permit. [CP No. 0995-012, Special Condition 1]

PERMIT CONDITION EU0030-002
10 CSR 10-6.060 Construction Permits Required
Construction Permit No. 0896-004, Issued July 25, 1996

Reporting:

If a continuing situation of demonstrated nuisance odors exists in violation of 10 CSR 10-6.060, *Construction Permits Required*, the Director may require the permittee to submit a corrective action plan within ten (10) days adequate to timely and significantly mitigate the odors. The permittee shall implement any such plan immediately upon its approval by the Director. Failure to either submit or implement such a plan shall be a violation of the permit. [CP No. 0896-004, Special Condition 1]

PERMIT CONDITION (EU0010 through EU0030)-003
10 CSR 10-6.220 Restriction of Emission of Visible Air Contaminants

Emission Limitation:

- 1) No owner or other person shall cause or permit to be discharged into the atmosphere from any source any visible emissions with an opacity greater than 20%.
- 2) Exception: A person may discharge into the atmosphere from any source of emissions for a period(s) aggregating not more than six (6) minutes in any 60 minutes air contaminants with an opacity up to 60%.

Monitoring/Recordkeeping/Reporting:

As detailed in Core Permit Requirements.

PERMIT CONDITION (EU0010 through EU0030)-004
10 CSR 10-6.400 Restriction of Emission of Particulate Matter from Industrial Processes

Emission Limitation:

The concentration of particulate matter in the exhaust gases from Poly Adhesive Spray Booths 1, 2, and 3 (EU0010 through EU0030) shall not exceed 0.089 gr/scf.

Monitoring:

- 1) The booths shall not be operated without a filter in place.
- 2) The filters shall be inspected for holes, imperfections, proper installation or other problems that could hinder the effectiveness of the filter.
- 3) The filters shall be inspected each shift before spraying begins in a booth and after installation of a new filter.
- 4) The manufacturer's recommendations shall be followed with regard to installation and frequency of replacement of the filters.

Recordkeeping:

- 1) The permittee shall maintain on the premises of the installation calculations demonstrating compliance with this rule.
- 2) The permittee shall maintain records of the inspections of the filter including when they occur. Attachment E contains a log including these recordkeeping requirements. This log, or an equivalent form created by the permittee, must be used to certify compliance with this requirement.
- 3) These records shall be made available immediately for inspection to the Department of Natural Resources' personnel upon request.
- 4) All records shall be maintained for five (5) years.

Reporting:

The permittee shall report any deviations/exceedances of this permit condition using the semi-annual monitoring report and annual compliance certification to the Air Pollution Control Program's Enforcement Section, P.O. Box 176, Jefferson City, MO 65102, as required by 10 CSR 10-6.065(6)(C)1.C.(III).

EU0040 – AQUEOUS DEGREASER TANK EU0050 – ELECTRO DEPOSITION PAINT MACHINE			
Emission Unit	Description	Manufacturer/ Model #	2008 EIQ Reference #
EU0040	Aqueous Degreaser Tank: metal parts degreaser; MHDR 1 gal/hr; installed 1993	NA	EP-02
EU0050	Electro Deposition Paint Machine: metal parts electro deposition painting; MHDR 2 gal/hr; installed 1993	NA	EP-02B

PERMIT CONDITION (EU0040 and EU0050)-001
10 CSR 10-6.060 Construction Permits Required
MDNR Construction Permit No. 072002-011, Issued July 2, 2002

Emission Limitation:

La-Z-Boy Midwest shall not emit more than 40.0 tons of VOC in any consecutive 12-month period from the electro deposition coating operation (EU0040 and EU0050). [CP No. 072002-011, Special Condition 2.A]

Monitoring/Recordkeeping:

- 1) La-Z-Boy Midwest shall maintain an accurate record of VOC emitted into the atmosphere from the equipment of Construction Permit No. 072002-011. Attachment B or an equivalent form shall be used for this purpose. [CP No. 072002-011, Special Condition 2.B]
- 2) La-Z-Boy Midwest shall maintain all records required by this permit for not less than five (5) years and shall make them available immediately to any Missouri Department of Natural Resources' personnel upon request. [CP No. 072002-011, Special Condition 2.B]

Reporting:

La-Z-Boy Midwest shall report to the Air Pollution Control Program's Enforcement Section, P.O. Box 176, Jefferson City, Missouri 65102, no later than ten (10) days after the end of the month during which the records from indicate that the source exceeds Emission Limitation. [CP No. 072002-011, Special Condition 2.C]

PERMIT CONDITION (EU0040 and EU0050)-002
10 CSR 10-6.220 Restriction of Emission of Visible Air Contaminants

Emission Limitation:

- 1) No owner or other person shall cause or permit to be discharged into the atmosphere from any source any visible emissions with an opacity greater than 20%.
- 2) Exception: A person may discharge into the atmosphere from any source of emissions for a period(s) aggregating not more than six (6) minutes in any 60 minutes air contaminants with an opacity up to 60%.

Monitoring/Recordkeeping/Reporting:

As detailed in Core Permit Requirements.

IV. Core Permit Requirements

The installation shall comply with each of the following regulations or codes. Consult the appropriate sections in the Code of Federal Regulations (CFR) and Code of State Regulations (CSR) for the full text of the applicable requirements. All citations, unless otherwise noted, are to the regulations in effect as of the date that this permit is issued. The following is only an excerpt from the regulation or code, and is provided for summary purposes only.

10 CSR 10-6.045 Open Burning Requirements

- (1) General Provisions. The open burning of tires, petroleum-based products, asbestos containing materials, and trade waste is prohibited, except as allowed below. Nothing in this rule may be construed as to allow open burning which causes or constitutes a public health hazard, nuisance, a hazard to vehicular or air traffic, nor which violates any other rule or statute.
- (2) Refer to the regulation for a complete list of allowances. The following is a listing of exceptions to the allowances:
 - (A) Burning of household or domestic refuse. Burning of household or domestic refuse is limited to open burning on a residential premises having not more than four dwelling units, provided that the refuse originates on the same premises, with the following exceptions:
 1. Kansas City metropolitan area. The open burning of household refuse must take place in an area zoned for agricultural purposes and outside that portion of the metropolitan area surrounded by the corporate limits of Kansas City and every contiguous municipality;
 2. Springfield-Greene County area. The open burning of household refuse must take place outside the corporate limits of Springfield and only within areas zoned A-1, Agricultural District;
 3. St. Joseph area. The open burning of household refuse must take place within an area zoned for agricultural purposes and outside that portion of the metropolitan area surrounded by the corporate limits of St. Joseph; and
 4. St. Louis metropolitan area. The open burning of household refuse is prohibited;
 - (B) Yard waste, with the following exceptions:
 1. Kansas City metropolitan area. The open burning of trees, tree leaves, brush or any other type of vegetation shall require an open burning permit;
 2. Springfield-Greene County area. The City of Springfield requires an open burning permit for the open burning of trees, brush or any other type of vegetation. The City of Springfield prohibits the open burning of tree leaves;
 3. St. Joseph area. Within the corporate limits of St. Joseph, the open burning of trees, tree leaves, brush or any other type of vegetation grown on a residential property is allowed during the following calendar periods and time-of-day restrictions:
 - A. A three (3)-week period within the period commencing the first day of March through April 30 and continuing for twenty-one (21) consecutive calendar days;
 - B. A three (3)-week period within the period commencing the first day of October through November 30 and continuing for twenty-one (21) consecutive calendar days;
 - C. The burning shall take place only between the daytime hours of 10:00 a.m. and 3:30 p.m.; and
 - D. In each instance, the twenty-one (21)-day burning period shall be determined by the Director of Public Health and Welfare of the City of St. Joseph for the region in which the City of St. Joseph is located provided, however, the burning period first shall receive the approval of the Department Director; and

4. St. Louis metropolitan area. The open burning of trees, tree leaves, brush or any other type of vegetation is limited to the period beginning September 16 and ending April 14 of each calendar year and limited to a total base area not to exceed sixteen (16) square feet. Any open burning shall be conducted only between the hours of 10:00 a.m. and 4:00 p.m. and is limited to areas outside of incorporated municipalities;
- (3) Certain types of materials may be open burned provided an open burning permit is obtained from the Director. The permit will specify the conditions and provisions of all open burning. The permit may be revoked if the owner or operator fails to comply with the conditions or any provisions of the permit.
- (4) La-Z-Boy Midwest may be issued an annually renewable open burning permit for open burning provided that an air curtain destructor or incinerator is utilized and only tree trunks, tree limbs, vegetation or untreated wood waste are burned. Open burning shall occur at least two hundred (200) yards from the nearest occupied structure unless the owner or operator of the occupied structure provides a written waiver of this requirement. Any waiver shall accompany the open burning permit application. The permit may be revoked if La-Z-Boy Midwest fails to comply with the provisions or any condition of the open burning permit.
 - (A) In a nonattainment area, as defined in 10 CSR 10-6.020, paragraph (2)(N)5., the Director shall not issue a permit under this section unless the owner or operator can demonstrate to the satisfaction of the Director that the emissions from the open burning of the specified material would be less than the emissions from any other waste management or disposal method.
- (5) Reporting and Record Keeping. New Source Performance Standard (NSPS) 40 CFR Part 60 Subpart CCCC establishes certain requirements for air curtain destructors or incinerators that burn wood trade waste. These requirements are established in 40 CFR 60.2245-60.2260. The provisions of 40 CFR Part 60 Subpart CCCC promulgated as of September 22, 2005, shall apply and are hereby incorporated by reference in this rule, as published by the U.S. Government Printing Office, 732 N Capitol Street NW, Washington, DC 20401. To comply with NSPS 40 CFR 60.2245-60.2260, sources must conduct an annual Method 9 test. A copy of the annual Method 9 test results shall be submitted to the Director.
- (6) Test Methods. The visible emissions from air pollution sources shall be evaluated as specified by 40 CFR Part 60, Appendix A–Test Methods, Method 9–Visual Determination of the Opacity of Emissions from Stationary Sources. The provisions of 40 CFR Part 60, Appendix A, Method 9 promulgated as of December 23, 1971, is incorporated by reference in this rule, as published by the U.S. Government Printing Office, 732 N Capitol Street NW, Washington, DC 20401.

10 CSR 10-6.050 Start-up, Shutdown and Malfunction Conditions
--

- 1) In the event of a malfunction, which results in excess emissions that exceed one hour, the permittee shall submit to the Director within two business days, in writing, the following information:
 - a) Name and location of installation;
 - b) Name and telephone number of person responsible for the installation;
 - c) Name of the person who first discovered the malfunction and precise time and date that the malfunction was discovered.
 - d) Identity of the equipment causing the excess emissions;
 - e) Time and duration of the period of excess emissions;
 - f) Cause of the excess emissions;
 - g) Air pollutants involved;
 - h) Best estimate of the magnitude of the excess emissions expressed in the units of the applicable requirement and the operating data and calculations used in estimating the magnitude;

- i) Measures taken to mitigate the extent and duration of the excess emissions; and
 - j) Measures taken to remedy the situation that caused the excess emissions and the measures taken or planned to prevent the recurrence of these situations.
- 2) The permittee shall submit the paragraph 1 information list to the Director in writing at least ten days prior to any maintenance, start-up or shutdown, which is expected to cause an excessive release of emissions that exceed one hour. If notice of the event cannot be given ten days prior to the planned occurrence, it shall be given as soon as practicable prior to the release. If an unplanned excess release of emissions exceeding one hour occurs during maintenance, start-up or shutdown, the Director shall be notified verbally as soon as practical during normal working hours and no later than the close of business of the following working day. A written notice shall follow within ten working days.
 - 3) Upon receipt of a notice of excess emissions issued by an agency holding a certificate of authority under Section 643.140, RSMo, the permittee may provide information showing that the excess emissions were the consequence of a malfunction, start-up or shutdown. The information, at a minimum, should be the paragraph 1 list and shall be submitted not later than 15 days after receipt of the notice of excess emissions. Based upon information submitted by the permittee or any other pertinent information available, the Director or the commission shall make a determination whether the excess emissions constitute a malfunction, start-up or shutdown and whether the nature, extent and duration of the excess emissions warrant enforcement action under Section 643.080 or 643.151, RSMo.
 - 4) Nothing in this rule shall be construed to limit the authority of the Director or commission to take appropriate action, under Sections 643.080, 643.090 and 643.151, RSMo to enforce the provisions of the Air Conservation Law and the corresponding rule.
 - 5) Compliance with this rule does not automatically absolve the permittee of liability for the excess emissions reported.

10 CSR 10-6.060 Construction Permits Required

The permittee shall not commence construction, modification, or major modification of any installation subject to this rule, begin operation after that construction, modification, or major modification, or begin operation of any installation which has been shut down longer than five years without first obtaining a permit from the permitting authority.

10 CSR 10-6.065 Operating Permits

The permittee shall file a complete application for renewal of this operating permit at least six months before the date of permit expiration. In no event shall this time be greater than eighteen months. [10 CSR 10-6.065(6)(B)1.A(V)] The permittee shall retain the most current operating permit issued to this installation on-site. [10 CSR 10-6.065(6)(C)1.C(II)] The permittee shall immediately make such permit available to any Missouri Department of Natural Resources' personnel upon request. [10 CSR 10-6.065(6)(C)3.B]

10 CSR 10-6.110 Submission of Emission Data, Emission Fees and Process Information

- 1) The permittee shall complete and submit an Emission Inventory Questionnaire (EIQ) annually.
- 2) The permittee may be required by the Director to file additional reports.
- 3) Public Availability of Emission Data and Process Information. Any information obtained pursuant to the rule(s) of the Missouri Air Conservation Commission that would not be entitled to confidential treatment under 10 CSR 10-6.210 shall be made available to any member of the public upon request.

- 4) The permittee shall pay an annual emission fee per ton of regulated air pollutant emitted according to the schedule in the rule. This fee is an emission fee assessed under authority of RSMo. 643.079 to satisfy the requirements of the Federal Clean Air Act, Title V.
- 5) The permittee shall complete required reports on state supplied EIQ forms or in a form satisfactory to the Director and the reports shall be submitted to the Director by June 1 after the end of each reporting period.
- 6) The reporting period shall end on December 31 of each calendar year. Each report shall contain the required information for each emission unit for the twelve (12)-month period immediately preceding the end of the reporting period.
- 7) The permittee shall collect, record and maintain the information necessary to complete the required forms during each year of operation of the installation.

10 CSR 10-6.130 Controlling Emissions During Episodes of High Air Pollution Potential

This rule specifies the conditions that establish an air pollution alert (yellow/orange/red/purple), or emergency (maroon) and the associated procedures and emission reduction objectives for dealing with each. The permittee shall submit an appropriate emergency plan if required by the Director.

10 CSR 10-6.150 Circumvention

The permittee shall not cause or permit the installation or use of any device or any other means which, without resulting in reduction in the total amount of air contaminant emitted, conceals or dilutes an emission or air contaminant which violates a rule of the Missouri Air Conservation Commission.

10 CSR 10-6.170

Restriction of Particulate Matter to the Ambient Air Beyond the Premises of Origin

Emission Limitation:

- 1) The permittee shall not cause or allow to occur any handling, transporting or storing of any material; construction, repair, cleaning or demolition of a building or its appurtenances; construction or use of a road, driveway or open area; or operation of a commercial or industrial installation without applying reasonable measures as may be required to prevent, or in a manner which allows or may allow, fugitive particulate matter emissions to go beyond the premises of origin in quantities that the particulate matter may be found on surfaces beyond the property line of origin. The nature or origin of the particulate matter shall be determined to a reasonable degree of certainty by a technique proven to be accurate and approved by the Director.
- 2) The permittee shall not cause nor allow to occur any fugitive particulate matter emissions to remain visible in the ambient air beyond the property line of origin.
- 3) Should it be determined that noncompliance has occurred, the Director may require reasonable control measures as may be necessary. These measures may include, but are not limited to, the following:
 - a) Revision of procedures involving construction, repair, cleaning and demolition of buildings and their appurtenances that produce particulate matter emissions;
 - b) Paving or frequent cleaning of roads, driveways and parking lots;
 - c) Application of dust-free surfaces;
 - d) Application of water; and
 - e) Planting and maintenance of vegetative ground cover.

Monitoring:

The permittee shall conduct inspections of its facilities sufficient to determine compliance with this regulation. If the permittee discovers a violation, the permittee shall undertake corrective action to eliminate the violation.

The permittee shall maintain the following monitoring schedule:

- 1) The permittee shall conduct weekly observations for a minimum of eight (8) consecutive weeks after permit issuance.
- 2) Should no violation of this regulation be observed during this period then-
 - a) The permittee may observe once every two (2) weeks for a period of eight (8) weeks.
 - b) If a violation is noted, monitoring reverts to weekly.
 - c) Should no violation of this regulation be observed during this period then-
 - i) The permittee may observe once per month.
 - ii) If a violation is noted, monitoring reverts to weekly.
- 3) If the permittee reverts to weekly monitoring at any time, monitoring frequency will progress in an identical manner to the initial monitoring frequency.

Recordkeeping:

The permittee shall document all readings on Attachment C, or its equivalent, noting the following:

- 1) Whether air emissions (except water vapor) remain visible in the ambient air beyond the property line of origin.
- 2) Whether the visible emissions were normal for the installation.
- 3) Whether equipment malfunctions contributed to an exceedance.
- 4) Any violations and any corrective actions undertaken to correct the violation.

10 CSR 10-6.180 Measurement of Emissions of Air Contaminants

- 1) The Director may require any person responsible for the source of emission of air contaminants to make or have made tests to determine the quantity or nature, or both, of emission of air contaminants from the source. The Director may specify testing methods to be used in accordance with good professional practice. The Director may observe the testing. All tests shall be performed by qualified personnel.
- 2) The Director may conduct tests of emissions of air contaminants from any source. Upon request of the Director, the person responsible for the source to be tested shall provide necessary ports in stacks or ducts and other safe and proper sampling and testing facilities, exclusive of instruments and sensing devices as may be necessary for proper determination of the emission of air contaminants.
- 3) The Director shall be given a copy of the test results in writing and signed by the person responsible for the tests.

10 CSR 10-3.090 Restriction of Emission of Odors

This requirement is not federally enforceable.

No person may cause, permit or allow the emission of odorous matter in concentrations and frequencies or for durations that odor can be perceived when one volume of odorous air is diluted with seven volumes of odor-free air for two separate trials not less than 15 minutes apart within the period of one hour.

10 CSR 10-6.220 Restriction of Emission of Visible Air Contaminants

Emission Limitation:

No owner or other person shall cause or permit to be discharged into the atmosphere from any source any visible emissions in excess of the limits specified by this rule. This permit will contain the opacity limits identified (10, 20 or 40 percent) for the specific emission units.

Monitoring:

- 1) The permittee shall conduct opacity readings on each emission unit using the procedures contained in U.S. EPA Test Method 22. The permittee is only required to take readings when the emission unit is operating and when the weather conditions allow. If the permittee observes no visible or other significant emissions using these procedures, then no further observations are required. For emission units with visible emissions perceived or believed to exceed the applicable opacity standard, the source representative would then conduct a Method 9 observation.
- 2) The permittee must maintain the following monitoring schedule:
 - a) The permittee shall conduct weekly observations for a minimum of eight (8) consecutive weeks after permit issuance.
 - b) Should the permittee observe no violations of this regulation during this period then-
 - i) The permittee may observe once every two (2) weeks for a period of eight (8) weeks.
 - ii) If a violation is noted, monitoring reverts to weekly.
 - iii) Should no violation of this regulation be observed during this period then-
 - (1) The permittee may observe once per month.
 - (2) If a violation is noted, monitoring reverts to weekly.
- 3) If the source reverts to weekly monitoring at any time, monitoring frequency will progress in an identical manner from the initial monitoring frequency.

Recordkeeping:

The permittee shall maintain records of all observation results using Attachment D (or its equivalent), noting:

- 1) Whether any air emissions (except for water vapor) were visible from the emission units;
- 2) All emission units from which visible emissions occurred;
- 3) Whether the visible emissions were normal for the process;
- 4) The permittee shall maintain records using Attachment E (or its equivalent) of any equipment malfunctions, which may contribute to visible emissions; and,
- 5) The permittee shall maintain records using Attachment F (or its equivalent) of all USEPA Method 9 opacity tests performed.

Title VI – 40 CFR Part 82 Protection of Stratospheric Ozone

- 1) The permittee shall comply with the standards for labeling of products using ozone-depleting substances pursuant to 40 CFR Part 82, Subpart E:
 - a) All containers in which a class I or class II substance is stored or transported, all products containing a class I substance, and all products directly manufactured with a class I substance must bear the required warning statement if it is being introduced into interstate commerce pursuant to §82.106.
 - b) The placement of the required warning statement must comply with the requirements pursuant to §82.108.
 - c) The form of the label bearing the required warning statement must comply with the requirements pursuant to §82.110.

- d) No person may modify, remove, or interfere with the required warning statement except as described in §82.112.
- 2) The permittee shall comply with the standards for recycling and emissions reduction pursuant to 40 CFR Part 82, Subpart F, except as provided for motor vehicle air conditioners (MVACs) in Subpart B:
 - a) Persons opening appliances for maintenance, service, repair, or disposal must comply with the required practices pursuant to §82.156.
 - b) Equipment used during the maintenance, service, repair, or disposal of appliances must comply with the standards for recycling and recovery equipment pursuant to §82.158.
 - c) Persons performing maintenance, service, repair, or disposal of appliances must be certified by an approved technician certification program pursuant to §82.161.
 - d) Persons disposing of small appliances, MVACs, and MVAC-like appliances must comply with record keeping requirements pursuant to §82.166. ("MVAC-like" appliance as defined at §82.152).
 - e) Persons owning commercial or industrial process refrigeration equipment must comply with the leak repair requirements pursuant to §82.156.
 - f) Owners/operators of appliances normally containing 50 or more pounds of refrigerant must keep records of refrigerant purchased and added to such appliances pursuant to §82.166.
- 3) If the permittee manufactures, transforms, imports, or exports a class I or class II substance, the permittee is subject to all the requirements as specified in 40 CFR Part 82, Subpart A, Production and Consumption Controls.
- 4) If the permittee performs a service on motor (fleet) vehicles when this service involves ozone-depleting substance refrigerant (or regulated substitute substance) in the motor vehicle air conditioner (MVAC), the permittee is subject to all the applicable requirements as specified in 40 CFR Part 82, Subpart B, Servicing of Motor Vehicle Air conditioners. The term "motor vehicle" as used in Subpart B does not include a vehicle in which final assembly of the vehicle has not been completed. The term "MVAC" as used in Subpart B does not include the air-tight sealed refrigeration system used as refrigerated cargo, or system used on passenger buses using HCFC-22 refrigerant.
- 5) The permittee shall be allowed to switch from any ozone-depleting substance to any alternative that is listed in the Significant New Alternatives Program (SNAP) promulgated pursuant to 40 CFR Part 82, Subpart G, Significant New Alternatives Policy Program. *Federal Only - 40 CFR Part 82*

10 CSR 10-6.280 Compliance Monitoring Usage

- 1) The permittee is not prohibited from using the following in addition to any specified compliance methods for the purpose of submission of compliance certificates:
 - a) Monitoring methods outlined in 40 CFR Part 64;
 - b) Monitoring method(s) approved for the permittee pursuant to 10 CSR 10-6.065, "Operating Permits", and incorporated into an operating permit; and
 - c) Any other monitoring methods approved by the Director.
- 2) Any credible evidence may be used for the purpose of establishing whether a permittee has violated or is in violation of any such plan or other applicable requirement. Information from the use of the following methods is presumptively credible evidence of whether a violation has occurred by a permittee:
 - a) Monitoring methods outlined in 40 CFR Part 64;
 - b) A monitoring method approved for the permittee pursuant to 10 CSR 10-6.065, "Operating Permits", and incorporated into an operating permit; and

- c) Compliance test methods specified in the rule cited as the authority for the emission limitations.
- 3) The following testing, monitoring or information gathering methods are presumptively credible testing, monitoring, or information gathering methods:
 - a) Applicable monitoring or testing methods, cited in:
 - i) 10 CSR 10-6.030, "Sampling Methods for Air Pollution Sources";
 - ii) 10 CSR 10-6.040, "Reference Methods";
 - iii) 10 CSR 10-6.070, "New Source Performance Standards";
 - iv) 10 CSR 10-6.080, "Emission Standards for Hazardous Air Pollutants"; or
 - b) Other testing, monitoring, or information gathering methods, if approved by the Director, that produce information comparable to that produced by any method listed above.

V. General Permit Requirements

The installation shall comply with each of the following requirements. Consult the appropriate sections in the Code of Federal Regulations (CFR) and Code of State Regulations (CSR) for the full text of the applicable requirements. All citations, unless otherwise noted, are to the regulations in effect as of the date that this permit is issued,

10 CSR 10-6.065(6)(C)1.B Permit Duration

This permit is issued for a term of five years, commencing on the date of issuance. This permit will expire at the end of this period unless renewed.

10 CSR 10-6.065(6)(C)1.C General Record Keeping and Reporting Requirements

- 1) Record Keeping
 - a) All required monitoring data and support information shall be retained for a period of at least five years from the date of the monitoring sample, measurement, report or application.
 - b) Copies of all current operating and construction permits issued to this installation shall be kept on-site for as long as the permits are in effect. Copies of these permits shall be made immediately available to any Missouri Department of Natural Resources' personnel upon request.
- 2) Reporting
 - a) All reports shall be submitted to the Air Pollution Control Program's Enforcement Section, P. O. Box 176, Jefferson City, MO 65102.
 - b) The permittee shall submit a report of all required monitoring by:
 - i) October 1st for monitoring which covers the January through June time period, and
 - ii) April 1st for monitoring which covers the July through December time period.
 - iii) Exception. Monitoring requirements which require reporting more frequently than semi annually shall report no later than 30 days after the end of the calendar quarter in which the measurements were taken.
 - c) Each report shall identify any deviations from emission limitations, monitoring, record keeping, reporting, or any other requirements of the permit, this includes deviations or Part 64 exceedances.
 - d) Submit supplemental reports as required or as needed. Supplemental reports are required no later than ten days after any exceedance of any applicable rule, regulation or other restriction. All reports of deviations shall identify the cause or probable cause of the deviations and any corrective actions or preventative measures taken.
 - i) Notice of any deviation resulting from an emergency (or upset) condition as defined in paragraph (6)(C)7.A of 10 CSR 10-6.065 (Emergency Provisions) shall be submitted to the permitting authority either verbally or in writing within two working days after the date on which the emission limitation is exceeded due to the emergency, if the permittee wishes to assert an affirmative defense. The affirmative defense of emergency shall be demonstrated through properly signed, contemporaneous operating logs, or other relevant evidence that indicate an emergency occurred and the permittee can identify the cause(s) of the emergency. The permitted installation must show that it was operated properly at the time and that during the period of the emergency the permittee took all reasonable steps to minimize levels of emissions that exceeded the emission standards or requirements in the permit. The notice must contain a description of the emergency, the steps taken to mitigate emissions, and the corrective actions taken.

- ii) Any deviation that poses an imminent and substantial danger to public health, safety or the environment shall be reported as soon as practicable.
- iii) Any other deviations identified in the permit as requiring more frequent reporting than the permittee's semiannual report shall be reported on the schedule specified in this permit, and no later than ten days after any exceedance of any applicable rule, regulation, or other restriction.
- e) Every report submitted shall be certified by the responsible official, except that, if a report of a deviation must be submitted within ten days after the deviation, the report may be submitted without a certification if the report is resubmitted with an appropriate certification within ten days after that, together with any corrected or supplemental information required concerning the deviation.
- f) The permittee may request confidential treatment of information submitted in any report of deviation.

10 CSR 10-6.065(6)(C)1.D Risk Management Plan Under Section 112(r)

The permittee shall comply with the requirements of 40 CFR Part 68, Accidental Release Prevention Requirements. If the permittee has more than a threshold quantity of a regulated substance in process, as determined by 40 CFR Section 68.115, the permittee shall submit a Risk Management Plan in accordance with 40 CFR Part 68 no later than the latest of the following dates:

- 1) June 21, 1999;
- 2) Three years after the date on which a regulated substance is first listed under 40 CFR Section 68.130; or
- 3) The date on which a regulated substance is first present above a threshold quantity in a process.

10 CSR 10-6.065(6)(C)1.F Severability Clause

In the event of a successful challenge to any part of this permit, all uncontested permit conditions shall continue to be in force. All terms and conditions of this permit remain in effect pending any administrative or judicial challenge to any portion of the permit. If any provision of this permit is invalidated, the permittee shall comply with all other provisions of the permit.

10 CSR 10-6.065(6)(C)1.G General Requirements

- 1) The permittee must comply with all of the terms and conditions of this permit. Any noncompliance with a permit condition constitutes a violation and is grounds for enforcement action, permit termination, permit revocation and re-issuance, permit modification or denial of a permit renewal application.
- 2) The permittee may not use as a defense in an enforcement action that it would have been necessary for the permittee to halt or reduce the permitted activity in order to maintain compliance with the conditions of the permit
- 3) The permit may be modified, revoked, reopened, reissued or terminated for cause. Except as provided for minor permit modifications, the filing of an application or request for a permit modification, revocation and reissuance, or termination, or the filing of a notification of planned changes or anticipated noncompliance, does not stay any permit condition.
- 4) This permit does not convey any property rights of any sort, nor grant any exclusive privilege.
- 5) The permittee shall furnish to the Air Pollution Control Program, upon receipt of a written request and within a reasonable time, any information that the Air Pollution Control Program reasonably may require to determine whether cause exists for modifying, reopening, reissuing or revoking the permit or to determine compliance with the permit. Upon request, the permittee also shall furnish to

the Air Pollution Control Program copies of records required to be kept by the permittee. The permittee may make a claim of confidentiality for any information or records submitted pursuant to 10 CSR 10-6.065(6)(C)1.

10 CSR 10-6.065(6)(C)1.H Incentive Programs Not Requiring Permit Revisions

No permit revision will be required for any installation changes made under any approved economic incentive, marketable permit, emissions trading, or other similar programs or processes provided for in this permit.

10 CSR 10-6.065(6)(C)1.I Reasonably Anticipated Operating Scenarios

None

10 CSR 10-6.065(6)(C)3 Compliance Requirements

- 1) Any document (including reports) required to be submitted under this permit shall contain a certification signed by the responsible official.
- 2) Upon presentation of credentials and other documents as may be required by law, the permittee shall allow authorized officials of the Missouri Department of Natural Resources, or their authorized agents, to perform the following (subject to the installation's right to seek confidential treatment of information submitted to, or obtained by, the Air Pollution Control Program):
 - a) Enter upon the premises where a permitted installation is located or an emissions-related activity is conducted, or where records must be kept under the conditions of this permit;
 - b) Have access to and copy, at reasonable times, any records that must be kept under the conditions of this permit;
 - c) Inspect, at reasonable times and using reasonable safety practices, any facilities, equipment (including monitoring and air pollution control equipment), practices, or operations regulated or required under this permit; and
 - d) As authorized by the Missouri Air Conservation Law, Chapter 643, RSMo or the Act, sample or monitor, at reasonable times, substances or parameters for the purpose of assuring compliance with the terms of this permit, and all applicable requirements as outlined in this permit.
- 3) All progress reports required under an applicable schedule of compliance shall be submitted semiannually (or more frequently if specified in the applicable requirement). These progress reports shall contain the following:
 - a) Dates for achieving the activities, milestones or compliance required in the schedule of compliance, and dates when these activities, milestones or compliance were achieved, and
 - b) An explanation of why any dates in the schedule of compliance were not or will not be met, and any preventative or corrective measures adopted.
- 4) The permittee shall submit an annual certification that it is in compliance with all of the federally enforceable terms and conditions contained in this permit, including emissions limitations, standards, or work practices. These certifications shall be submitted annually by April 1st, unless the applicable requirement specifies more frequent submission. These certifications shall be submitted to EPA Region VII, 901 North 5th Street, Kansas City, KS 66101, as well as the Air Pollution Control Program's Enforcement Section, P.O. Box 176, Jefferson City, MO 65102. All deviations and Part 64 exceedances and excursions must be included in the compliance certifications. The compliance certification shall include the following:
 - a) The identification of each term or condition of the permit that is the basis of the certification;
 - b) The current compliance status, as shown by monitoring data and other information reasonably available to the installation;

- c) Whether compliance was continuous or intermittent;
- d) The method(s) used for determining the compliance status of the installation, both currently and over the reporting period; and
- e) Such other facts as the Air Pollution Control Program will require in order to determine the compliance status of this installation.

10 CSR 10-6.065(6)(C)6 Permit Shield

- 1) Compliance with the conditions of this permit shall be deemed compliance with all applicable requirements as of the date that this permit is issued, provided that:
 - a) The application requirements are included and specifically identified in this permit, or
 - b) The permitting authority, in acting on the permit revision or permit application, determines in writing that other requirements, as specifically identified in the permit, are not applicable to the installation, and this permit expressly includes that determination or a concise summary of it.
- 2) Be aware that there are exceptions to this permit protection. The permit shield does not affect the following:
 - a) The provisions of Section 303 of the Act or Section 643.090, RSMo concerning emergency orders,
 - b) Liability for any violation of an applicable requirement which occurred prior to, or was existing at, the time of permit issuance,
 - c) The applicable requirements of the acid rain program,
 - d) The authority of the Environmental Protection Agency and the Air Pollution Control Program of the Missouri Department of Natural Resources to obtain information, or
 - e) Any other permit or extra-permit provisions, terms or conditions expressly excluded from the permit shield provisions.

10 CSR 10-6.065(6)(C)7 Emergency Provisions

- 1) An emergency or upset as defined in 10 CSR 10-6.065(6)(C)7.A shall constitute an affirmative defense to an enforcement action brought for noncompliance with technology-based emissions limitations. To establish an emergency- or upset-based defense, the permittee must demonstrate, through properly signed, contemporaneous operating logs or other relevant evidence, the following:
 - a) That an emergency or upset occurred and that the permittee can identify the source of the emergency or upset,
 - b) That the installation was being operated properly,
 - c) That the permittee took all reasonable steps to minimize emissions that exceeded technology-based emissions limitations or requirements in this permit, and
 - d) That the permittee submitted notice of the emergency to the Air Pollution Control Program within two working days of the time when emission limitations were exceeded due to the emergency. This notice must contain a description of the emergency, any steps taken to mitigate emissions, and any corrective actions taken.
- 2) Be aware that an emergency or upset shall not include noncompliance caused by improperly designed equipment, lack of preventative maintenance, careless or improper operation, or operator error.

10 CSR 10-6.065(6)(C)8 Operational Flexibility

An installation that has been issued a Part 70 operating permit is not required to apply for or obtain a permit revision in order to make any of the changes to the permitted installation described below if the changes are not Title I modifications, the changes do not cause emissions to exceed emissions allowable

under the permit, and the changes do not result in the emission of any air contaminant not previously emitted. The permittee shall notify the Air Pollution Control Program's Enforcement Section, P.O. Box 176, Jefferson City, MO 65102, as well as EPA Region VII, 901 North 5th Street, Kansas City, KS 66101, at least seven days in advance of these changes, except as allowed for emergency or upset conditions. Emissions allowable under the permit means a federally enforceable permit term or condition determined at issuance to be required by an applicable requirement that establishes an emissions limit (including a work practice standard) or a federally enforceable emissions cap that the source has assumed to avoid an applicable requirement to which the source would otherwise be subject.

- 1) Section 502(b)(10) changes. Changes that, under Section 502(b)(10) of the Act, contravene an express permit term may be made without a permit revision, except for changes that would violate applicable requirements of the Act or contravene federally enforceable monitoring (including test methods), record keeping, reporting or compliance requirements of the permit.
 - a) Before making a change under this provision, The permittee shall provide advance written notice to the Air Pollution Control Program's Enforcement Section, P.O. Box 176, Jefferson City, MO 65102, as well as EPA Region VII, 901 North 5th Street, Kansas City, KS 66101, describing the changes to be made, the date on which the change will occur, and any changes in emission and any permit terms and conditions that are affected. The permittee shall maintain a copy of the notice with the permit, and the Air Pollution Control Program shall place a copy with the permit in the public file. Written notice shall be provided to the EPA and the Air Pollution Control Program as above at least seven days before the change is to be made. If less than seven days notice is provided because of a need to respond more quickly to these unanticipated conditions, the permittee shall provide notice to the EPA and the Air Pollution Control Program as soon as possible after learning of the need to make the change.
 - b) The permit shield shall not apply to these changes.

10 CSR 10-6.065(6)(C)9 Off-Permit Changes

- 1) Except as noted below, the permittee may make any change in its permitted operations, activities or emissions that is not addressed in, constrained by or prohibited by this permit without obtaining a permit revision. Insignificant activities listed in the application, but not otherwise addressed in or prohibited by this permit, shall not be considered to be constrained by this permit for purposes of the off-permit provisions of this section. Off-permit changes shall be subject to the following requirements and restrictions:
 - a) The change must meet all applicable requirements of the Act and may not violate any existing permit term or condition; the permittee may not change a permitted installation without a permit revision if this change is subject to any requirements under Title IV of the Act or is a Title I modification;
 - b) The permittee must provide written notice of the change to the Air Pollution Control Program's Enforcement Section, P.O. Box 176, Jefferson City, MO 65102, as well as EPA Region VII, 901 North 5th Street, Kansas City, KS 66101, no later than the next annual emissions report. This notice shall not be required for changes that are insignificant activities under 10 CSR 10-6.065(6)(B)3. This written notice shall describe each change, including the date, any change in emissions, pollutants emitted and any applicable requirement that would apply as a result of the change.
 - c) The permittee shall keep a record describing all changes made at the installation that result in emissions of a regulated air pollutant subject to an applicable requirement and the emissions resulting from these changes; and

- d) The permit shield shall not apply to these changes.

10 CSR 10-6.020(2)(R)12 Responsible Official

The application utilized in the preparation of this permit was signed by Renzo Bulgarelli. On April 15, 2009, the Air Pollution Control Program was informed that Bill Snow, General Manager, is now the responsible official. If this person terminates employment, or is reassigned different duties such that a different person becomes the responsible person to represent and bind the installation in environmental permitting affairs, the owner or operator of this air contaminant source shall notify the Director of the Air Pollution Control Program of the change. Said notification shall be in writing and shall be submitted within 30 days of the change. The notification shall include the name and title of the new person assigned by the source owner or operator to represent and bind the installation in environmental permitting affairs. All representations, agreement to terms and conditions and covenants made by the former responsible person that were used in the establishment of limiting permit conditions on this permit will continue to be binding on the installation until such time that a revision to this permit is obtained that would change said representations, agreements and covenants.

10 CSR 10-6.065(6)(E)6 Reopening-Permit for Cause

This permit may be reopened for cause if:

- 1) The Missouri Department of Natural Resources (MDNR) receives notice from the Environmental Protection Agency (EPA) that a petition for disapproval of a permit pursuant to 40 CFR § 70.8(d) has been granted, provided that the reopening may be stayed pending judicial review of that determination,
- 2) The Missouri Department of Natural Resources or EPA determines that the permit contains a material mistake or that inaccurate statements were made which resulted in establishing the emissions limitation standards or other terms of the permit,
- 3) Additional applicable requirements under the Act become applicable to the installation; however, reopening on this ground is not required if—:
 - a) The permit has a remaining term of less than three years;
 - b) The effective date of the requirement is later than the date on which the permit is due to expire;or
 - c) The additional applicable requirements are implemented in a general permit that is applicable to the installation and the installation receives authorization for coverage under that general permit,
- 4) The installation is an affected source under the acid rain program and additional requirements (including excess emissions requirements), become applicable to that source, provided that, upon approval by EPA, excess emissions offset plans shall be deemed to be incorporated into the permit; or
- 5) The Missouri Department of Natural Resources or EPA determines that the permit must be reopened and revised to assure compliance with applicable requirements.

10 CSR 10-6.065(6)(E)1.C Statement of Basis

This permit is accompanied by a statement setting forth the legal and factual basis for the permit conditions (including references to applicable statutory or regulatory provisions). This Statement of Basis, while referenced by the permit, is not an actual part of the permit.

VI. Attachments

Attachments follow.

Attachment A

40 CFR Part 63 Subpart JJ, *National Emission Standards for Wood Furniture Manufacturing Operations*

Source: 60 FR 62936, Dec. 7, 1995, unless otherwise noted.

§ 63.800 Applicability.

- (a) The affected source to which this subpart applies is each facility that is engaged, either in part or in whole, in the manufacture of wood furniture or wood furniture components and that is located at a plant site that is a major source as defined in 40 CFR Part 63, subpart A, §63.2. The owner or operator of a source that meets the definition for an incidental wood furniture manufacturer shall maintain purchase or usage records demonstrating that the source meets the definition in §63.801 of this subpart, but the source shall not be subject to any other provisions of this subpart.
- (b) A source that complies with the limits and criteria specified in paragraphs (b)(1), (b)(2), or (b)(3) of this section is an area source for the purposes of this subpart and is not subject to any other provision of this rule, provided that: In the case of paragraphs (b)(1) and (b)(2), finishing materials, adhesives, cleaning solvents and washoff solvents used for wood furniture or wood furniture component manufacturing operations account for at least 90 percent of annual HAP emissions at the plant site, and if the plant site has HAP emissions that do not originate from the listed materials, the owner or operator shall keep any records necessary to demonstrate that the 90 percent criterion is being met. A source that initially relies on the limits and criteria specified in paragraphs (b)(1), (b)(2), and (b)(3) to become an area source, but subsequently exceeds the relevant limit (without first obtaining and complying with other limits that keep its potential to emit hazardous air pollutants below major source levels), becomes a major source and must comply thereafter with all applicable provisions of this subpart starting on the applicable compliance date in §63.800. Nothing in this paragraph (b) is intended to preclude a source from limiting its potential to emit through other appropriate mechanisms that may be available through the permitting authority.
- (1) The owner or operator of the source uses no more than 250 gallons per month, for every month, of coating, gluing, cleaning, and washoff materials at the source, including materials used for source categories other than wood furniture (surface coating), but excluding materials used in routine janitorial or facility grounds maintenance, personal uses by employees or other persons, the use of products for the purpose of maintaining motor vehicles operated by the facility, or the use of toxic chemicals contained in intake water (used for processing or noncontact cooling) or intake air (used either as compressed air or for combustion). The owner or operator shall maintain records of the total gallons of coating, gluing, cleaning, and washoff materials used each month, and upon request submit such records to the Administrator. These records shall be maintained for five years.
- (2) The owner or operator of the source uses no more than 3,000 gallons per rolling 12-month period, for every 12-month period, of coating, gluing, cleaning, and washoff materials at the source, including materials used for source categories other than wood furniture (surface coating), but excluding materials used in routine janitorial or facility grounds maintenance, personal uses by employees or other persons, the use of products for the purpose of maintaining motor vehicles operated by the facility, or the use of toxic chemicals contained in intake water (used for processing or noncontact cooling) or intake air (used either as compressed air or for combustion). A rolling 12-month period includes the previous 12 months of operation. The owner or operator of the source shall maintain records of the total gallons of coating, gluing,

cleaning, and washoff materials used each month and the total gallons used each previous month, and upon request submit such records to the Administrator. Because records are needed over the previous set of 12 months, the owner or operator shall keep monthly records beginning no less than one year before the compliance date specified in §63.800(e). Records shall be maintained for five years.

- (3) The source emits no more than 4.5 Mg (5 tons) of any one HAP per rolling 12-month period and no more than 11.4 Mg (12.5 tons) of any combination of HAP per rolling 12-month period, and at least 90 percent of the plantwide emissions per rolling 12-month period are associated with the manufacture of wood furniture or wood furniture components.
- (c) This subpart does not apply to research or laboratory facilities as defined in §63.801.
- (d) Owners or operators of affected sources shall also comply with the requirements of subpart A of this part (General Provisions), according to the applicability of subpart A to such sources, as identified in Table 1 of this subpart.
- (e) The compliance date for existing affected sources that emit less than 50 tons per year of HAP in 1996 is December 7, 1998. The compliance date for existing affected sources that emit 50 tons or more of hazardous air pollutants in 1996 is November 21, 1997. The owner or operator of an existing area source that increases its emissions of (or its potential to emit) HAP such that the source becomes a major source that is subject to this subpart shall comply with this subpart one year after becoming a major source.
- (f) New affected sources must comply with the provisions of this standard immediately upon startup or by December 7, 1995, whichever is later. New area sources that become major sources shall comply with the provisions of this standard immediately upon becoming a major source.
- (g) Reconstructed affected sources are subject to the requirements for new affected sources. The costs associated with the purchase and installation of air pollution control equipment (e.g., incinerators, carbon adsorbers, etc.) are not considered in determining whether the facility has been reconstructed, unless the control equipment is required as part of the process (e.g., product recovery). Additionally, the costs of retrofitting and replacement of equipment that is installed specifically to comply with this subpart are not considered reconstruction costs. For example, an affected source may convert to waterborne coatings to meet the requirements of this subpart. At most facilities, this conversion will require the replacement of existing storage tanks, mix equipment, and transfer lines. The cost of replacing the equipment is not considered in determining whether the facility has been reconstructed.

[60 FR 62936, Dec. 7, 1995, as amended at 62 FR 30259, June 3, 1997]

§ 63.801 Definitions.

- (a) All terms used in this subpart that are not defined below have the meaning given to them in the CAA and in subpart A (General Provisions) of this part.

Adhesive means any chemical substance that is applied for the purpose of bonding two surfaces together other than by mechanical means. Under this subpart, adhesives shall not be considered coatings or finishing materials. Products used on humans and animals, adhesive tape, contact paper, or any other product with an adhesive incorporated onto or in an inert substrate shall not be considered adhesives under this subpart.

Administrator means the Administrator of the United States Environmental Protection Agency or his or her authorized representative.

Aerosol adhesive means an adhesive that is dispensed from a pressurized container as a suspension of fine solid or liquid particles in gas.

Affected source means a wood furniture manufacturing facility that is engaged, either in part or in whole, in the manufacture of wood furniture or wood furniture components and that is located at a plant site that is a major source as defined in 40 CFR Part 63.2, excluding sources that meet the criteria established in §63.800(a), (b) and (c) of this subpart.

Alternative method means any method of sampling and analyzing for an air pollutant that is not a reference or equivalent method but has been demonstrated to the Administrator's satisfaction to, in specific cases, produce results adequate for a determination of compliance.

As applied means the HAP and solids content of the coating or contact adhesive that is actually used for coating or gluing the substrate. It includes the contribution of materials used for in-house dilution of the coating or contact adhesive.

Basecoat means a coat of colored material, usually opaque, that is applied before graining inks, glazing coats, or other opaque finishing materials, and is usually topcoated for protection.

Baseline conditions means the conditions that exist prior to an affected source implementing controls, such as a control system.

Building enclosure means a building housing a process that meets the requirements of a temporary total enclosure. The EPA Method 204E is used to identify all emission points from the building enclosure and to determine which emission points must be tested. For additional information see *Guidelines for Determining Capture Efficiency*, January 1994. Docket No. A-93-10, Item No. IV-B-1.

Capture device means a hood, enclosed room, floor sweep, or other means of collecting solvent emissions or other pollutants into a duct so that the pollutant can be directed to a pollution control device such as an incinerator or carbon adsorber.

Capture efficiency means the fraction of all organic vapors generated by a process that are directed to a control device.

Certified product data sheet (CPDS) means documentation furnished by coating or adhesive suppliers or an outside laboratory that provides:

- (1) The VHAP content of a finishing material, contact adhesive, or solvent, by percent weight, measured using the EPA Method 311 (as promulgated in this subpart), or an equivalent or alternative method (or formulation data if the coating meets the criteria specified in §63.805(a));
- (2) The solids content of a finishing material or contact adhesive by percent weight, determined using data from the EPA Method 24, or an alternative or equivalent method (or formulation data if the coating meets the criteria specified in §63.805 (a)); and
- (3) The density, measured by EPA Method 24 or an alternative or equivalent method. Therefore, the reportable VHAP content shall represent the maximum aggregate emissions potential of the finishing material, adhesive, or solvent in concentrations greater than or equal to 1.0 percent by weight or 0.1 percent for VHAP that are carcinogens, as defined by the Occupational Safety and Health Administration Hazard Communication Standard (29 CFR Part 1910), as formulated. Only VHAP present in concentrations greater than or equal to 1.0 percent by weight, or 0.1 percent for VHAP that are carcinogens, must be reported on the CPDS. The

purpose of the CPDS is to assist the affected source in demonstrating compliance with the emission limitations presented in §63.802.

Note: Because the optimum analytical conditions under EPA Method 311 vary by coating, the coating or adhesive supplier may also choose to include on the CPDS the optimum analytical conditions for analysis of the coating, adhesive, or solvent using EPA Method 311. Such information may include, but not be limited to, separation column, oven temperature, carrier gas, injection port temperature, extraction solvent, and internal standard.)

Cleaning operations means operations in which organic HAP solvent is used to remove coating materials or adhesives from equipment used in wood furniture manufacturing operations.

Coating means a protective, decorative, or functional film applied in a thin layer to a surface. Such materials include, but are not limited to, paints, topcoats, varnishes, sealers, stains, washcoats, basecoats, enamels, inks, and temporary protective coatings. Aerosol spray paints used for touch-up and repair are not considered coatings under this subpart.

Coating application station means the part of a coating operation where the coating is applied, e.g., a spray booth.

Coating operation means those activities in which a coating is applied to a substrate and is subsequently air-dried, cured in an oven, or cured by radiation.

Coating solids (or solids) means the part of the coating which remains after the coating is dried or cured; solids content is determined using data from the EPA Method 24, or an equivalent or alternative method.

Compliant coating/contact adhesive means a finishing material, contact adhesive, or strippable booth coating that meets the emission limits specified in Table 3 of this subpart.

Contact adhesive means an adhesive that is applied to two substrates, dried, and mated under only enough pressure to result in good contact. The bond is immediate and sufficiently strong to hold pieces together without further clamping, pressure, or airing.

Continuous coater means a finishing system that continuously applies finishing materials onto furniture parts moving along a conveyor. Finishing materials that are not transferred to the part are recycled to a reservoir. Several types of application methods can be used with a continuous coater including spraying, curtain coating, roll coating, dip coating, and flow coating.

Continuous compliance means that the affected source is meeting the emission limitations and other requirements of the rule at all times and is fulfilling all monitoring and recordkeeping provisions of the rule in order to demonstrate compliance.

Control device means any equipment that reduces the quantity of a pollutant that is emitted to the air. The device may destroy or secure the pollutant for subsequent recovery. Includes, but is not limited to, incinerators, carbon adsorbers, and condensers.

Control device efficiency means the ratio of the pollutant released by a control device and the pollutant introduced to the control device.

Control system means the combination of capture and control devices used to reduce emissions to the atmosphere.

Conventional air spray means a spray coating method in which the coating is atomized by mixing it with compressed air and applied at an air pressure greater than 10 pounds per square inch (gauge) at the point of atomization. Airless and air assisted airless spray technologies are not conventional air spray because the coating is not atomized by mixing it with compressed air. Electrostatic spray technology is also not considered conventional air spray because an electrostatic charge is employed to attract the coating to the workpiece.

Data quality objective (DQO) approach means a set of approval criteria that must be met so that data from an alternative test method can be used in determining the capture efficiency of a control system. For additional information, see *Guidelines for Determining Capture Efficiency*, January 1994. (Docket No. A-93-10, Item No. IV-B-1).

Day means a period of 24 consecutive hours beginning at midnight local time, or beginning at a time consistent with a facility's operating schedule.

Disposed offsite means sending used organic HAP solvent or coatings outside of the facility boundaries for disposal.

Emission means the release or discharge, whether directly or indirectly, of HAP into the ambient air.

Enamel means a coat of colored material, usually opaque, that is applied as a protective topcoat over a basecoat, primer, or previously applied enamel coats. In some cases, another finishing material may be applied as a topcoat over the enamel.

Equipment leak means emissions of VHAP from pumps, valves, flanges, or other equipment used to transfer or apply coatings, adhesives, or organic HAP solvents.

Equivalent method means any method of sampling and analyzing for an air pollutant that has been demonstrated to the Administrator's satisfaction to have a consistent and quantitatively known relationship to the reference method, under specific conditions.

Finishing material means a coating used in the wood furniture industry. Such materials include, but are not limited to, stains, basecoats, washcoats, enamels, sealers, and topcoats.

Finishing operation means those operations in which a finishing material is applied to a substrate and is subsequently air-dried, cured in an oven, or cured by radiation.

Foam adhesive means a contact adhesive used for gluing foam to fabric, foam to foam, and fabric to wood.

Gluing operation means those operations in which adhesives are used to join components, for example, to apply a laminate to a wood substrate or foam to fabric.

Incidental wood furniture manufacturer means a major source that is primarily engaged in the manufacture of products other than wood furniture or wood furniture components and that uses no more than 100 gallons per month of finishing material or adhesives in the manufacture of wood furniture or wood furniture components.

Incinerator means, for the purposes of this industry, an enclosed combustion device that thermally oxidizes volatile organic compounds to CO and CO₂. This term does not include devices that burn municipal or hazardous waste material.

Janitorial maintenance means the upkeep of equipment or building structures that is not directly related to the manufacturing process, for example, cleaning of restroom facilities.

Lower confidence limit (LCL) approach means a set of approval criteria that must be met so that data from an alternative test method can be used in determining the capture efficiency of a control system. For additional information, see *Guidelines for Determining Capture Efficiency*, January 1994. (Docket No. A-93-10, Item No. IV-B-1).

Material safety data sheet (MSDS) means the documentation required for hazardous chemicals by the Occupational Safety and Health Administration (OSHA) Hazard Communication Standard (29 CFR Part 1910) for a solvent, cleaning material, contact adhesive, coating, or other material that identifies select reportable hazardous ingredients of the material, safety and health considerations, and handling procedures.

Noncompliant coating/contact adhesive means a finishing material, contact adhesive, or strippable booth coating that has a VHAP content (VOC content for the strippable booth coating) greater than the emission limitation presented in Table 3 of this subpart.

Nonporous substrate means a surface that is impermeable to liquids. Examples include metal, rigid plastic, flexible vinyl, and rubber.

Normally closed container means a container that is closed unless an operator is actively engaged in activities such as emptying or filling the container.

Operating parameter value means a minimum or maximum value established for a control device or process parameter that, if achieved by itself or in combination with one or more other operating parameter values, determines that an owner or operator has complied with an applicable emission limit.

Organic HAP solvent means a HAP that is a volatile organic liquid used for dissolving or dispersing constituents in a coating or contact adhesive, adjusting the viscosity of a coating or contact adhesive, or cleaning equipment. When used in a coating or contact adhesive, the organic HAP solvent evaporates during drying and does not become a part of the dried film.

Overall control efficiency means the efficiency of a control system, calculated as the product of the capture and control device efficiencies, expressed as a percentage.

Permanent total enclosure means a permanently installed enclosure that completely surrounds a source of emissions such that all emissions are captured and contained for discharge through a control device. For additional information, see *Guidelines for Determining Capture Efficiency*, January 1994. (Docket No. A-93-10, Item No. IV-B-1).

Recycled onsite means the reuse of an organic HAP solvent in a process other than cleaning or washoff.

Reference method means any method of sampling and analyzing for an air pollutant that is published in appendix A of 40 CFR Part 60.

Research or laboratory facility means any stationary source whose primary purpose is to conduct research and development to develop new processes and products where such source is operated under the close supervision of technically trained personnel and is not engaged in the manufacture of products for commercial sale in commerce, except in a de minimis manner.

Responsible official has the meaning given to it in 40 CFR Part 70, State Operating Permit Programs (Title V permits).

Sealer means a finishing material used to seal the pores of a wood substrate before additional coats of finishing material are applied. Special purpose finishing materials that are used in some finishing systems to optimize aesthetics are not sealers.

Solvent means a liquid used in a coating or contact adhesive to dissolve or disperse constituents and/or to adjust viscosity. It evaporates during drying and does not become a part of the dried film.

Stain means any color coat having a solids content by weight of no more than 8.0 percent that is applied in single or multiple coats directly to the substrate. It includes, but is not limited to, nongrain raising stains, equalizer stains, prestains, sap stains, body stains, no-wipe stains, penetrating stains, and toners.

Storage containers means vessels or tanks, including mix equipment, used to hold finishing, gluing, cleaning, or washoff materials.

Strippable spray booth material means a coating that:

- (1) Is applied to a spray booth wall to provide a protective film to receive over spray during finishing operations;
- (2) That is subsequently peeled off and disposed; and
- (3) By achieving (1) and (2) of this definition reduces or eliminates the need to use organic HAP solvents to clean spray booth walls.

Substrate means the surface onto which a coating or contact adhesive is applied (or into which a coating or contact adhesive is impregnated).

Temporary total enclosure means an enclosure that meets the requirements of §63.805(e)(1) (i) through (iv) and is not permanent, but constructed only to measure the capture efficiency of pollutants emitted from a given source. Additionally, any exhaust point from the enclosure shall be at least four equivalent duct or hood diameters from each natural draft opening. For additional information, see *Guidelines for Determining Capture Efficiency*, January 1994. (Docket No. A-93-10, Item No. IV-B-1).

Thinner means a volatile liquid that is used to dilute coatings or contact adhesives (to reduce viscosity, color strength, and solids, or to modify drying conditions).

Topcoat means the last film-building finishing material that is applied in a finishing system.

Touchup and repair means the application of finishing materials to cover minor finishing imperfections.

VHAP means any volatile hazardous air pollutant listed in Table 2 to Subpart JJ.

VHAP of potential concern means any VHAP from the list in table 6 of this subpart.

Volatile organic compound (VOC) means any organic compound which participates in atmospheric photochemical reactions, that is, any organic compound other than those which the Administrator designates as having negligible photochemical reactivity. A VOC may be measured by a reference method, an equivalent method, an alternative method, or by procedures specified under any rule. A reference method, an equivalent method, or an alternative method, however, may also measure nonreactive organic compounds. In such cases, the owner or operator may exclude the nonreactive

organic compounds when determining compliance with a standard. For a list of compounds that the Administrator has designated as having negligible photochemical reactivity, refer to 40 CFR Part 51.10.

Washcoat means a transparent special purpose finishing material having a solids content by weight of 12.0 percent by weight or less. Washcoats are applied over initial stains to protect, to control color, and to stiffen the wood fibers in order to aid sanding.

Washoff operations means those operations in which organic HAP solvent is used to remove coating from wood furniture or a wood furniture component.

Wood furniture means any product made of wood, a wood product such as rattan or wicker, or an engineered wood product such as particleboard that is manufactured under any of the following standard industrial classification codes: 2434, 2511, 2512, 2517, 2519, 2521, 2531, 2541, 2599, or 5712.

Wood furniture component means any part that is used in the manufacture of wood furniture. Examples include, but are not limited to, drawer sides, cabinet doors, seat cushions, and laminated tops. However, foam seat cushions manufactured and fabricated at a facility that does not engage in any other wood furniture or wood furniture component manufacturing operation are excluded from this definition.

Wood furniture manufacturing operations means the finishing, gluing, cleaning, and washoff operations associated with the production of wood furniture or wood furniture components.

(b) The nomenclature used in this subpart has the following meaning:

- (1) A_k = the area of each natural draft opening (k) in a total enclosure, in square meters.
- (2) C_c = the VHAP content of a finishing material (c), in kilograms of volatile hazardous air pollutants per kilogram of coating solids (kg VHAP/kg solids), as supplied. Also given in pounds of volatile hazardous air pollutants per pound of coating solids (lb VHAP/lb solids).
- (3) C_{aj} = the concentration of VHAP in gas stream (j) exiting the control device, in parts per million by volume.
- (4) C_{bi} = the concentration of VHAP in gas stream (i) entering the control device, in parts per million by volume.
- (5) C_{di} = the concentration of VHAP in gas stream (i) entering the control device from the affected source, in parts per million by volume.
- (6) C_{fk} = the concentration of VHAP in uncontrolled gas stream (k) emitted directly to the atmosphere from the affected source, in parts per million by volume.
- (7) E = the emission limit achieved by an emission point or a set of emission points, in kg VHAP/kg solids (lb VHAP/lb solids).
- (8) F = the control device efficiency, expressed as a fraction.
- (9) FV = the average inward face velocity across all natural draft openings in a total enclosure, in meters per hour.
- (10) G = the VHAP content of a contact adhesive, in kg VHAP/kg solids (lb VHAP/lb solids), as applied.
- (11) M = the mass of solids in finishing material used monthly, kg solids/month (lb solids/month).

- (12) N =the capture efficiency, expressed as a fraction.
- (13) Q_{aj} =the volumetric flow rate of gas stream (j) exiting the control device, in dry standard cubic meters per hour.
- (14) Q_{bi} =the volumetric flow rate of gas stream (i) entering the control device, in dry standard cubic meters per hour.
- (15) Q_{di} =the volumetric flow rate of gas stream (i) entering the control device from the emission point, in dry standard cubic meters per hour.
- (16) Q_{fk} =the volumetric flow rate of uncontrolled gas stream (k) emitted directly to the atmosphere from the emission point, in dry standard cubic meters per hour.
- (17) Q_{ini} =the volumetric flow rate of gas stream (i) entering the total enclosure through a forced makeup air duct, in standard cubic meters per hour (wet basis).
- (18) Q_{outj} =the volumetric flow rate of gas stream (j) exiting the total enclosure through an exhaust duct or hood, in standard cubic meters per hour (wet basis).
- (19) R =the overall efficiency of the control system, expressed as a percentage.
- (20) S =the VHAP content of a solvent, expressed as a weight fraction, added to finishing materials.
- (21) W =the amount of solvent, in kilograms (pounds), added to finishing materials during the monthly averaging period.
- (22) ac =after the control system is installed and operated.
- (23) bc =before control.

[60 FR 62936, Dec. 7, 1995, as amended at 62 FR 30260, June 3, 1997; 62 FR 31363, June 9, 1997; 63 FR 71380, Dec. 28, 1998]

§ 63.802 Emission limits.

- (a) Each owner or operator of an existing affected source subject to this subpart shall:
 - (1) Limit VHAP emissions from finishing operations by meeting the emission limitations for existing sources presented in Table 3 of this subpart, using any of the compliance methods in §63.804(a). To determine VHAP emissions from a finishing material containing formaldehyde or styrene, the owner or operator of the affected source shall use the methods presented in §63.803(1)(2) for determining styrene and formaldehyde usage.
 - (2) Limit VHAP emissions from contact adhesives by achieving a VHAP limit for contact adhesives based on the following criteria:
 - (i) For foam adhesives (contact adhesives used for upholstery operations) used in products that meet the upholstered seating flammability requirements of California Technical Bulletin 116, 117, or 133, the Business and Institutional Furniture Manufacturers Association's (BIFMA's) X5.7, UFAC flammability testing, or any similar requirements from local, State, or Federal fire regulatory agencies, the VHAP content of the adhesive shall not exceed 1.8 kg VHAP/kg solids (1.8 lb VHAP/lb solids), as applied; or
 - (ii) For all other contact adhesives (including foam adhesives used in products that do not meet the standards presented in paragraph (a)(2)(i) of this section, but excluding aerosol adhesives and excluding contact adhesives applied to nonporous substrates, the VHAP

content of the adhesive shall not exceed 1.0 kg VHAP/kg solids (1.0 lb VHAP/lb solids), as applied.

- (3) Limit HAP emissions from strippable spray booth coatings by using coatings that contain no more than 0.8 kg VOC/kg solids (0.8 lb VOC/lb solids), as applied.

(b) Each owner or operator of a new affected source subject to this subpart shall:

- (1) Limit VHAP emissions from finishing operations by meeting the emission limitations for new sources presented in Table 3 of this subpart using any of the compliance methods in §63.804(d). To determine VHAP emissions from a finishing material containing formaldehyde or styrene, the owner or operator of the affected source shall use the methods presented in §63.803(1)(2) for determining styrene and formaldehyde usage.
- (2) Limit VHAP emissions from contact adhesives by achieving a VHAP limit for contact adhesives, excluding aerosol adhesives and excluding contact adhesives applied to nonporous substrates, of no greater than 0.2 kg VHAP/kg solids (0.2 lb VHAP/lb solids), as applied, using either of the compliance methods in §63.804(e).
- (3) Limit HAP emissions from strippable spray booth coatings by using coatings that contain no more than 0.8 kg VOC/kg solids (0.8 lb VOC/lb solids), as applied.

§ 63.803 Work practice standards.

(a) *Work practice implementation plan.*

- (1) Each owner or operator of an affected source subject to this subpart shall prepare and maintain a written work practice implementation plan that defines environmentally desirable work practices for each wood furniture operation manufacturing operation and addresses each of the work practice standards presented in paragraphs (b) through (l) of this section. The plan shall be developed no more than 60 days after the compliance date.
- (2) The written work practice implementation plan shall be available for inspection by the Administrator (or delegated State, local, or Tribal authority) upon request. If the Administrator (or delegated State, local, or Tribal authority) determines that the work practice implementation plan does not include sufficient mechanisms for ensuring that the work practice standards are being implemented, the Administrator (or delegated State, local, or Tribal authority) may require the affected source to modify the plan. Revisions or modifications to the plan do not require a revision of the source's Title V permit.
- (3) The inspection and maintenance plan required by paragraph (c) of this section and the formulation assessment plan for finishing operations required by paragraph (l) of this section are also reviewable by the Administrator (or delegated State, local, or Tribal authority).

(b) *Operator training course.* Each owner or operator of an affected source shall train all new and existing personnel, including contract personnel, who are involved in finishing, gluing, cleaning, and washoff operations, use of manufacturing equipment, or implementation of the requirements of this subpart. All new personnel, those hired after the compliance date of the standard, shall be trained upon hiring. All existing personnel, those hired before the compliance date of the standard, shall be trained within six months of the compliance date of the standard. All personnel shall be given refresher training annually. The affected source shall maintain a copy of the training program with the work practice implementation plan. The training program shall include, at a minimum, the following:

- (1) A list of all current personnel by name and job description that are required to be trained;
 - (2) An outline of the subjects to be covered in the initial and refresher training for each position or group of personnel;
 - (3) Lesson plans for courses to be given at the initial and the annual refresher training that include, at a minimum, appropriate application techniques, appropriate cleaning and washoff procedures, appropriate equipment setup and adjustment to minimize finishing material usage and overspray, and appropriate management of cleanup wastes; and
 - (4) A description of the methods to be used at the completion of initial or refresher training to demonstrate and document successful completion.
- (c) *Inspection and maintenance plan.* Each owner or operator of an affected source shall prepare and maintain with the work practice implementation plan a written leak inspection and maintenance plan that specifies:
- (1) A minimum visual inspection frequency of once per month for all equipment used to transfer or apply coatings, adhesives, or organic HAP solvents;
 - (2) An inspection schedule;
 - (3) Methods for documenting the date and results of each inspection and any repairs that were made;
 - (4) The timeframe between identifying the leak and making the repair, which adheres, at a minimum, to the following schedule:
 - (i) A first attempt at repair (e.g., tightening of packing glands) shall be made no later than five calendar days after the leak is detected; and
 - (ii) Final repairs shall be made within 15 calendar days after the leak is detected, unless the leaking equipment is to be replaced by a new purchase, in which case repairs shall be completed within three months.
- (d) *Cleaning and washoff solvent accounting system.* Each owner or operator of an affected source shall develop an organic HAP solvent accounting form to record:
- (1) The quantity and type of organic HAP solvent used each month for washoff and cleaning, as defined in §63.801 of this subpart;
 - (2) The number of pieces washed off, and the reason for the washoff; and
 - (3) The quantity of spent organic HAP solvent generated from each washoff and cleaning operation each month, and whether it is recycled onsite or disposed offsite.
- (e) *Chemical composition of cleaning and washoff solvents.* Each owner or operator of an affected source shall not use cleaning or washoff solvents that contain any of the pollutants listed in Table 4 to this subpart, in concentrations subject to MSDS reporting as required by OSHA.
- (f) *Spray booth cleaning.* Each owner or operator of an affected source shall not use compounds containing more than 8.0 percent by weight of VOC for cleaning spray booth components other than conveyors, continuous coaters and their enclosures, or metal filters, or plastic filters unless the spray booth is being refurbished. If the spray booth is being refurbished, that is the spray booth coating or other protective material used to cover the booth is being replaced, the affected source shall use no

more than 1.0 gallon of organic HAP solvent per booth to prepare the surface of the booth prior to applying the booth coating.

- (g) *Storage requirements.* Each owner or operator of an affected source shall use normally closed containers for storing finishing, gluing, cleaning, and washoff materials.
- (h) *Application equipment requirements.* Each owner or operator of an affected source shall use conventional air spray guns to apply finishing materials only under any of the following circumstances:
- (1) To apply finishing materials that have a VOC content no greater than 1.0 lb VOC/lb solids, as applied;
 - (2) For touchup and repair under the following conditions:
 - (i) The touchup and repair occurs after completion of the finishing operation; or
 - (ii) The touchup and repair occurs after the application of stain and before the application of any other type of finishing material, and the materials used for touchup and repair are applied from a container that has a volume of no more than 2.0 gallons.
 - (3) When spray is automated, that is, the spray gun is aimed and triggered automatically, not manually;
 - (4) When emissions from the finishing application station are directed to a control device;
 - (5) The conventional air gun is used to apply finishing materials and the cumulative total usage of that finishing material is no more than 5.0 percent of the total gallons of finishing material used during that semiannual period; or
 - (6) The conventional air gun is used to apply stain on a part for which it is technically or economically infeasible to use any other spray application technology.

The affected source shall demonstrate technical or economic infeasibility by submitting to the Administrator a videotape, a technical report, or other documentation that supports the affected source's claim of technical or economic infeasibility. The following criteria shall be used, either independently or in combination, to support the affected source's claim of technical or economic infeasibility:

- (i) The production speed is too high or the part shape is too complex for one operator to coat the part and the application station is not large enough to accommodate an additional operator; or
 - (ii) The excessively large vertical spray area of the part makes it difficult to avoid sagging or runs in the stain.
- (i) *Line cleaning.* Each owner or operator of an affected source shall pump or drain all organic HAP solvent used for line cleaning into a normally closed container.
- (j) *Gun cleaning.* Each owner or operator of an affected source shall collect all organic HAP solvent used to clean spray guns into a normally closed container.
- (k) *Washoff operations.* Each owner or operator of an affected source shall control emissions from washoff operations by:
- (1) Using normally closed tanks for washoff; and

- (2) Minimizing dripping by tilting or rotating the part to drain as much solvent as possible.
- (1) *Formulation assessment plan for finishing operations.* Each owner or operator of an affected source shall prepare and maintain with the work practice implementation plan a formulation assessment plan that:
 - (1) Identifies VHAP from the list presented in Table 5 of this subpart that are being used in finishing operations by the affected source;
 - (2) Establishes a baseline level of usage by the affected source, for each VHAP identified in paragraph (1)(1) of this section. The baseline usage level shall be the highest annual usage from 1994, 1995, or 1996, for each VHAP identified in paragraph (1)(1) of this section. For formaldehyde, the baseline level of usage shall be based on the amount of free formaldehyde present in the finishing material when it is applied. For styrene, the baseline level of usage shall be an estimate of unreacted styrene, which shall be calculated by multiplying the amount of styrene monomer in the finishing material, when it is applied, by a factor of 0.16. Sources using a control device to reduce emissions may adjust their usage based on the overall control efficiency of the control system, which is determined using the equation in §63.805 (d) or (e).
 - (3) Tracks the annual usage of each VHAP identified in (1)(1) by the affected source that is present in amounts subject to MSDS reporting as required by OSHA.
 - (4) If, after November 1998, the annual usage of the VHAP identified in paragraph (1)(1) exceeds its baseline level, then the owner or operator of the affected source shall provide a written notification to the permitting authority that describes the amount of the increase and explains the reasons for exceedance of the baseline level. The following explanations would relieve the owner or operator from further action, unless the affected source is not in compliance with any State regulations or requirements for that VHAP:
 - (i) The exceedance is no more than 15.0 percent above the baseline level;
 - (ii) Usage of the VHAP is below the de minimis level presented in Table 5 of this subpart for that VHAP (sources using a control device to reduce emissions may adjust their usage based on the overall control efficiency of the control system, which is determined using the procedures in §63.805 (d) or (e));
 - (iii) The affected source is in compliance with its State's air toxic regulations or guidelines for the VHAP; or
 - (iv) The source of the pollutant is a finishing material with a VOC content of no more than 1.0 kg VOC/kg solids (1.0 lb VOC/lb solids), as applied.
- (5) If none of the above explanations are the reason for the increase, the owner or operator shall confer with the permitting authority to discuss the reason for the increase and whether there are practical and reasonable technology-based solutions for reducing the usage. The evaluation of whether a technology is reasonable and practical shall be based on cost, quality, and marketability of the product, whether the technology is being used successfully by other wood furniture manufacturing operations, or other criteria mutually agreed upon by the permitting authority and owner or operator. If there are no practical and reasonable solutions, the facility need take no further action. If there are solutions, the owner or operator shall develop a plan to reduce usage of the pollutant to the extent feasible. The plan shall address the approach to be used to reduce emissions, a timetable for implementing the plan, and a schedule for submitting notification of progress.

- (6) If, after November 1998, an affected source uses a VHAP of potential concern listed in table 6 of this subpart for which a baseline level has not been previously established, then the baseline level shall be established as the *de minimis* level provided in that same table for that chemical. The affected source shall track the annual usage of each VHAP of potential concern identified in this paragraph that is present in amounts subject to MSDS reporting as required by OSHA. If usage of the VHAP of potential concern exceeds the *de minimis* level listed in table 6 of this subpart for that chemical, then the affected source shall provide an explanation to the permitting authority that documents the reason for the exceedance of the *de minimis* level. If the explanation is not one of those listed in paragraphs (1)(4)(i) through (1)(4)(iv) of this section, the affected source shall follow the procedures in paragraph (1)(5) of this section.

[60 FR 62936, Dec. 7, 1995, as amended at 63 FR 71380, Dec. 28, 1998; 68 FR 37353, June 23, 2003]

§ 63.804 Compliance procedures and monitoring requirements.

- (a) The owner or operator of an existing affected source subject to §63.802(a)(1) shall comply with those provisions using any of the methods presented in §63.804 (a)(1) through (a)(4).

- (1) Calculate the average VHAP content for all finishing materials used at the facility using Equation 1, and maintain a value of E no greater than 1.0;

$$E = (M_{c1}C_{c1} + M_{c2}C_{c2} + \dots + M_{cn}C_{cn} + S_1W_1 + S_2W_2 + \dots + S_nW_n) / (M_{c1} + M_{c2} + \dots + M_{cn}) \quad \text{Equation 1}$$

- (2) Use compliant finishing materials according to the following criteria:

- (i) Demonstrate that each stain, sealer, and topcoat has a VHAP content of no more than 1.0 kg VHAP/kg solids (1.0 lb VHAP/lb solids), as applied, and each thinner contains no more than 10.0 percent VHAP by weight by maintaining certified product data sheets for each coating and thinner;
- (ii) Demonstrate that each washcoat, basecoat, and enamel that is purchased pre-made, that is, it is not formulated onsite by thinning another finishing material, has a VHAP content of no more than 1.0 kg VHAP/kg solids (1.0 lb VHAP/lb solids), as applied, and each thinner contains no more than 10.0 percent VHAP by weight by maintaining certified product data sheets for each coating and thinner; and
- (iii) Demonstrate that each washcoat, basecoat, and enamel that is formulated at the affected source is formulated using a finishing material containing no more than 1.0 kg VHAP/kg solids (1.0 lb VHAP/lb solids) and a thinner containing no more than 3.0 percent VHAP by weight.

- (3) Use a control system with an overall control efficiency (R) such that the value of E_{ac} in Equation 2 is no greater than 1.0.

$$R = [(E_{bc} - E_{ac}) / E_{bc}] (100) \quad \text{Equation 2}$$

The value of E_{bc} in Equation 2 shall be calculated using Equation 1; or

- (4) Use any combination of an averaging approach, as described in paragraph (a)(1) of this section, compliant finishing materials, as described in paragraph (a)(2) of this section, and a control system, as described in paragraph (a)(3) of this section.

- (b) The owner or operator of an affected source subject to §63.802(a)(2)(i) shall comply with the provisions by using compliant foam adhesives with a VHAP content no greater than 1.8 kg VHAP/kg solids (1.8 lb VHAP/lb solids), as applied.
- (c) The owner or operator of an affected source subject to §63.802(a)(2)(ii) shall comply with those provisions by using either of the methods presented in §63.804 (c)(1) and (c)(2).
- (1) Use compliant contact adhesives with a VHAP content no greater than 1.0 kg VHAP/kg solids (1.0 lb VHAP/lb solids), as applied; or
 - (2) Use a control system with an overall control efficiency (R) such that the value of G_{ac} is no greater than 1.0.
$$R = [(G_{bc} - G_{ac}) / G_{bc}] (100) \quad \text{Equation 3}$$
- (d) The owner or operator of a new affected source subject to §63.802(b)(1) may comply with those provisions by using any of the following methods:
- (1) Calculate the average VHAP content across all finishing materials used at the facility using Equation 1, and maintain a value of E no greater than 0.8;
 - (2) Use compliant finishing materials according to the following criteria:
 - (i) Demonstrate that each sealer and topcoat has a VHAP content of no more than 0.8 kg VHAP/kg solids (0.8 lb VHAP/lb solids), as applied, each stain has a VHAP content of no more than 1.0 kg VHAP/kg solids (1.0 lb VHAP/lb solids), as applied, and each thinner contains no more than 10.0 percent VHAP by weight;
 - (ii) Demonstrate that each washcoat, basecoat, and enamel that is purchased pre-made, that is, it is not formulated onsite by thinning another finishing material, has a VHAP content of no more than 0.8 kg VHAP/kg solids (0.8 lb VHAP/lb solids), as applied, and each thinner contains no more than 10.0 percent VHAP by weight; and
 - (iii) Demonstrate that each washcoat, basecoat, and enamel that is formulated onsite is formulated using a finishing material containing no more than 0.8 kg VHAP/kg solids (0.8 lb VHAP/lb solids) and a thinner containing no more than 3.0 percent HAP by weight.
 - (3) Use a control system with an overall control efficiency (R) such that the value of E_{ac} in Equation 4 is no greater than 0.8.
$$R = [(E_{bc} - E_{ac}) / E_{bc}] (100) \quad \text{Equation 4}$$

The value of E_{bc} in Equation 4 shall be calculated using Equation 1; or
 - (4) Use any combination of an averaging approach, as described in (d)(1), compliant finishing materials, as described in (d)(2), and a control system, as described in (d)(3).
- (e) The owner or operator of a new affected source subject to §63.802(b)(2) shall comply with the provisions using either of the following methods:
- (1) Use compliant contact adhesives with a VHAP content no greater than 0.2 kg VHAP/kg solids (0.2 lb VHAP/lb solids), as applied; or
 - (2) Use a control system with an overall control efficiency (R) such that the value of G_{ac} in Equation 3 is no greater than 0.2.

- (f) *Initial compliance.* (1) Owners or operators of an affected source subject to the provisions of §63.802 (a)(1) or (b)(1) that comply through the procedures established in §63.804 (a)(1) or (d)(1) shall submit the results of the averaging calculation (Equation 1) for the first month with the initial compliance status report required by §63.807(b). The first month's calculation shall include data for the entire month in which the compliance date falls. For example, if the source's compliance date is November 21, 1997, the averaging calculation shall include data from November 1, 1997, to November 30, 1997.
- (1) Owners or operators of an affected source subject to the provisions of §63.802 (a)(1) or (b)(1) that comply through the procedures established in §63.804 (a)(2) or (d)(2) shall submit an initial compliance status report, as required by §63.807(b), stating that compliant stains, washcoats, sealers, topcoats, basecoats, enamels, and thinners, as applicable, are being used by the affected source.
 - (2) Owners or operators of an affected source subject to the provisions of §63.802 (a)(1) or (b)(1) that are complying through the procedures established in §63.804 (a)(2) or (d)(2) and are applying coatings using continuous coaters shall demonstrate initial compliance by:
 - (i) Submitting an initial compliance status report, as required by §63.807(b), stating that compliant coatings, as determined by the VHAP content of the coating in the reservoir and the VHAP content as calculated from records, and compliant thinners are being used;
or
 - (ii) Submitting an initial compliance status report, as required by §63.807(b), stating that compliant coatings, as determined by the VHAP content of the coating in the reservoir, are being used; the viscosity of the coating in the reservoir is being monitored; and compliant thinners are being used. The affected source shall also submit data that demonstrate that viscosity is an appropriate parameter for demonstrating compliance.
 - (3) Owners or operators of an affected source subject to the provisions of §63.802 (a)(1) or (b)(1) that comply through the procedures established in §63.804 (a)(3) or (d)(3) shall demonstrate initial compliance by:
 - (i) Submitting a monitoring plan that identifies each operating parameter to be monitored for the capture device and discusses why each parameter is appropriate for demonstrating continuous compliance;
 - (ii) Conducting an initial performance test as required under §63.7 using the procedures and test methods listed in §63.7 and §63.805 (c) and (d) or (e);
 - (iii) Calculating the overall control efficiency (R) following the procedures in §63.805 (d) or (e); and
 - (iv) Determining those operating conditions critical to determining compliance and establishing one or more operating parameters that will ensure compliance with the standard.
 - (A) For compliance with a thermal incinerator, minimum combustion temperature shall be the operating parameter.
 - (B) For compliance with a catalytic incinerator equipped with a fixed catalyst bed, the minimum gas temperature both upstream and downstream of the catalyst bed shall be the operating parameter.

- (C) For compliance with a catalytic incinerator equipped with a fluidized catalyst bed, the minimum gas temperature upstream of the catalyst bed and the pressure drop across the catalyst bed shall be the operating parameters.
 - (D) For compliance with a carbon adsorber, the operating parameters shall be the total regeneration mass stream flow for each regeneration cycle and the carbon bed temperature after each regeneration, or the concentration level of organic compounds exiting the adsorber, unless the owner or operator requests and receives approval from the Administrator to establish other operating parameters.
 - (E) For compliance with a control device not listed in this section, one or more operating parameter values shall be established using the procedures identified in §63.804(g)(4)(vi).
- (v) Owners or operators complying with §63.804(f)(4) shall calculate each site-specific operating parameter value as the arithmetic average of the maximum or minimum operating parameter values, as appropriate, that demonstrate compliance with the standards, during the three test runs required by §63.805(c)(1).
- (4) Owners or operators of an affected source subject to the provisions of §63.802 (a)(2) or (b)(2) that comply through the procedures established in §63.804 (b), (c)(1), or (e)(1), shall submit an initial compliance status report, as required by §63.807(b), stating that compliant contact adhesives are being used by the affected source.
- (5) Owners or operators of an affected source subject to the provisions of §63.802 (a)(2)(ii) or (b)(2) that comply through the procedures established in §63.804 (c)(2) or (e)(2), shall demonstrate initial compliance by:
- (i) Submitting a monitoring plan that identifies each operating parameter to be monitored for the capture device and discusses why each parameter is appropriate for demonstrating continuous compliance;
 - (ii) Conducting an initial performance test as required under §63.7 using the procedures and test methods listed in §63.7 and §63.805 (c) and (d) or (e);
 - (iii) Calculating the overall control efficiency (R) following the procedures in §63.805 (d) or (e); and
 - (iv) Determining those operating conditions critical to determining compliance and establishing one or more operating parameters that will ensure compliance with the standard.
- (A) For compliance with a thermal incinerator, minimum combustion temperature shall be the operating parameter.
 - (B) For compliance with a catalytic incinerator equipped with a fixed catalyst bed, the minimum gas temperature both upstream and downstream of the catalyst shall be the operating parameter.
 - (C) For compliance with a catalytic incinerator equipped with a fluidized catalyst bed, the minimum gas temperature upstream of the catalyst bed and the pressure drop across the catalyst bed shall be the operating parameters.

- (v) Owners or operators complying with §63.804(f)(6) shall calculate each site-specific operating parameter value as the arithmetic average of the maximum or minimum operating values as appropriate, that demonstrate compliance with the standards, during the three test runs required by §63.805(c)(1).
- (6) Owners or operators of an affected source subject to the provisions of §63.802 (a)(3) or (b)(3) shall submit an initial compliance status report, as required by §63.807(b), stating that compliant strippable spray booth coatings are being used by the affected source.
- (7) Owners or operators of an affected source subject to the work practice standards in §63.803 shall submit an initial compliance status report, as required by §63.807(b), stating that the work practice implementation plan has been developed and procedures have been established for implementing the provisions of the plan.

(g) *Continuous compliance demonstrations.*

- (1) Owners or operators of an affected source subject to the provisions of §63.802 (a)(1) or (b)(1) that comply through the procedures established in §63.804 (a)(1) or (d)(1) shall demonstrate continuous compliance by submitting the results of the averaging calculation (Equation 1) for each month within that semiannual period and submitting a compliance certification with the semiannual report required by §63.807(c).
 - (i) The compliance certification shall state that the value of (E), as calculated by Equation 1, is no greater than 1.0 for existing sources or 0.8 for new sources. An affected source is in violation of the standard if E is greater than 1.0 for existing sources or 0.8 for new sources for any month. A violation of the monthly average is a separate violation of the standard for each day of operation during the month, unless the affected source can demonstrate through records that the violation of the monthly average can be attributed to a particular day or days during the period.
 - (ii) The compliance certification shall be signed by a responsible official of the company that owns or operates the affected source.
- (2) Owners or operators of an affected source subject to the provisions of §63.802 (a)(1) or (b)(1) that comply through the procedures established in §63.804 (a)(2) or (d)(2) shall demonstrate continuous compliance by using compliant coatings and thinners, maintaining records that demonstrate the coatings and thinners are compliant, and submitting a compliance certification with the semiannual report required by §63.807(c).
 - (i) The compliance certification shall state that compliant stains, washcoats, sealers, topcoats, basecoats, enamels, and thinners, as applicable, have been used each day in the semiannual reporting period or should otherwise identify the periods of noncompliance and the reasons for noncompliance. An affected source is in violation of the standard whenever a noncompliant coating, as demonstrated by records or by a sample of the coating, is used.
 - (ii) The compliance certification shall be signed by a responsible official of the company that owns or operates the affected source.
- (3) Owners or operators of an affected source subject to the provisions of §63.802 (a)(1) or (b)(1) that are complying through the procedures established in §63.804 (a)(2) or (d)(2) and are applying coatings using continuous coaters shall demonstrate continuous compliance by following the procedures in paragraph (g)(3) (i) or (ii) of this section.

-
- (i) Using compliant coatings, as determined by the VHAP content of the coating in the reservoir and the VHAP content as calculated from records, using compliant thinners, and submitting a compliance certification with the semiannual report required by §63.807(c).
 - (A) The compliance certification shall state that compliant coatings have been used each day in the semiannual reporting period, or should otherwise identify the days of noncompliance and the reasons for noncompliance. An affected source is in violation of the standard whenever a noncompliant coating, as determined by records or by a sample of the coating, is used. Use of a noncompliant coating is a separate violation for each day the noncompliant coating is used.
 - (B) The compliance certification shall be signed by a responsible official of the company that owns or operates the affected source.
 - (ii) Using compliant coatings, as determined by the VHAP content of the coating in the reservoir, using compliant thinners, maintaining a viscosity of the coating in the reservoir that is no less than the viscosity of the initial coating by monitoring the viscosity with a viscosity meter or by testing the viscosity of the initial coating and retesting the coating in the reservoir each time solvent is added, maintaining records of solvent additions, and submitting a compliance certification with the semiannual report required by §63.807(c).
 - (A) The compliance certification shall state that compliant coatings, as determined by the VHAP content of the coating in the reservoir, have been used each day in the semiannual reporting period. Additionally, the certification shall state that the viscosity of the coating in the reservoir has not been less than the viscosity of the initial coating, that is, the coating that is initially mixed and placed in the reservoir, for any day in the semiannual reporting period.
 - (B) The compliance certification shall be signed by a responsible official of the company that owns or operates the affected source.
 - (C) An affected source is in violation of the standard when a sample of the as-applied coating exceeds the applicable limit established in §63.804 (a)(2) or (d)(2), as determined using EPA Method 311, or the viscosity of the coating in the reservoir is less than the viscosity of the initial coating.
 - (4) Owners or operators of an affected source subject to the provisions of §63.802 (a)(1) or (b)(1) that comply through the procedures established in §63.804 (a)(3) or (d)(3) shall demonstrate continuous compliance by installing, calibrating, maintaining, and operating the appropriate monitoring equipment according to manufacturer's specifications. The owner or operator shall also submit the excess emissions and continuous monitoring system performance report and summary report required by §63.807(d) and §63.10(e) of subpart A.
 - (i) Where a capture/control device is used, a device to monitor each site-specific operating parameter established in accordance with §63.804(f)(6)(i) is required.
 - (ii) Where an incinerator is used, a temperature monitoring device equipped with a continuous recorder is required.
 - (A) Where a thermal incinerator is used, a temperature monitoring device shall be installed in the firebox or in the ductwork immediately downstream of the firebox in a position before any substantial heat exchange occurs.

- (B) Where a catalytic incinerator equipped with a fixed catalyst bed is used, temperature monitoring devices shall be installed in the gas stream immediately before and after the catalyst bed.
 - (C) Where a catalytic incinerator equipped with a fluidized catalyst bed is used, a temperature monitoring device shall be installed in the gas stream immediately before the bed. In addition, a pressure monitoring device shall be installed to determine the pressure drop across the catalyst bed. The pressure drop shall be measured monthly at a constant flow rate.
- (iii) Where a carbon adsorber is used one of the following is required:
- (A) An integrating stream flow monitoring device having an accuracy of ± 10 percent, capable of recording the total regeneration stream mass flow for each regeneration cycle; and a carbon bed temperature monitoring device, having an accuracy of ± 1 percent of the temperature being monitored or ± 0.5 °C, whichever is greater, and capable of recording the carbon bed temperature after each regeneration and within 15 minutes of completing any cooling cycle;
 - (B) An organic monitoring device, equipped with a continuous recorder, to indicate the concentration level of organic compounds exiting the carbon adsorber; or
 - (C) Any other monitoring device that has been approved by the Administrator in accordance with §63.804(f)(4)(iv)(D).
- (iv) Owners or operators of an affected source shall not operate the capture or control device at a daily average value greater than or less than (as appropriate) the operating parameter values. The daily average value shall be calculated as the average of all values for a monitored parameter recorded during the operating day.
- (v) Owners or operators of an affected source that are complying through the use of a catalytic incinerator equipped with a fluidized catalyst bed shall maintain a constant pressure drop, measured monthly, across the catalyst bed.
- (vi) An owner or operator who uses a control device not listed in §63.804(f)(4) shall submit, for the Administrator's approval, a description of the device, test data verifying performance, and appropriate site-specific operating parameters that will be monitored to demonstrate continuous compliance with the standard.
- (5) Owners or operators of an affected source subject to the provisions of §63.802 (a)(2) (i) or (ii) or (b)(2) that comply through the procedures established in §63.804 (b), (c)(1), or (e)(1), shall submit a compliance certification with the semiannual report required by §63.807(c).
- (i) The compliance certification shall state that compliant contact and/or foam adhesives have been used each day in the semiannual reporting period, or should otherwise identify each day noncompliant contact and/or foam adhesives were used. Each day a noncompliant contact or foam adhesive is used is a single violation of the standard.
 - (ii) The compliance certification shall be signed by a responsible official of the company that owns or operates the affected source.
- (6) Owners or operators of an affected source subject to the provisions of §63.802 (a)(2)(ii) or (b)(2) that comply through the procedures established in §63.804 (c)(2) or (e)(2), shall demonstrate continuous compliance by installing, calibrating, maintaining, and operating the

appropriate monitoring equipment according to the manufacturer's specifications. The owner or operator shall also submit the excess emissions and continuous monitoring system performance report and summary report required by §63.807(d) and §63.10(e) of subpart A of this part.

- (i) Where a capture/control device is used, a device to monitor each site-specific operating parameter established in accordance with §63.804(f)(6)(i) is required.
- (ii) Where an incinerator is used, a temperature monitoring device equipped with a continuous recorder is required.
 - (A) Where a thermal incinerator is used, a temperature monitoring device shall be installed in the firebox or in the ductwork immediately downstream of the firebox in a position before any substantial heat exchange occurs.
 - (B) Where a catalytic incinerator equipped with a fixed catalyst bed is used, temperature monitoring devices shall be installed in the gas stream immediately before and after the catalyst bed.
 - (C) Where a catalytic incinerator equipped with a fluidized catalyst bed is used, a temperature monitoring device shall be installed in the gas stream immediately before the bed. In addition, a pressure monitoring device shall be installed to measure the pressure drop across the catalyst bed. The pressure drop shall be measured monthly at a constant flow rate.
- (iii) Where a carbon adsorber is used one of the following is required:
 - (A) An integrating stream flow monitoring device having an accuracy of ± 10 percent, capable of recording the total regeneration stream mass flow for each regeneration cycle; and a carbon bed temperature monitoring device, having an accuracy of ± 1 percent of the temperature being monitored or ± 0.5 °C, whichever is greater, and capable of recording the carbon bed temperature after each regeneration and within 15 minutes of completing any cooling cycle;
 - (B) An organic monitoring device, equipped with a continuous recorder, to indicate the concentration level of organic compounds exiting the carbon adsorber; or
 - (C) Any other monitoring device that has been approved by the Administrator in accordance with §63.804(f)(4)(iv)(D).
- (iv) Owners or operators of an affected source shall not operate the capture or control device at a daily average value greater than or less than (as appropriate) the operating parameter values. The daily average value shall be calculated as the average of all values for a monitored parameter recorded during the operating day.
- (v) Owners or operators of an affected source that are complying through the use of a catalytic incinerator equipped with a fluidized catalyst bed shall maintain a constant pressure drop, measured monthly, across the catalyst bed.
- (vi) An owner or operator using a control device not listed in this section shall submit to the Administrator a description of the device, test data verifying the performance of the device, and appropriate operating parameter values that will be monitored to demonstrate continuous compliance with the standard. Compliance using this device is subject to the Administrator's approval.

- (7) Owners or operators of an affected source subject to the provisions of §63.802 (a)(3) or (b)(3) shall submit a compliance certification with the semiannual report required by §63.807(c).
 - (i) The compliance certification shall state that compliant strippable spray booth coatings have been used each day in the semiannual reporting period, or should otherwise identify each day noncompliant materials were used. Each day a noncompliant strippable booth coating is used is a single violation of the standard.
 - (ii) The compliance certification shall be signed by a responsible official of the company that owns or operates the affected source.
- (8) Owners or operators of an affected source subject to the work practice standards in §63.803 shall submit a compliance certification with the semiannual report required by §63.807(c).
 - (i) The compliance certification shall state that the work practice implementation plan is being followed, or should otherwise identify the provisions of the plan that have not been implemented and each day the provisions were not implemented. During any period of time that an owner or operator is required to implement the provisions of the plan, each failure to implement an obligation under the plan during any particular day is a violation.
 - (ii) The compliance certification shall be signed by a responsible official of the company that owns or operates the affected source.

§ 63.805 Performance test methods.

- (a) The EPA Method 311 of appendix A of part 63 shall be used in conjunction with formulation data to determine the VHAP content of the liquid coating. Formulation data shall be used to identify VHAP present in the coating. The EPA Method 311 shall then be used to quantify those VHAP identified through formulation data. The EPA Method 311 shall not be used to quantify HAP such as styrene and formaldehyde that are emitted during the cure. The EPA Method 24 (40 CFR Part 60, appendix A) shall be used to determine the solids content by weight and the density of coatings. If it is demonstrated to the satisfaction of the Administrator that a coating does not release VOC or HAP byproducts during the cure, for example, all VOC and HAP present in the coating is solvent, then batch formulation information shall be accepted. The owner or operator of an affected source may request approval from the Administrator to use an alternative method for determining the VHAP content of the coating. In the event of any inconsistency between the EPA Method 24 or Method 311 test data and a facility's formulation data, that is, if the EPA Method 24/311 value is higher, the EPA Method 24/311 test shall govern unless after consultation, a regulated source could demonstrate to the satisfaction of the enforcement agency that the formulation data were correct. Sampling procedures shall follow the guidelines presented in "Standard Procedures for Collection of Coating and Ink Samples for VOC Content Analysis by Reference Method 24 and Reference Method 24A," EPA-340/1-91-010. (Docket No. A-93-10, Item No. IV-A-1).
- (b) Owners or operators demonstrating compliance in accordance with §63.804 (f)(4) or (f)(6) and §63.804 (g)(4) or (g)(6), or complying with any of the other emission limits of §63.802 by operating a capture or control device shall determine the overall control efficiency of the control system (R) as the product of the capture and control device efficiency, using the test methods cited in §63.805(c) and the procedures in §63.805 (d) or (e).
- (c) When an initial compliance demonstration is required by §63.804 (f)(4) or (f)(6) of this subpart, the procedures in paragraphs (c)(1) through (c)(6) of this section shall be used in determining initial compliance with the provisions of this subpart.

- (1) The EPA Method 18 (40 CFR Part 60, appendix A) shall be used to determine the HAP concentration of gaseous air streams. The test shall consist of three separate runs, each lasting a minimum of 30 minutes.
 - (2) The EPA Method 1 or 1A (40 CFR Part 60, appendix A) shall be used for sample and velocity traverses.
 - (3) The EPA Method 2, 2A, 2C, or 2D (40 CFR Part 60, appendix A) shall be used to measure velocity and volumetric flow rates.
 - (4) The EPA Method 3 (40 CFR Part 60, appendix A) shall be used to analyze the exhaust gases.
 - (5) The EPA Method 4 (40 CFR Part 60, appendix A) shall be used to measure the moisture in the stack gas.
 - (6) The EPA Methods 2, 2A, 2C, 2D, 3, and 4 shall be performed, as applicable, at least twice during each test period.
- (d) Each owner or operator of an affected source demonstrating compliance in accordance with §63.804 (f)(4) or (f)(6) shall perform a gaseous emission test using the following procedures:
- (1) Construct the overall HAP emission reduction system so that all volumetric flow rates and total HAP emissions can be accurately determined by the applicable test methods specified in §63.805(c) (1) through (6);
 - (2) Determine capture efficiency from the affected emission point(s) by capturing, venting, and measuring all HAP emissions from the affected emission point(s). During a performance test, the owner or operator shall isolate affected emission point(s) located in an area with other nonaffected gaseous emission sources from all other gaseous emission point(s) by any of the following methods:
 - (i) Build a temporary total enclosure (see §63.801) around the affected emission point(s); or
 - (ii) Use the building that houses the process as the enclosure (see §63.801);
 - (iii) Use any alternative protocol and test method provided they meet either the requirements of the data quality objective (DQO) approach or the lower confidence level (LCL) approach (see §63.801);
 - (iv) Shut down all nonaffected HAP emission point(s) and continue to exhaust fugitive emissions from the affected emission point(s) through any building ventilation system and other room exhausts such as drying ovens. All exhaust air must be vented through stacks suitable for testing; or
 - (v) Use another methodology approved by the Administrator provided it complies with the EPA criteria for acceptance under part 63, appendix A, Method 301.
 - (3) Operate the control device with all affected emission points that will subsequently be delivered to the control device connected and operating at maximum production rate;
 - (4) Determine the efficiency (F) of the control device using the following equation:

$$F = \frac{\sum_{i=1}^n Q_{di} C_{di} - \sum_{j=1}^p Q_{aj} C_{aj}}{\sum_{i=1}^n Q_{di} C_{di}} \quad (\text{Equation 5})$$

- (5) Determine the efficiency (N) of the capture system using the following equation:

$$N = \frac{\sum_{i=1}^n Q_{di} C_{di}}{\sum_{i=1}^n Q_{di} C_{di} + \sum_{k=1}^p Q_{jk} C_{jk}} \quad (\text{Equation 6})$$

- (6) For each affected source complying with §63.802(a)(1) in accordance with §63.804(a)(3), compliance is demonstrated if the product of (F×N)(100) yields a value (R) such that the value of E_{ac} in Equation 2 is no greater than 1.0.
- (7) For each new affected source complying with §63.802(b)(1) in accordance with §63.804(d)(3), compliance is demonstrated if the product of (F×N)(100) yields a value (R) such that the value of E_{ac} in Equation 4 is no greater than 0.8.
- (8) For each affected source complying with §63.802(a)(2)(ii) in accordance with §63.804(c)(2), compliance is demonstrated if the product of (F×N)(100) yields a value (R) such that the value of G_{ac} in Equation 3 is no greater than 1.0.
- (9) For each new affected source complying with §63.802(b)(2) in accordance with §63.804(e)(2), compliance is demonstrated if the product of (F×N)(100) yields a value (R) such that the value of G_{ac} in Equation 3 is no greater than 0.2.
- (e) An alternative method to the compliance method in §63.805(d) is the installation of a permanent total enclosure around the affected emission point(s). A permanent total enclosure presents prima facia evidence that all HAP emissions from the affected emission point(s) are directed to the control device. Each affected source that complies using a permanent total enclosure shall:
- (1) Demonstrate that the total enclosure meets the requirements in paragraphs (e)(1) (i) through (iv). The owner or operator of an enclosure that does not meet these requirements may apply to the Administrator for approval of the enclosure as a total enclosure on a case-by-case basis. The enclosure shall be considered a total enclosure if it is demonstrated to the satisfaction of the Administrator that all HAP emissions from the affected emission point(s) are contained and vented to the control device. The requirements for automatic approval are as follows:
 - (i) The total area of all natural draft openings shall not exceed 5 percent of the total surface area of the total enclosure's walls, floor, and ceiling;
 - (ii) All sources of emissions within the enclosure shall be a minimum of four equivalent diameters away from each natural draft opening;
 - (iii) The average inward face velocity (FV) across all natural draft openings shall be a minimum of 3,600 meters per hour as determined by the following procedures:
 - (A) All forced makeup air ducts and all exhaust ducts are constructed so that the volumetric flow rate in each can be accurately determined by the test methods

specified in §63.805 (c)(2) and (3). Volumetric flow rates shall be calculated without the adjustment normally made for moisture content; and

(B) Determine FV by the following equation:

$$FV = \frac{\sum_{j=1}^n Q_{out j} - \sum_{i=1}^p Q_{in i}}{\sum_{k=1}^q A_k} \quad (\text{Equation 7})$$

- (iv) All access doors and windows whose areas are not included as natural draft openings and are not included in the calculation of FV shall be closed during routine operation of the process.
- (2) Determine the control device efficiency using Equation (5), and the test methods and procedures specified in §63.805 (c)(1) through (6).
 - (3) For each affected source complying with §63.802(a)(1) in accordance with §63.804(a)(3), compliance is demonstrated if:
 - (i) The installation of a permanent total enclosure is demonstrated (N=1);
 - (ii) The value of F is determined from Equation (5); and
 - (iii) The product of (F×N)(100) yields a value (R) such that the value of E_{ac} in Equation 2 is no greater than 1.0.
 - (4) For each new affected source complying with §63.802(b)(1) in accordance with §63.804(d)(3), compliance is demonstrated if:
 - (i) The installation of a permanent total enclosure is demonstrated (N = 1);
 - (ii) The value of F is determined from Equation (5); and
 - (iii) The product of (F×N)(100) yields a value (R) such that the value of E_{ac} in Equation 4 is no greater than 0.8.
 - (5) For each affected source complying with §63.802(a)(2)(ii) in accordance with §63.804(c)(2), compliance is demonstrated if:
 - (i) The installation of a permanent total enclosure is demonstrated (N=1);
 - (ii) The value of F is determined from Equation (5); and
 - (iii) The product of (F×N)(100) yields a value (R) such that the value of G_{ac} in Equation 3 is no greater than 1.0.
 - (6) For each new affected source complying with §63.802(b)(2) in accordance with §63.804(e)(2), compliance is demonstrated if:
 - (i) The installation of a permanent total enclosure is demonstrated (N=1);
 - (ii) The value of F is determined from Equation (5); and
 - (iii) The product of (F×N)(100) yields a value (R) such that the value of G_{ac} in Equation 3 is no greater than 0.2.

§ 63.806 Recordkeeping requirements.

- (a) The owner or operator of an affected source subject to this subpart shall fulfill all recordkeeping requirements of §63.10 of subpart A, according to the applicability criteria in §63.800(d) of this subpart.
- (b) The owner or operator of an affected source subject to the emission limits in §63.802 of this subpart shall maintain records of the following:
 - (1) A certified product data sheet for each finishing material, thinner, contact adhesive, and strippable spray booth coating subject to the emission limits in §63.802; and
 - (2) The VHAP content, in kg VHAP/kg solids (lb VHAP/lb solids), as applied, of each finishing material and contact adhesive subject to the emission limits in §63.802; and
 - (3) The VOC content, in kg VOC/kg solids (lb VOC/lb solids), as applied, of each strippable booth coating subject to the emission limits in §63.802 (a)(3) or (b)(3).
- (c) The owner or operator of an affected source following the compliance method in §63.804 (a)(1) or (d)(1) shall maintain copies of the averaging calculation for each month following the compliance date, as well as the data on the quantity of coatings and thinners used that is necessary to support the calculation of E in Equation 1.
- (d) The owner or operator of an affected source following the compliance procedures of §63.804 (f)(3)(ii) and (g)(3)(ii) shall maintain the records required by §63.806(b) as well as records of the following:
 - (1) Solvent and coating additions to the continuous coater reservoir;
 - (2) Viscosity measurements; and
 - (3) Data demonstrating that viscosity is an appropriate parameter for demonstrating compliance.
- (e) The owner or operator of an affected source subject to the work practice standards in §63.803 of this subpart shall maintain onsite the work practice implementation plan and all records associated with fulfilling the requirements of that plan, including, but not limited to:
 - (1) Records demonstrating that the operator training program required by §63.803(b) is in place;
 - (2) Records collected in accordance with the inspection and maintenance plan required by §63.803(c);
 - (3) Records associated with the cleaning solvent accounting system required by §63.803(d);
 - (4) Records associated with the limitation on the use of conventional air spray guns showing total finishing material usage and the percentage of finishing materials applied with conventional air spray guns for each semiannual period as required by §63.803(h)(5).
 - (5) Records associated with the formulation assessment plan required by §63.803(l); and
 - (6) Copies of documentation such as logs developed to demonstrate that the other provisions of the work practice implementation plan are followed.
- (f) The owner or operator of an affected source following the compliance method of §63.804 (f)(4) or (g)(4) shall maintain copies of the calculations demonstrating that the overall control efficiency (R) of the control system results in the value of E_{ac} required by Equations 2 or 4, records of the operating parameter values, and copies of the semiannual compliance reports required by §63.807(d).

- (g) The owner or operator of an affected source following the compliance method of §63.804 (f)(6) or (g)(6), shall maintain copies of the calculations demonstrating that the overall control efficiency (R) of the control system results in the applicable value of G_{ac} calculated using Equation 3, records of the operating parameter values, and copies of the semiannual compliance reports required by §63.807(d).
- (h) The owner or operator of an affected source subject to the emission limits in §63.802 and following the compliance provisions of §63.804(f) (1), (2), (3), (5), (7) and (8) and §63.804(g) (1), (2), (3), (5), (7), and (8) shall maintain records of the compliance certifications submitted in accordance with §63.807(c) for each semiannual period following the compliance date.
- (i) The owner or operator of an affected source shall maintain records of all other information submitted with the compliance status report required by §63.9(h) and §63.807(b) and the semiannual reports required by §63.807(c).
- (j) The owner or operator of an affected source shall maintain all records in accordance with the requirements of §63.10(b)(1).

§ 63.807 Reporting requirements.

- (a) The owner or operator of an affected source subject to this subpart shall fulfill all reporting requirements of §63.7 through §63.10 of subpart A (General Provisions) according to the applicability criteria in §63.800(d) of this subpart.
- (b) The owner or operator of an affected source demonstrating compliance in accordance with §63.804(f) (1), (2), (3), (5), (7) and (8) shall submit the compliance status report required by §63.9(h) of subpart A (General Provisions) no later than 60 days after the compliance date. The report shall include the information required by §63.804(f) (1), (2), (3), (5), (7), and (8) of this subpart.
- (c) The owner or operator of an affected source demonstrating compliance in accordance with §63.804(g) (1), (2), (3), (5), (7), and (8) shall submit a report covering the previous 6 months of wood furniture manufacturing operations:
 - (1) The first report shall be submitted 30 calendar days after the end of the first 6-month period following the compliance date.
 - (2) Subsequent reports shall be submitted 30 calendar days after the end of each 6-month period following the first report.
 - (3) The semiannual reports shall include the information required by §63.804(g) (1), (2), (3), (5), (7), and (8), a statement of whether the affected source was in compliance or noncompliance, and, if the affected source was in noncompliance, the measures taken to bring the affected source into compliance.
 - (4) The frequency of the reports required by paragraph (c) of this section shall not be reduced from semiannually regardless of the history of the owner's or operator's compliance status.
- (d) The owner or operator of an affected source demonstrating compliance in accordance with §63.804(g) (4) and (6) of this subpart shall submit the excess emissions and continuous monitoring system performance report and summary report required by §63.10(e) of subpart A. The report shall include the monitored operating parameter values required by §63.804(g) (4) and (6). If the source experiences excess emissions, the report shall be submitted quarterly for at least 1 year after the

excess emissions occur and until a request to reduce reporting frequency is approved, as indicated in §63.10(e)(3)(C). If no excess emissions occur, the report shall be submitted semiannually.

- (e) The owner or operator of an affected source required to provide a written notification under §63.803(1)(4) shall include in the notification one or more statements that explains the reasons for the usage increase. The notification shall be submitted no later than 30 calendar days after the end of the annual period in which the usage increase occurred.

§ 63.808 Implementation and enforcement.

- (a) This subpart can be implemented and enforced by the U.S. EPA, or a delegated authority such as the applicable State, local, or Tribal agency. If the U.S. EPA Administrator has delegated authority to a State, local, or Tribal agency, then that agency, in addition to the U.S. EPA, has the authority to implement and enforce this subpart. Contact the applicable U.S. EPA Regional Office to find out if implementation and enforcement of this subpart is delegated to a State, local, or Tribal agency.
- (b) In delegating implementation and enforcement authority of this subpart to a State, local, or Tribal agency under subpart E of this part, the authorities contained in paragraph (c) of this section are retained by the Administrator of U.S. EPA and cannot be transferred to the State, local, or Tribal agency.
- (c) The authorities that cannot be delegated to State, local, or Tribal agencies are as specified in paragraphs (c)(1) through (5) of this section.
 - (1) Approval of alternatives to the requirements in §§63.800, 63.802, and 63.803(a)(1), (b), (c) introductory text, and (d) through (l).
 - (2) Approval of alternatives to the monitoring and compliance requirements in §§63.804(f)(4)(iv)(D) and (E), 63.804(g)(4)(iii)(C), 63.804(g)(4)(vi), and 63.804(g)(6)(vi).
 - (3) Approval of major alternatives to test methods under §63.7(e)(2)(ii) and (f), as defined in §63.90, and as required in this subpart, as well as approval of any alternatives to the specific test methods under §§63.805(a), 63.805(d)(2)(v), and 63.805(e)(1).
 - (4) Approval of major alternatives to monitoring under §63.8(f), as defined in §63.90, and as required in this subpart.
 - (5) Approval of major alternatives to recordkeeping and reporting under §63.10(f), as defined in §63.90, and as required in this subpart.

[68 FR 37354, June 23, 2003]

§§ 63.809-63.819 [Reserved]

Table 1 to Subpart JJ of Part 63—General Provisions Applicability to Subpart JJ

Reference	Applies to subpart JJ	Comment
63.1(a)	Yes	
63.1(b)(1)	No	Subpart JJ specifies applicability.
63.1(b)(2)	Yes	
63.1(b)(3)	Yes	

Reference	Applies to subpart JJ	Comment
63.1(c)(1)	No	Subpart JJ specifies applicability.
63.1(c)(2)	No	Area sources are not subject to subpart JJ.
63.1(c)(4)	Yes	
63.1(c)(5)	Yes	
63.1(e)	Yes	
63.2	Yes	Additional terms are defined in 63.801(a) of subpart JJ. When overlap between subparts A and JJ occurs, subpart JJ takes precedence.
63.3	Yes	Other units used in subpart JJ are defined in 63.801(b).
63.4	Yes	
63.5	Yes	
63.6(a)	Yes	
63.6(b)(1)	Yes	
63.6(b)(2)	Yes	
63.6(b)(3)	Yes	
63.6(b)(4)	No	May apply when standards are proposed under Section 112(f) of the CAA.
63.6(b)(5)	Yes	
63.6(b)(7)	Yes	
63.6(c)(1)	Yes	
63.6(c)(2)	No	
63.6(c)(5)	Yes	
63.6(e)(1)	Yes	
63.6(e)(2)	Yes	
63.6(e)(3)	Yes	Applies only to affected sources using a control device to comply with the rule.
63.6(f)(1)	No	Affected sources complying through the procedures specified in 63.804 (a)(1), (a)(2), (b), (c)(1), (d)(1), (d)(2), (e)(1), and (e)(2) are subject to the emission standards at all times, including periods of startup, shutdown, and malfunction.
63.6(f)(2)	Yes	
63.6(f)(3)	Yes	

Reference	Applies to subpart JJ	Comment
63.6(g)	Yes	
63.6(h)	No	
63.6 (i)(1)–(i)(3)	Yes	
63.6(i)(4)(i)	Yes	
63.6(i)(4)(ii)	No	
63.6 (i)(5)–(i)(14)	Yes	
63.6(i)(16)	Yes	
63.6(j)	Yes	
63.7	Yes	Applies only to affected sources using a control device to comply with the rule.
63.8	Yes	Applies only to affected sources using a control device to comply with the rule.
63.9(a)	Yes	
63.9(b)	Yes	Existing sources are required to submit initial notification report within 270 days of the effective date.
63.9(c)	Yes	
63.9(d)	Yes	
63.9(e)	Yes	Applies only to affected sources using a control device to comply with the rule.
63.9(f)	No	
63.9(g)	Yes	Applies only to affected sources using a control device to comply with the rule.
63.9(h)	Yes	63.9(h)(2)(ii) applies only to affected sources using a control device to comply with the rule.
63.9(i)	Yes	
63.9(j)	Yes	
63.10(a)	Yes	
63.10(b)(1)	Yes	
63.10(b)(2)	Yes	Applies only to affected sources using a control device to comply with the rule.
63.10(b)(3)	Yes	

Reference	Applies to subpart JJ	Comment
63.10(c)	Yes	
63.10(d)(1)	Yes	
63.10(d)(2)	Yes	Applies only to affected sources using a control device to comply with the rule.
63.10(d)(3)	No	
63.10(d)(4)	Yes	
63.10(d)(5)	Yes	Applies only to affected sources using a control device to comply with the rule.
63.10(e)	Yes	Applies only to affected sources using a control device to comply with the rule.
63.10(f)	Yes	
63.11	No	
63.12–63.15	Yes	

Table 2 to Subpart JJ of Part 63—List of Volatile Hazardous Air Pollutants

Chemical name	CAS No.
Acetaldehyde	75070
Acetamide	60355
Acetonitrile	75058
Acetophenone	98862
2-Acetylaminofluorine	53963
Acrolein	107028
Acrylamide	79061
Acrylic acid	79107
Acrylonitrile	107131
Allyl chloride	107051
4-Aminobiphenyl	92671
Aniline	62533
o-Anisidine	90040
Benzene	71432
Benzidine	92875
Benzotrichloride	98077

Chemical name	CAS No.
Benzyl chloride	100447
Biphenyl	92524
Bis (2-ethylhexyl) phthalate (DEHP)	117817
Bis (chloromethyl) ether	542881
Bromoform	75252
1,3-Butadiene	106990
Carbon disulfide	75150
Carbon tetrachloride	56235
Carbonyl sulfide	463581
Catechol	120809
Chloroacetic acid	79118
2-Chloroacetophenone	532274
Chlorobenzene	108907
Chloroform	67663
Chloromethyl methyl ether	107302
Chloroprene	126998
Cresols (isomers and mixture)	1319773
o-Cresol	95487
m-Cresol	108394
p-Cresol	106445
Cumene	98828
2,4-D (2,4-Dichlorophenoxyacetic acid, including salts and esters)	94757
DDE (1,1-Dichloro-2,2-bis(p-chlorophenyl)ethylene)	72559
Diazomethane	334883
Dibenzofuran	132649
1,2-Dibromo-3-chloropropane	96128
Dibutylphthalate	84742
1,4-Dichlorobenzene	106467
3,3'-Dichlorobenzidine	91941
Dichloroethyl ether (Bis(2-chloroethyl)ether)	111444
1,3-Dichloropropene	542756

Chemical name	CAS No.
Diethanolamine	111422
N,N-Dimethylaniline	121697
Diethyl sulfate	64675
3,3'-Dimethoxybenzidine	119904
4-Dimethylaminoazobenzene	60117
3,3'-Dimethylbenzidine	119937
Dimethylcarbamoyl chloride	79447
N,N-Dimethylformamide	68122
1,1-Dimethylhydrazine	57147
Dimethyl phthalate	131113
Dimethyl sulfate	77781
4,6-Dinitro-o-cresol, and salts	534521
2,4-Dinitrophenol	51285
2,4-Dinitrotoluene	121142
1,4-Dioxane (1,4-Diethyleneoxide)	123911
1,2-Diphenylhydrazine	122667
Epichlorohydrin (1-Chloro-2,3-epoxypropane)	106898
1,2-Epoxybutane	106887
Ethyl acrylate	140885
Ethylbenzene	100414
Ethyl carbamate (Urethane)	51796
Ethyl chloride (Chloroethane)	75003
Ethylene dibromide (Dibromoethane)	106934
Ethylene dichloride (1,2-Dichloroethane)	107062
Ethylene glycol	107211
Ethylene oxide	75218
Ethylenethiourea	96457
Ethylidene dichloride (1,1-Dichloroethane)	75343
Formaldehyde	50000
Glycolethers ^a	
Hexachlorobenzene	118741

Chemical name	CAS No.
Hexachloro-1,3-butadiene	87683
Hexachloroethane	67721
Hexamethylene-1,6-diisocyanate	822060
Hexamethylphosphoramide	680319
Hexane	110543
Hydrazine	302012
Hydroquinone	123319
Isophorone	78591
Maleic anhydride	108316
Methanol	67561
Methyl bromide (Bromomethane)	74839
Methyl chloride (Chloromethane)	74873
Methyl chloroform (1,1,1-Trichloroethane)	71556
Methyl ethyl ketone (2-Butanone)	78933
Methylhydrazine	60344
Methyl iodide (Iodomethane)	74884
Methyl isobutyl ketone (Hexone)	108101
Methyl isocyanate	624839
Methyl methacrylate	80626
Methyl tert-butyl ether	1634044
4,4'-Methylenebis (2-chloroaniline)	101144
Methylene chloride (Dichloromethane)	75092
4,4'-Methylenediphenyl diisocyanate (MDI)	101688
4,4'-Methylenedianiline	101779
Naphthalene	91203
Nitrobenzene	98953
4-Nitrobiphenyl	92933
4-Nitrophenol	100027
2-Nitropropane	79469
N-Nitroso-N-methylurea	684935
N-Nitrosodimethylamine	62759

Chemical name	CAS No.
N-Nitrosomorpholine	59892
Phenol	108952
p-Phenylenediamine	106503
Phosgene	75445
Phthalic anhydride	85449
Polychlorinated biphenyls (Aroclors)	1336363
Polycyclic Organic Matter ^b	
1,3-Propane sultone	1120714
beta-Propiolactone	57578
Propionaldehyde	123386
Propoxur (Baygon)	114261
Propylene dichloride (1,2-Dichloropropane)	78875
Propylene oxide	75569
1,2-Propylenimine (2-Methyl aziridine)	75558
Quinone	106514
Styrene	100425
Styrene oxide	96093
2,3,7,8-Tetrachlorodibenzo-p-dioxin	1746016
1,1,2,2-Tetrachloroethane	79345
Tetrachloroethylene (Perchloroethylene)	127184
Toluene	108883
2,4-Toluenediamine	95807
Toluene-2,4-diisocyanate	584849
o-Toluidine	95534
1,2,4-Trichlorobenzene	120821
1,1,2-Trichloroethane	79005
Trichloroethylene	79016
2,4,5-Trichlorophenol	95954
2,4,6-Trichlorophenol	88062
Triethylamine	121448
Trifluralin	1582098

Chemical name	CAS No.
2,2,4-Trimethylpentane	540841
Vinyl acetate	108054
Vinyl bromide	593602
Vinyl chloride	75014
Vinylidene chloride (1,1-Dichloroethylene)	75354
Xylenes (isomers and mixture)	1330207
o-Xylene	95476
m-Xylene	108383
p-Xylene	106423

^aIncludes mono- and di-ethers of ethylene glycol, diethylene glycols and triethylene glycol; R-(OCH₂CH₂)_n-OH

RR-OR

where:

n = 1, 2, or 3,

R = alkyl or aryl groups

R' = R, H, or groups which, when removed, yield glycol ethers with the structure: R-(OCH₂CH₂)_n-OH.

Polymers are excluded from the glycol category.

^bIncludes organic compounds with more than one benzene ring, and which have a boiling point greater than or equal to 100°C.

[63 FR 71381, Dec. 28, 1998]

Table 3 to Subpart JJ of Part 63—Summary of Emission Limits

Emission point	Existing source	New source
Finishing Operations:		
(a) Achieve a weighted average VHAP content across all coatings (maximum kg VHAP/kg solids [lb VHAP/lb solids], as applied)	^a 1.0	^a 0.8
(b) Use compliant finishing materials (maximum kg VHAP/kg solids [lb VHAP/lb solids], as applied):		
—stains	^a 1.0	^a 1.0
—washcoats	^{a,b} 1.0	^{a,b} 0.8
—sealers	^a 1.0	^a 0.8
—topcoats	^a 1.0	^a 0.8
—basecoats	^{a,b} 1.0	^{a,b} 0.8
—enamels	^{a,b} 1.0	^{a,b} 0.8
—thinners (maximum percent VHAP allowable); or	10	10
(c) As an alternative, use control device; or	^c 1.0	^c 0.8

Emission point	Existing source	New source
(d) Use any combination of (a), (b), and (c)	1	0.8
Cleaning Operations:		
Strippable spray booth material (maximum VOC content, kg VOC/kg solids [lb VOC/lb solids])	0.8	0.8
Contact Adhesives:		
(a) Use compliant contact adhesives (maximum kg VHAP/kg solids [lb VHAP/lb solids], as applied) based on following criteria:		
i. For aerosol adhesives, and for contact adhesives applied to nonporous substrates	^d NA	^d NA
ii. For foam adhesives used in products that meet flammability requirements	1.8	0.2
iii. For all other contact adhesives (including foam adhesives used in products that do not meet flammability requirements); or	1	0.2
(b) Use a control device	^e 1.0	^e 0.2

^aThe limits refer to the VHAP content of the coating, as applied.

^bWashcoats, basecoats, and enamels must comply with the limits presented in this table if they are purchased premade, that is, if they are not formulated onsite by thinning other finishing materials. If they are formulated onsite, they must be formulated using compliant finishing materials, i.e., those that meet the limits specified in this table, and thinners containing no more than 3.0 percent VHAP by weight.

^cThe control device must operate at an efficiency that is equivalent to no greater than 1.0 kilogram (or 0.8 kilogram) of VHAP being emitted from the affected emission source per kilogram of solids used.

^dThere is no limit on the VHAP content of these adhesives.

^eThe control device must operate at an efficiency that is equivalent to no greater than 1.0 kilogram (or 0.2 kilogram) of VHAP being emitted from the affected emission source per kilogram of solids used.

[60 FR 62936, Dec. 7, 1995, as amended at 62 FR 30260, June 3, 1997]

Table 4 to Subpart JJ of Part 63—Pollutants Excluded From Use in Cleaning and Washoff Solvents

Chemical name	CAS No.
4-Aminobiphenyl	92671
Styrene oxide	96093
Diethyl sulfate	64675
N-Nitrosomorpholine	59892
Dimethyl formamide	68122
Hexamethylphosphoramide	680319

Chemical name	CAS No.
Acetamide	60355
4,4'-Methylenedianiline	101779
o-Anisidine	90040
2,3,7,8-Tetrachlorodibenzo-p-dioxin	1746016
Beryllium salts	
Benzidine	92875
N-Nitroso-N-methylurea	684935
Bis (chloromethyl) ether	542881
Dimethyl carbamoyl chloride	79447
Chromium compounds (hexavalent)	
1,2-Propylenimine (2-Methyl aziridine)	75558
Arsenic and inorganic arsenic compounds	1E+08
Hydrazine	302012
1,1-Dimethyl hydrazine	57147
Beryllium compounds	7440417
1,2-Dibromo-3-chloropropane	96128
N-Nitrosodimethylamine	62759
Cadmium compounds	
Benzo (a) pyrene	50328
Polychlorinated biphenyls (Aroclors)	1336363
Heptachlor	76448
3,3'-Dimethyl benzidine	119937
Nickel subsulfide	1.2E+07
Acrylamide	79061
Hexachlorobenzene	118741
Chlordane	57749
1,3-Propane sultone	1120714
1,3-Butadiene	106990
Nickel refinery dust	
2-Acetylaminoflourine	53963
3,3'-Dichlorobenzidine	53963
Lindane (hexachlorcyclohexane, gamma)	58899
2,4-Toluene diamine	95807
Dichloroethyl ether (Bis(2-chloroethyl) ether)	111444
1,2-Diphenylhydrazine	122667
Toxaphene (chlorinated camphene)	8001352
2,4-Dinitrotoluene	121142
3,3'-Dimethoxybenzidine	119904
Formaldehyde	50000

Chemical name	CAS No.
4,4'-Methylene bis (2-chloroaniline)	101144
Acrylonitrile	107131
Ethylene dibromide (1,2-Dibromoethane)	106934
DDE (1,1-p-chlorophenyl 1-2 dichloroethylene)	72559
Chlorobenzilate	510156
Dichlorvos	62737
Vinyl chloride	75014
Coke Oven Emissions	
Ethylene oxide	75218
Ethylene thiourea	96457
Vinyl bromide (bromoethene)	593602
Selenium sulfide (mono and di)	7488564
Chloroform	67663
Pentachlorophenol	87865
Ethyl carbamate (Urethane)	51796
Ethylene dichloride (1,2-Dichloroethane)	107062
Propylene dichloride (1,2-Dichloropropane)	78875
Carbon tetrachloride	56235
Benzene	71432
Methyl hydrazine	60344
Ethyl acrylate	140885
Propylene oxide	75569
Aniline	62533
1,4-Dichlorobenzene(p)	6467
2,4,6-Trichlorophenol	88062
Bis (2-ethylhexyl) phthalate (DEHP)	117817
o-Toluidine	95534
Propoxur	114261
1,4-Dioxane (1,4-Diethyleneoxide)	123911
Acetaldehyde	75070
Bromoform	75252
Captan	133062
Epichlorohydrin	106898
Methylene chloride (Dichloromethane)	75092
Dibenz (ah) anthracene	53703
Chrysene	218019
Dimethyl aminoazobenzene	60117
Benzo (a) anthracene	56553
Benzo (b) fluoranthene	205992

Chemical name	CAS No.
Antimony trioxide	1309644
2-Nitropropane	79469
1,3-Dichloropropene	542756
7, 12-Dimethylbenz(a) anthracene	57976
Benz(c) acridine	225514
Indeno(1,2,3-cd)pyrene	193395
1,2:7,8-Dibenzopyrene	189559

[63 FR 71382, Dec. 28, 1998]

Table 5 to Subpart JJ of Part 63—List of VHAP of Potential Concern Identified by Industry

CAS No.	Chemical name	EPA de minimis, tons/yr
68122	Dimethyl formamide	1.0
50000	Formaldehyde	0.2
75092	Methylene chloride	4.0
79469	2-Nitropropane	1.0
78591	Isophorone	0.7
1000425	Styrene monomer	1.0
108952	Phenol	0.1
111422	Dimethanolamine	5.0
109864	2-Methoxyethanol	10.0
111159	2-Ethoxyethyl acetate	10.0

[63 FR 71382, Dec. 28, 1998]

Table 6 to Subpart JJ of Part 63—VHAP of Potential Concern

CAS No.	Chemical name	EPA de minimis, tons/yr*
92671	4-Aminobiphenyl	1.0
96093	Styrene oxide	1.0
64675	Diethyl sulfate	1.0
59892	N-Nitrosomorpholine	1.0
68122	Dimethyl formamide	1.0
680319	Hexamethylphosphoramide	0.01

CAS No.	Chemical name	EPA de minimis, tons/yr*
60355	Acetamide	1.0
101779	4,4'-Methylenedianiline	1.0
90040	o-Anisidine	1.0
1746016	2,3,7,8-Tetrachlorodibenzo-p-dioxin	0.00000006
92875	Benzidine	0.00003
684935	N-Nitroso-N-methylurea	0.00002
542881	Bis(chloromethyl) ether	0.00003
79447	Dimethyl carbamoyl chloride	0.002
75558	1,2-Propylenimine (2-Methyl aziridine)	0.0003
57147	1,1-Dimethyl hydrazine	0.0008
96128	1,2-Dibromo-3-chloropropane	0.001
62759	N-Nitrosodimethylamine	0.0001
50328	Benzo (a) pyrene	0.001
1336363	Polychlorinated biphenyls (Aroclors)	0.0009
76448	Heptachlor	0.002
119937	3,3'-Dimethyl benzidine	0.001
79061	Acrylamide	0.002
118741	Hexachlorobenzene	0.004
57749	Chlordane	0.005
1120714	1,3-Propane sultone	0.003
106990	1,3-Butadiene	0.007
53963	2-Acetylaminothiourea	0.0005
91941	3,3'-Dichlorobenzidine	0.02
58899	Lindane (hexachlorocyclohexane, gamma)	0.005
95807	2,4-Toluene diamine	0.002
111444	Dichloroethyl ether (Bis(2-chloroethyl)ether)	0.006
122667	1,2-Diphenylhydrazine	0.009
8001352	Toxaphene (chlorinated camphene)	0.006
121142	2,4-Dinitrotoluene	0.002

CAS No.	Chemical name	EPA de minimis, tons/yr*
119904	3,3'-Dimethoxybenzidine	0.01
50000	Formaldehyde	0.2
101144	4,4'-Methylene bis(2-chloroaniline)	0.02
107131	Acrylonitrile	0.03
106934	Ethylene dibromide(1,2-Dibromoethane)	0.01
72559	DDE (1,1-p-chlorophenyl 1-2 dichloroethylene)	0.01
510156	Chlorobenzilate	0.04
62737	Dichlorvos	0.02
75014	Vinyl chloride	0.02
75218	Ethylene oxide	0.09
96457	Ethylene thiourea	0.06
593602	Vinyl bromide (bromoethene)	0.06
67663	Chloroform	0.09
87865	Pentachlorophenol	0.07
51796	Ethyl carbamate (Urethane)	0.08
107062	Ethylene dichloride (1,2-Dichloroethane)	0.08
78875	Propylene dichloride (1,2-Dichloropropane)	0.1
56235	Carbon tetrachloride	0.1
71432	Benzene	0.2
140885	Ethyl acrylate	0.1
75569	Propylene oxide	0.5
62533	Aniline	0.1
106467	1,4-Dichlorobenzene(p)	0.3
88062	2,4,6-Trichlorophenol	0.6
117817	Bis (2-ethylhexyl) phthalate (DEHP)	0.5
95534	o-Toluidine	0.4
114261	Propoxur	2.0
79016	Trichloroethylene	1.0
123911	1,4-Dioxane (1,4-Diethyleneoxide)	0.6

CAS No.	Chemical name	EPA de minimis, tons/yr*
75070	Acetaldehyde	0.9
75252	Bromoform	2.0
133062	Captan	2.0
106898	Epichlorohydrin	2.0
75092	Methylene chloride (Dichloromethane)	4.0
127184	Tetrachloroethylene (Perchloroethylene)	4.0
53703	Dibenz (ah) anthracene	0.01
218019	Chrysene	0.01
60117	Dimethyl aminoazobenzene	1.0
56553	Benzo (a) anthracene	0.01
205992	Benzo (b) fluoranthene	0.01
79469	2-Nitropropane	1.0
542756	1,3-Dichloropropene	1.0
57976	7,12-Dimethylbenz (a) anthracene	0.01
225514	Benz(c)acridine	0.01
193395	Indeno(1,2,3-cd)pyrene	0.01
189559	1,2:7,8-Dibenzopyrene	0.01
79345	1,1,2,2-Tetrachloroethane	0.03
91225	Quinoline	0.0006
75354	Vinylidene chloride (1,1-Dichloroethylene)	0.04
87683	Hexachlorobutadiene	0.09
82688	Pentachloronitrobenzene (Quintobenzene)	0.03
78591	Isophorone	0.7
79005	1,1,2-Trichloroethane	0.1
74873	Methyl chloride (Chloromethane)	1.0
67721	Hexachloroethane	0.5
1582098	Trifluralin	0.9
1319773	Cresols/Cresylic acid (isomers and mixture)	1.0
108394	m-Cresol	1.0

CAS No.	Chemical name	EPA de minimis, tons/yr*
75343	Ethylidene dichloride (1,1-Dichloroethane)	1.0
95487	o-Cresol	1.0
106445	p-Cresol	1.0
74884	Methyl iodide (Iodomethane)	1.0
100425	Styrene	1.0
107051	Allyl chloride	1.0
334883	Diazomethane	1.0
95954	2,4,5—Trichlorophenol	1.0
133904	Chloramben	1.0
106887	1,2—Epoxybutane	1.0
108054	Vinyl acetate	1.0
126998	Chloroprene	1.0
123319	Hydroquinone	1.0
92933	4-Nitrobiphenyl	1.0
56382	Parathion	0.1
13463393	Nickel Carbonyl	0.1
60344	Methyl hydrazine	0.006
151564	Ethylene imine	0.0003
77781	Dimethyl sulfate	0.1
107302	Chloromethyl methyl ether	0.1
57578	beta-Propiolactone	0.1
100447	Benzyl chloride	0.04
98077	Benzotrichloride	0.0006
107028	Acrolein	0.04
584849	2,4—Toluene diisocyanate	0.1
75741	Tetramethyl lead	0.01
78002	Tetraethyl lead	0.01
12108133	Methylcyclopentadienyl manganese	0.1
624839	Methyl isocyanate	0.1

CAS No.	Chemical name	EPA de minimis, tons/yr*
77474	Hexachlorocyclopentadiene	0.1
62207765	Fluomine	0.1
10210681	Cobalt carbonyl	0.1
79118	Chloroacetic acid	0.1
534521	4,6-Dinitro-o-cresol, and salts	0.1
101688	Methylene diphenyl diisocyanate	0.1
108952	Phenol	0.1
62384	Mercury, (acetato-o) phenyl	0.01
98862	Acetophenone	1.0
108316	Maleic anhydride	1.0
532274	2-Chloroacetophenone	0.06
51285	2,4-Dinitrophenol	1.0
109864	2-Methoxy ethanol	10.0
98953	Nitrobenzene	1.0
74839	Methyl bromide (Bromomethane)	10.0
75150	Carbon disulfide	1.0
121697	N,N-Dimethylaniline	1.0
106514	Quinone	5.0
123386	Propionaldehyde	5.0
120809	Catechol	5.0
85449	Phthalic anhydride	5.0
463581	Carbonyl sulfide	5.0
132649	Dibenzofurans	5.0
100027	4-Nitrophenol	5.0
540841	2,2,4-Trimethylpentane	5.0
111422	Diethanolamine	5.0
822060	Hexamethylene-1,6-diisocyanate	5.0
	Glycol ethers ^a	5.0
	Polycyclic organic matter ^b	0.01

*These values are based on the de minimis levels provided in the proposed rulemaking pursuant to section 112(g) of the Act using a 70-year lifetime exposure duration for all VHAP. Default assumptions and the de minimis values based on inhalation reference doses (RfC) are not changed by this adjustment.

^aExcept for ethylene glycol butyl ether, ethylene glycol ethyl ether (2-ethoxy ethanol), ethylene glycol hexyl ether, ethylene glycol methyl ether (2-methoxyethanol), ethylene glycol phenyl ether, ethylene glycol propyl ether, ethylene glycol mono-2-ethylhexyl ether, diethylene glycol butyl ether, diethylene glycol ethyl ether, diethylene glycol methyl ether, diethylene glycol hexyl ether, diethylene glycol phenyl ether, diethylene glycol propyl ether, triethylene glycol butyl ether, triethylene glycol ethyl ether, triethylene glycol methyl ether, triethylene glycol propyl ether, ethylene glycol butyl ether acetate, ethylene glycol ethyl ether acetate, and diethylene glycol ethyl ether acetate.

^bExcept for benzo(b)fluoranthene, benzo(a)anthracene, benzo(a)pyrene, 7,12-dimethylbenz(a)anthracene, benz(c)acridine, chrysene, dibenz(ah) anthracene, 1,2:7,8-dibenzopyrene, indeno(1,2,3-cd)pyrene, but including dioxins and furans.

[63 FR 71383, Dec. 28, 1998]

Attachment F

Method 9 Opacity Emissions Observations								
Company					Observer			
Location					Observer Certification Date			
Date					Emission Unit			
Time					Control Device			
Hour	Minute	Seconds				Steam Plume (check if applicable)		Comments
		0	15	30	45	Attached	Detached	
	0							
	1							
	2							
	3							
	4							
	5							
	6							
	7							
	8							
	9							
	10							
	11							
	12							
	13							
	14							
	15							
	16							
	17							
	18							
SUMMARY OF AVERAGE OPACITY								
Set Number	Time				Opacity			
	Start	End	Sum	Average				

Readings ranged from _____ to _____ % opacity.

Was the emission unit in compliance at the time of evaluation? _____
 YES NO Signature of Observer

STATEMENT OF BASIS

Permit Reference Documents

These documents were relied upon in the preparation of the operating permit. Because they are not incorporated by reference, they are not an official part of the operating permit.

- 1) Part 70 Operating Permit Application, received January 26, 2006;
- 2) 2008 Emissions Inventory Questionnaire, received May 1, 2009;
- 3) Part 70 Operating Permit OP 2001020, effective date March 6, 2001;
- 4) U.S. EPA document AP-42, *Compilation of Air Pollutant Emission Factors*; Volume I, Stationary Point and Area Sources, Fifth Edition; and
- 5) Macromelt Q 5613; MSDS No. 1153925; Henkel Corp: Rocky Hill, CT, April 16, 2008.

Applicable Requirements Included in the Operating Permit but Not in the Application or Previous Operating Permits

In the operating permit application, the installation indicated they were not subject to the following regulation(s). However, in the review of the application, the agency has determined that the installation is subject to the following regulation(s) for the reasons stated.

None

Other Air Regulations Determined Not to Apply to the Operating Permit

The Air Pollution Control Program (APCP) has determined the following requirements to not be applicable to this installation at this time for the reasons stated.

10 CSR 10-6.100, *Alternate Emission Limits*

This rule is not applicable because the installation is in an ozone attainment area.

Construction Permit Revisions

The following revisions were made to construction permits for this installation:

- 1) Missouri Department of Natural Resources Construction Permit No. 0491-006 authorized the installation of a wood-fired boiler.
 - a) The wood-fired boiler has been removed from service and therefore is not included in the operating permit.
- 2) Missouri Department of Natural Resources Construction Permit No. 1193-009 authorized the installation of the Aqueous Degreaser Tank (EU0040) the Electro Deposition Paint Machine (EU0050) and Electro Deposition Paint Oven (EP-03).
 - a) Special Conditions 1, 2 and 3 were superseded by Special Condition 1 of Construction Permit No. 072002-011 and are not included in the operating permit.
 - b) Special Condition 4 established reporting requirements relating to Special Conditions 1, 2, and 3. Since these conditions were superseded, Special Condition 4 is not included in the operating permit
 - c) Special Condition 5 required the permittee to dismantle a vapor degreaser and cease the use of 1,1,1 trichloroethane. Since the vapor degreaser has been dismantled, this permit condition is not included in the operating permit.

- 3) Missouri Department of Natural Resources Construction Permit No. 0794-001 authorized the installation of the EMTEC Electro vap 150 Evaporator.
 - a) The evaporator has been removed from service. Therefore, the special conditions associated with this construction permit are not included in the operating permit.
- 4) Missouri Department of Natural Resources Construction Permit No. 0995-012 authorized the installation of Poly Adhesive Spray Booths 1 and 2 (EU0010 and EU0020).
 - a) There were no revisions made to this construction permit.
- 5) Missouri Department of Natural Resources Construction Permit No. 0896-004 authorized the installation of Poly Adhesive Spray Booth 3 (EU0030).
 - a) There were no revisions made to this construction permit.
- 6) Missouri Department of Natural Resources Construction Permit No. 072002-011 authorized the increase of usage of coating material in the Aqueous Degreaser Tank (EU0040) and the Electro Deposition Paint Machine (EU0050).
 - a) There were no revisions made to this construction permit.

New Source Performance Standards (NSPS) Applicability

40 CFR Part 60, Subpart Dc, *Standards of performance for Small Industrial-Commercial-Institutional Steam Generating Units*

This rule does not apply to the two natural gas-fired boilers (EP-08 and EP-09) because they were constructed prior to the applicability date of June 9, 1989.

40 CFR Part 60 Subpart IIII, *Standards of Performance for Stationary Compression Ignition Internal Combustion Engines*

This rule does not apply to the fire pump engine (EP-20) because it was constructed prior to the applicability date.

None of the other NSPS standards applies.

Maximum Available Control Technology (MACT) Applicability

40 CFR Part 63 Subpart JJ, *National Emission Standards for Wood Furniture Manufacturing Operations*

This rule applies to the installation.

40 CFR Part 63 Subpart RRRR, *National Emission Standards for Hazardous Air Pollutants: Surface Coating of Metal Furniture*

This rule does not apply because the surface coating of metal components of wood furniture conducted in an operation that is subject to the wood furniture manufacturing standard Subpart JJ is exempt.

40 CFR Part 63 Subpart ZZZZ, *National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines*

This rule does not apply to the fire pump engine (EP-20) because it has a site rating of less than 500 horsepower.

40 CFR Part 63 Subpart DDDDD, *National Emission Standards for Hazardous Air Pollutants for Industrial, Commercial, and Institutional Boilers and Process Heaters*

This rule was vacated by the U.S. Court of Appeals for the District of Columbia on June 8, 2007. If the EPA promulgates an approved version of this rule in the future, the permittee should review the rule for applicability.

Note: As initially promulgated on September 13, 2004, this rule applied to the two natural gas-fired boilers (EP-08 and EP-09) because the units met the definition of an affected source. However, since the units met the definition of the subcategory “existing large gaseous fuel” units, they were subject to only the initial notification requirements in §63.9(b). That is, per §63.7506(b), they were not subject to the emission limits, work practice standards, performance testing, monitoring, SSMP, site-specific monitoring plans, recordkeeping and reporting requirements of this subpart or any other requirements in subpart A of part 63.

None of the other MACT standards applies.

National Emission Standards for Hazardous Air Pollutants (NESHAP) Applicability

In the permit application and according to Air Pollution Control Program records, there was no indication that any Missouri Air Conservation Law, Asbestos Abatement, 643.225 through 643.250; 10 CSR 10-6.080, Emission Standards for Hazardous Air Pollutants, Subpart M, National Standards for Asbestos; and 10 CSR 10-6.250, Asbestos Abatement Projects - Certification, Accreditation, and Business Exemption Requirements apply to this installation. The installation is subject to these regulations if they undertake any projects that deal with or involve any asbestos containing materials. None of the installation's operating projects underway at the time of this review deal with or involve asbestos containing material. Therefore, the above regulations were not cited in the operating permit. If the installation should undertake any construction or demolition projects in the future that deal with or involve any asbestos containing materials, the installation must follow all of the applicable requirements of the above rules related to that specific project.

None of the other NESHAP standards applies.

Compliance Assurance Monitoring (CAM) Applicability

40 CFR Part 64, *Compliance Assurance Monitoring (CAM)*

The CAM rule applies to each pollutant specific emission unit that:

- Is subject to an emission limitation or standard, and
- Uses a control device to achieve compliance, and
- Has pre-control emissions that exceed or are equivalent to the major source threshold.

Poly Adhesive Spray Booths 1, 2 and 3 (EU0010 through EU0030) are the only emission units that use a control device (filter) to achieve compliance with a relevant standard (10 CSR 10-6.400).

However, their uncontrolled PTE PM₁₀ is less than the major source threshold. Therefore, the CAM rule does not apply.

Other Regulatory Determinations

10 CSR 10-6.260, *Restriction of Emission of Sulfur Compounds*

This rule does not apply to the two natural gas boilers (EP-08 and EP-09) because according to paragraph (1)(A)2 of this rule, combustion equipment that uses exclusively pipeline grade natural gas as defined in 40 CFR 72.2 is exempt.

10 CSR 10-6.400, *Restriction of Emissions of Particulate Matter from Industrial Processes*

This rule applies to the Poly Adhesive Spray Booths (EU0010 through EU0030). The calculations below verify compliance with the PM Concentration limit provided that the each booth's filter is in operation and working properly:

Given:

The three spray booths (EU0010 through EU0030) are identical, each with an individual stack
 Process limitations restrict spraying operations to 25% of time

Spray gun transfer rate: 10 fl oz/min

Spray gun minimum transfer efficiency: 65%

Adhesive density: 7.895 lb/gal

Adhesive percent solids: 59%

Filter overall PM control efficiency: 70%

Stack flow rate (per stack): 10,000 acfm

Stack temperature: 77 degrees F

Potential PM Emission Rate (PTE)

$$PTE = (MHDR) \times (Density) \times (\% \text{ Solids}/100) \times (1 - \text{Transfer Eff}/100) \times (1 - \text{Control Eff}/100)$$

Where: MHDR = (10 fl oz/min) x (gal/128 fl oz) x (60 min/hr) x (25% activity) = 1.17 gal/hr

$$PTE = (1.17 \text{ gal/hr}) \times (7.895 \text{ lb/gal}) \times (0.59) \times (1 - 0.65) \times (1 - 0.70) = 0.57 \text{ lb/hr}$$

Allowable PM Emission Rate (E) [10 CSR 10-6.400(3)(A)1]

$$\text{Emission Rate Limit (lb/hr) } E = 4.1(P)^{0.67}$$

Where: P = process weight rate (ton/hr)

$$P = (1.17 \text{ gal/hr}) \times (7.895 \text{ lb/gal}) \times (\text{ton}/2000 \text{ lb}) = 0.0046 \text{ ton/hr}$$

$$E = 4.1 \times (0.0046)^{0.67} = 0.11 \text{ lb/hr.}$$

0.11 lb/hr < 0.57 lb/hr, therefore, emission units do not meet the PM emission rate limit.

Potential PM Concentration (gr/scf)

$$\text{PM Concentration} = \text{Emission Rate (lb/hr)} \times (7,000 \text{ grains/lb}) / \text{Stack flow rate (scfm)} / (60 \text{ min/hr})$$

Flow rates converted from actual to standard conditions using the ideal gas law.

$$\text{SCFM} = 10,000 \text{ acfm} \times (530 / (460 + 77)) = 9,870 \text{ scfm}$$

$$\text{PM Conc.} = (0.57 \text{ lb/hr}) \times (7,000 \text{ grains/lb}) / (9,870 \text{ scfm}) / (60 \text{ min/hr}) = 0.007 \text{ gr/scf}$$

Allowable PM Concentration (gr/dscf) [10 CSR 10-6.400(3)(A)2]

According to Table 1 of this rule, at a source gas volume of 10,000 scfm, the reduction of PM concentration shall not be required below 0.089 gr/scf. Since 0.007 gr/scf < 0.089 gr/scf, the emission units are in compliance

Historical Notes: The following table describes the differences between the initial Operating Permit, OP2001020, and this renewal Operating Permit.

OP2001020 EU ID #	Description	Status
EU0010	Ten (10) Poly Adhesive Spray Booths	<ul style="list-style-type: none"> There are currently only three adhesive spray booths at the installation. Current EU ID numbers: EU0010, EU0020 and EU0030

OP2001020 EU ID #	Description	Status
EU0020	Aqueous Degreaser Tank	<ul style="list-style-type: none"> • Conditions based on Construction Permit No. 11993-009 were superseded by Construction Permit No. 072002-014 and therefore are not included. • Current EU ID numbers: EU0040 and EU0050
EU0030	Electro Deposition Paint Machine	
EU0040	Sawdust Collection System	<ul style="list-style-type: none"> • Permanently shut down in 2003
EU0050	Seven (7) Wood Finishing Paint Booths/ six (6) Electric Drying Ovens	<ul style="list-style-type: none"> • Permanently shut down in 2005
EU0060	Wood Fired Boiler	<ul style="list-style-type: none"> • Permanently shut down in 2002
NA	Six Space Heaters, 6.29 MMBtu/hr, pipeline natural gas, prior to 1985	<ul style="list-style-type: none"> • Permanently shut down
NA	Three (3) Adhesive Storage Tanks, 3,000-gallons each	<ul style="list-style-type: none"> • Permanently shut down
NA	Eight (8) Wood Drying Kilns, Steam Heated	<ul style="list-style-type: none"> • Permanently shut down
NA	Heat Shrink Oven, 1.2 MMBtu/hr, pipeline natural gas	<ul style="list-style-type: none"> • Permanently shut down

Other Regulations Not Cited in the Operating Permit or the Above Statement of Basis

Any regulation which is not specifically listed in either the Operating Permit or in the above Statement of Basis does not appear, based on this review, to be an applicable requirement for this installation for one or more of the following reasons:

1. The specific pollutant regulated by that rule is not emitted by the installation;
2. The installation is not in the source category regulated by that rule;
3. The installation is not in the county or specific area that is regulated under the authority of that rule;
4. The installation does not contain the type of emission unit which is regulated by that rule;
5. The rule is only for administrative purposes.

Should a later determination conclude that the installation is subject to one or more of the regulations cited in this Statement of Basis or other regulations which were not cited, the installation shall determine and demonstrate, to the Air Pollution Control Program's satisfaction, the installation's compliance with that regulation(s). If the installation is not in compliance with a regulation which was not previously cited, the installation shall submit to the Air Pollution Control Program a schedule for achieving compliance for that regulation(s).

Prepared by:

Tandi Edelman
 Environmental Engineer