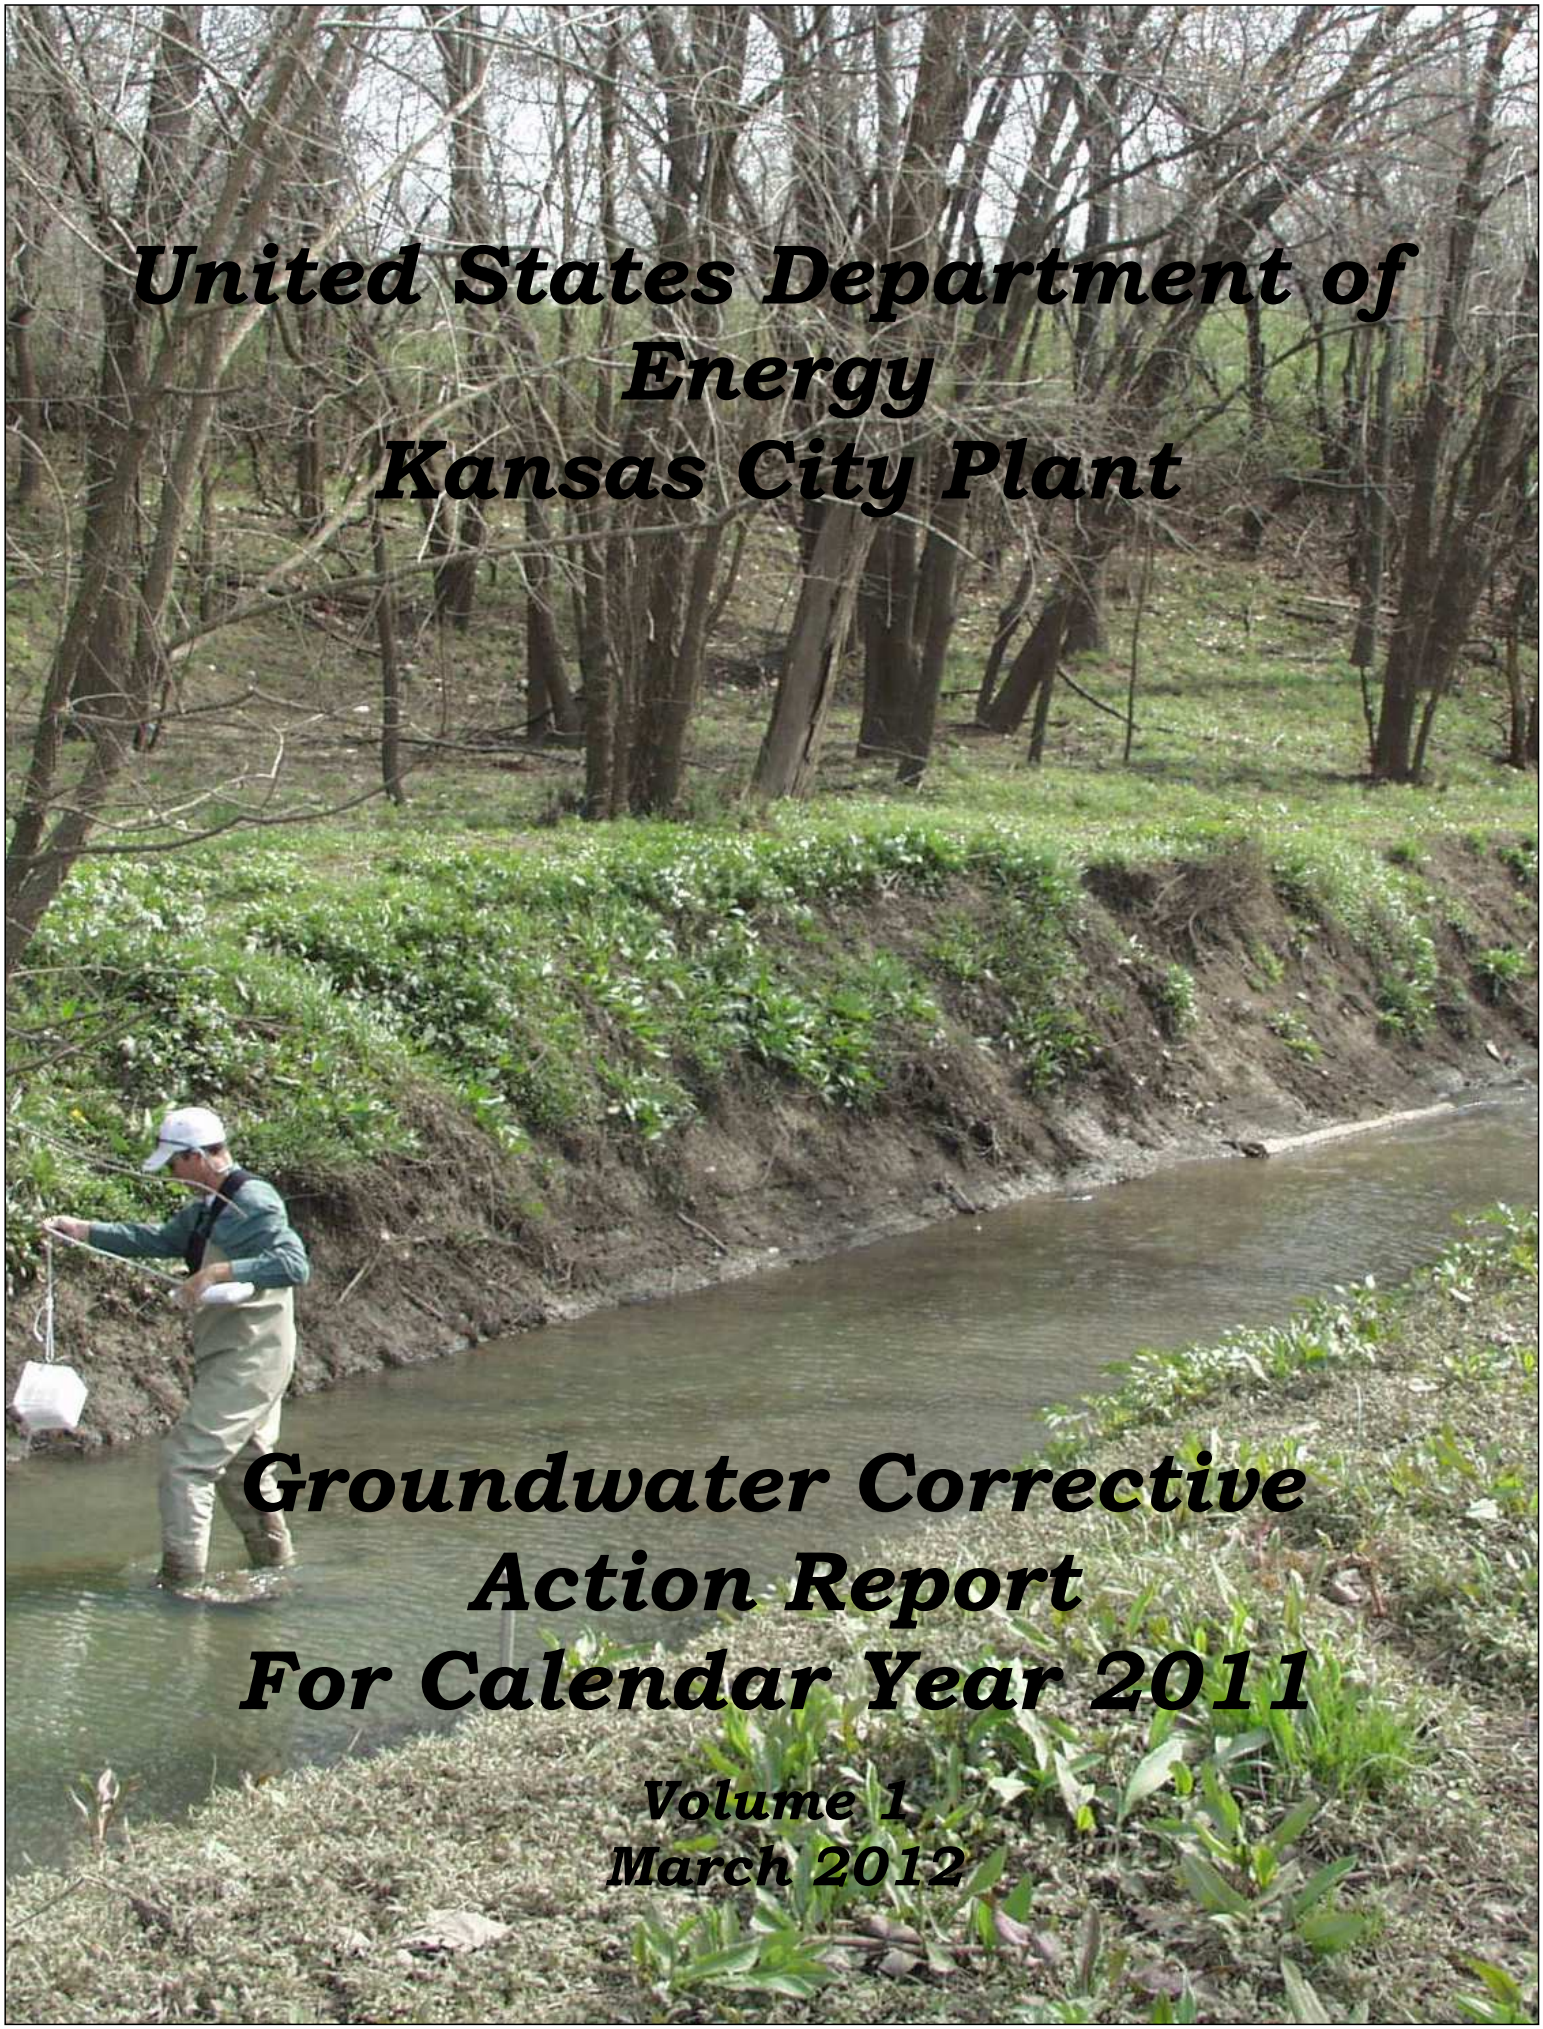

United States Department of Energy
Kansas City Plant

Groundwater Corrective Action Report For Calendar Year 2011

Volume 1
March 2012

Table of Contents

1.0 Introduction 1-1

1.1 Report Organization 1-2

1.2 2011 RCRA Class 3 Permit Modification Request 1-3

1.3 Site Background/Evolution of Groundwater Monitoring Program 1-3

1.4 Site Characteristics 1-7

1.4.1 Alluvial Hydrostratigraphy and Geology 1-7

1.4.2 Bedrock Stratigraphy and Geology 1-7

1.4.3 Hydraulic Properties, Alluvium 1-10

1.4.4 Hydraulic Properties, Bedrock 1-10

1.5 Subsurface Contaminant Nature and Migration 1-10

1.5.1 Conceptual Site model 1-11

1.5.2 Fit of the model to the KCP 1-12

1.5.3 The Role of Natural Attenuation 1-12

2.0 BLUE RIVER GROUNDWATER FLOW SYSTEM 2-1

2.1 Description of Area 2-1

2.2. Alluvial Stratigraphy 2-1

2.3 Monitoring Wells 2-4

2.4 Work Performed in 2011 2-4

2.5 Groundwater Flow Directions 2-5

2.5.1 BRGFS Upper Completion Water Levels 2-5

2.5.2 BRGFS Lower Completion Water Levels 2-8

2.6 Groundwater Flow Rates 2-10

2.7 Groundwater Contamination 2-11

2.7.1 Source Areas 2-11

2.7.2 Contaminant Distribution and Extent 2-12

2.7.2.1 TCE, Upper Completion Wells 2-12

2.7.2.2 TCE, Lower Completion Wells 2-13

2.7.2.3 1,2-DCE, Upper Completion Wells 2-13

2.7.2.4 1,2-DCE, Lower Completion Wells 2-14

2.7.2.5 Vinyl chloride, Upper Completion Wells 2-19

2.7.2.6 Vinyl chloride, Lower Completion Wells 2-19
2.7.2.7 1, 1 Dichloroethene, Upper Completion Wells 2-20
2.7.2.8 1,1 Dichloroethene, Lower Completion Wells 2-20
2.7.2.9 1,1-Dichloroethane, Upper Completion Wells 2-20
2.7.2.10 1,1 Dichloroethane, Lower Completion Wells 2-21
2.8 Summary 2-21

3.0 INDIAN CREEK GROUNDWATER FLOW SYSTEM 3-1
3.1 Description of Area 3-1
3.2. Alluvial Stratigraphy 3-1
3.3 Monitoring Wells 3-1
3.4 Work Performed in 2011 3-4
3.5 Groundwater Flow Directions 3-4
3.5.1 ICGFS Upper Completion Water Levels 3-4
3.5.2 ICGFS Lower Completion Water Levels 3-6
3.5.3 Groundwater Flow Rates 3-9
3.5.4 Contaminant Transport Rates 3-10
3.6 Groundwater Contamination 3-11
3.6.1 Source Areas 3-11
3.6.2 Contaminant Distribution and Extent 3-11
3.6.2.1 TCE, Upper Completion Wells 3-12
3.6.2.2 TCE, Lower Completion Wells 3-13
3.6.2.3 1,2-DCE, Upper Completion Wells 3-16
3.6.2.4 1,2-DCE, Lower Completion Wells 3-16
3.6.2.5 Vinyl chloride, Upper Completion Wells 3-20
3.6.2.6 Vinyl chloride, Lower Completion Wells 3-20
3.6.2.7. 1,1-Dichlorethene Upper Completion Wells 3-23
3.6.2.8 1,1-Dichloroethene Lower Completion Wells 3-23
3.6.2.9 1,1-Dichloroethane Upper Completion Wells 3-24
3.6.2.10 1,1-Dichloroethane Lower Completion Wells 3-24
3.6.2.11 PCB's Upper Completion Wells 3-25
3.6.2.12 PCBs Lower Completion Wells 3-25

4.0 Operational Effectiveness and Maintenance Activities for the KCP Groundwater Corrective Action Program 4-1
4.1 Introduction 4-1
4.2 Compliance Point Wells 4-1
4.3 Effectiveness and Perimeter Wells 4-2
4.4 Monitoring Well Inspection and Maintenance Conducted In 2011 4-3
4.5 Locations Exceeding Site Clean Up Standards 4-4
4.6 Groundwater Pump and Treat System 4-6
4.6.1 Groundwater Pumping Well Operation and Maintenance 4-6
4.6.2 Groundwater Treatment System Operation and Maintenance 4-6
4.7 Effectiveness of Groundwater Pumping System 4-8
4.7.1 Mass Removal 4-8
4.7.2 Effect of Pumping System on Contaminant Movement 4-10
4.8 Work Performed in 2011 4-30
4.8.1 Groundwater Treatment Technology Evaluation 4-30

5.0 2011 Surface Water Monitoring 5-1
5.1 Outfalls / Receiving Streams 5-1
5.2 VOCs 5-5
5.3 PCBs 5-7
5.3.a Outfall 001 5-8
5.3.b Outfall 002 5-8
5.3.c. Outfall 003 5-21
5.3.d PCB Sampling by Method 1668 5-23

6.0 REFERENCES 6-1

APPENDICES

APPENDIX A PLATES
APPENDIX B QUALITY ASSURANCE REVIEWS OF 2011 GROUNDWATER DATA
APPENDIX C GROUNDWATER TREATMENT SYSTEM VOC/PCB SUMMARY TABLES
APPENDIX D OUTFALL 002 ANNUAL DATA SUMMARY
APPENDIX E FILTRA SYSTEMS STIR PILOT STUDY REPORT
APPENDIX F PILOT STUDY OF VOC EATER TECHNOLOGY

FIGURES

1.1 Location of the Bannister Federal Complex in the Kansas City Area..... 1-4
1.2 Release Site Map..... 1-6
1.3 Groundwater Collection System Source Locations..... 1-8
1.4 Bedrock Stratigraphy..... 1-9
1.5 Bedrock at the KCP..... 1-13
1.6 DNAPL in Residual Saturation in Relatively Fine Grained Systems..... 1-14
1.7 Conceptualized Distribution of DNAPL in a Homogeneous Fine Grained System..... 1-15

2.1 Blue River Flow System..... 2-2
2.2 Area of Former Blue River Channel in the Northeast Area..... 2-3
2.3 Blue River Flow System Upper Completion Potentiometric Surface Map, Fall 2011..... 2-6
2.4 Blue River Flow System Lower Completion Potentiometric Surface Map, Fall 2011..... 2-7
2.5 Potentiometric Surface of the Outfall 001 Area..... 2-9
2.6 Blue River Flow System Upper Completion TCE Contamination , Fall 2011..... 2-15
2.7. Blue River Flow System Lower Completion TCE Contamination, Fall 2011..... 2-16
2.8 Blue River Flow System Upper Completion 1,2-DCE Contamination, Fall 2011..... 2-17
2.9 Blue River Flow System Lower Completion, 1,2-DCE Contamination, Fall 2011..... 2-18
2.10 Blue River Flow System Upper Completion Vinyl chloride Contamination, Fall 2011..... 2-22
2.11 Blue River Flow System Lower Completion Vinyl chloride Contamination, Fall 2011..... 2-23
2-12 Blue River Flow System Upper Completion 1,1-DCE Contamination, Fall 2011..... 2-24
2-13 Blue River Flow System Lower Completion 1,1-DCE Contamination, Fall 2011..... 2-25

2-14 Blue River Flow System Upper Completion 1,1-DCA Contamination, Fall 2011 2-26
2-15 Blue River Flow System Lower Completion 1,1-DCA Contamination, Fall 2011 2-27

3.1 Indian Creek Groundwater Flow System 3-2
3.2 Alluvial Stratigraphy in the TCE Still Area 3-3
3.3 Indian Creek Flow System Upper Completion Potentiometric Surface, Fall 2011 3-7
3.4 Indian Creek Flow System Lower Completion Potentiometric Surface, Fall 2011 3-8
3.5 Indian Creek Flow System Upper Completion TCE Contamination, Fall 2011 3-14
3.6 Indian Creek Flow System Lower Completion TCE Contamination, Fall 2011 3-15
3.7 Indian Creek Flow System Upper Completion 1, 2-DCE Contamination, Fall 2011 3-18
3.8 Indian Creek Flow System Lower Completion 1, 2-DCE Contamination, Fall 2011 3-19
3.9 Indian Creek Flow System Upper Completion Vinyl chloride Contamination, Fall 2011 3-21
3.10 Indian Creek Flow System Lower Completion Vinyl chloride Contamination, Fall 2011 3-22
3.11 Indian Creek Flow System Upper Completion 1,1-DCE Contamination Fall 2011 3-26
3.12 Indian Creek Flow System Lower Completion 1,1-DCE Contamination Fall 2011 3-27
3.13 Indian Creek Flow System Upper Completion 1,1-DCA Contamination Fall 2011 3-28
3.14 Indian Creek Flow System Lower Completion 1,1-DCA Contamination Fall 2011 3-29

4.1 Remaining Footing Tile Drain Sumps Routed to Groundwater Treatment System..... 4-11
4.2 Groundwater Treatment System (Gallons pumped/ VOCs Removed)..... 4-12
4.3 Northeast Area Wells Sampled in January 2012…… 4-22

5.1 NPDES Monitoring Program Sample Locations..... 5-2
5.2 Outfall 002 PCB's..... 5-10
5.3 Location of Outfall 002 Diversion System..... 5-13
5.4.a. Outfall 002 Raceway Looking Towards Flap Gate Prior to Restriction Installation..... 5-16
5.4.b Outfall 002 Raceway With Access Restriction Installed Looking Toward Flap Gate..... 5-16
5.4.c Outfall 002 Raceway Looking Towards Indian Creek..... 5-17
5.5 Outfall 002 PCB Trend Graph..... 5-19
5.6 Outfall 002 Aqueous PCB Mass..... 5-20
5.7 Outfall 003 System…….. 5-22
5.8 Outfall 003 PCB Trend Graph……. 5-22

TABLES

2.1 Blue River Flow System Water Level Elevations..... 2-28
2.2 Blue River Groundwater Flow System Contaminant Hits..... 2-31

3.1 Indian Creek Flow System Water Level Elevations..... 3-30
3.2 Indian Creek Flow System Contaminant Hits..... 3-33

4.1 Perimeter Wells at the DOE Kansas City Plant..... 4-2
4.2 Effectiveness Wells at the DOE Kansas City Plant..... 4-2
4.3 Pumping Well Maintenance Performed in 2011..... 4-7
4.4 Dissolved Contaminant Mass 2000 vs. 2011..... 4-9
4.5 Blue River Flow System Groundwater Pumping Well Flows (Gallons)..... 4-14
4.6 Indian Creek Flow System Groundwater Pumping Well Flows (Gallons)..... 4-15
4.7 Groundwater Footing Tile Drain and Collection Sump Flows (Gallons)..... 4-16
4.8 Blue River Flow System Contaminants Over Site Clean Up Standards..... 4-17
4.9 Indian Creek Flow System Contaminants Over Site Clean Up Standards..... 4-19
4.10 Results from January 2012 Special Sampling…… 4-24

5.1 Surface Water Sampling Results..... 5-3
5.2 VOC Sample Results – Outfalls 001, 002, 003, and 004..... 5-5
5.3 Outfall 002 PCBs..... 5-11
5.4 Outfall 002 Sediment Sample Results…… 5-15
5.5 Method 1668a Total PCB Sample Results (ng/L)..... 5-25
5.6 May 2011 Method 1668 Surface Water Sampling Results..... 5-26
5.7 May 2011 Method 1668 Surface Water Sampling Results
Weight Percent Congener Composition..... 5-33
5.8 October 2011 Method 1668 Surface Water Sampling Results..... 5-41
5.9 October 2011 Method 1668 Surface Water Sampling Results…….. 5-48
5.10 Indian Creek Sediment Sample Results Near Outfall 002 (mg/kg)..... 5-55
5.11 Child and Adult Recreational Receptor Dermal/Ingestion Exposure
Pathway HI Summaries for PCBs in Streambed Sediments..... 5-56