

STATE OF MISSOURI
DEPARTMENT OF NATURAL RESOURCES

MISSOURI CLEAN WATER COMMISSION



MISSOURI STATE OPERATING PERMIT

In compliance with the Missouri Clean Water Law, (Chapter 644 R.S. Mo. as amended, hereinafter, the Law), and the Federal Water Pollution Control Act (Public Law 92-500, 92nd Congress) as amended,

Permit No. MO-0134830

Owner: City of Springfield
Address: 840 Boonville, Springfield, MO 65802

Continuing Authority: Springfield-Branson National Airport
Address: 2300 N. Airport Boulevard, Springfield, MO 65802

Facility Name: Springfield-Branson National Airport
Facility Address: 2300 N. Airport Boulevard, Springfield, MO 65802

Legal Description: See page two
UTM Coordinates: See page two

Receiving Stream: Unnamed tributary to Rainer Branch (U) and Sinkholes
First Classified Stream and ID: Clear Creek (P)(1409)
USGS Basin & Sub-watershed No.: (10290106-0204)

is authorized to discharge from the facility described herein, in accordance with the effluent limitations and monitoring requirements as set forth herein:

FACILITY DESCRIPTION

See page two

This permit authorizes only wastewater discharges under the Missouri Clean Water Law and the National Pollutant Discharge Elimination System; it does not apply to other regulated areas. This permit may be appealed in accordance with Sections 640.013, 621.250, and 644.051.6 of the Law.

July 1, 2014
Effective Date

Sara Parker Pauley, Director, Department of Natural Resources

June 30, 2019
Expiration Date

John Madras, Director, Water Protection Program

FACILITY DESCRIPTION (continued):

Operating and maintaining an airport including servicing, repairing, maintaining, and storing aircraft and in furnishing coordinated handling services for air freight and passengers.

Outfall #001 – stormwater runoff from deicing, washing, and minor maintenance areas

Design flow is dependent upon precipitation.

Maximum flow is 4.3 MGD.

Legal Description: SE ¼, SW ¼, Sec. 1, T29N, R23W, Greene County

UTM Coordinates: X = 465009, Y = 4122278

Receiving Stream: Unnamed tributary to Rainer Creek (U)

Outfall #002 – stormwater runoff from deicing, washing, and minor maintenance areas

Design flow is dependent upon precipitation.

Maximum flow is 2.9 MGD.

Legal Description: NW ¼, NE ¼, Sec. 12, T29N, R23W, Greene County

UTM Coordinates: X = 465333, Y = 4121424

Receiving Stream: Unnamed tributary to Rainer Creek (U)

Outfall #003 – stormwater runoff from deicing, washing, and minor maintenance areas

Design flow is dependent upon precipitation.

Maximum flow is 4.4 MGD.

Legal Description: NW ¼, SW ¼, Sec. 06, T29N, R23W, Greene County

UTM Coordinates: X = 465333, Y = 4121424

Receiving Stream: sinkhole

Outfall #004 – stormwater runoff from deicing, washing, and minor maintenance areas

Design flow is dependent upon precipitation.

Maximum flow is 3.5 MGD.

Legal Description: NE ¼, SW ¼, Sec. 06, T29N, R23W, Greene County

UTM Coordinates: X = 466428, Y = 4123023

Receiving Stream: sinkhole

Outfall #005 – stormwater runoff from fueling area

Design flow is dependent upon precipitation.

Maximum flow is 0.65 MGD.

Legal Description: NE ¼, SW ¼, Sec. 06, T29N, R23W, Greene County

UTM Coordinates: X = 466621, Y = 4123080

Receiving Stream: Unnamed tributary to Rainer Creek (U)

Outfall #006 – stormwater runoff from fueling area

Design flow is dependent upon precipitation.

Maximum flow is 0.01 MGD.

Legal Description: NW ¼, NW ¼, Sec. 12, T29N, R23W, Greene County

UTM Coordinates: X = 464289, Y = 4121792

Receiving Stream: sinkhole

A. EFFLUENT LIMITATIONS AND MONITORING REQUIREMENTS

PAGE NUMBER 3 of 7

PERMIT NUMBER MO-0134830

The permittee is authorized to discharge from outfall(s) with serial number(s) as specified in the application for this permit. The final effluent limitations shall become effective **July 1, 2014**, and remain in effect until expiration of the permit. Such discharges shall be controlled, limited and monitored by the permittee as specified below:

OUTFALL NUMBER AND EFFLUENT PARAMETER(S)	UNITS	FINAL EFFLUENT LIMITATIONS			MONITORING REQUIREMENTS	
		DAILY MAXIMUM	WEEKLY AVERAGE	MONTHLY AVERAGE	MEASUREMENT FREQUENCY	SAMPLE TYPE
<u>Outfalls #001, #002, #003 and #004****</u>						
Flow	MGD	*			once/quarter****	24 hr. estimate
Chemical Oxygen Demand	mg/L	*			once/quarter****	grab
Total Suspended Solids	mg/L	*			once/quarter****	grab
pH	SU	**			once/quarter****	grab
Oil & Grease	mg/L	10			once/quarter****	grab
Benzene	µg/L	5			once/quarter****	grab
Toluene	µg/L	1,000			once/quarter****	grab
Ethylbenzene	µg/L	320			once/quarter****	grab
Xylene	µg/L	10,000			once/quarter****	grab
Ammonia as N	mg/L	*			once/quarter****	grab
Chloride as Cl	mg/L	*			once/quarter****	grab
Nitrate as NO ₃	mg/L	*			once/quarter****	grab
Propylene Glycol	mg/L	*			once/quarter****	grab
Precipitation (Outfall #001 only)	Inches	*			once/quarter****	record

MONITORING REPORTS SHALL BE SUBMITTED QUARTERLY; THE FIRST REPORT IS DUE OCTOBER 28, 2014. THERE SHALL BE NO DISCHARGE OF FLOATING SOLIDS OR VISIBLE FOAM IN OTHER THAN TRACE AMOUNTS.

A. EFFLUENT LIMITATIONS AND MONITORING REQUIREMENTS				PAGE NUMBER 4 of 6		
				PERMIT NUMBER MO-0134830		
The permittee is authorized to discharge from outfall(s) with serial number(s) as specified in the application for this permit. The final effluent limitations shall become effective July 1, 2014 , and remain in effect until expiration of the permit. Such discharges shall be controlled, limited and monitored by the permittee as specified below:						
OUTFALL NUMBER AND EFFLUENT PARAMETER(S)	UNITS	FINAL EFFLUENT LIMITATIONS			MONITORING REQUIREMENTS	
		DAILY MAXIMUM	WEEKLY AVERAGE	MONTHLY AVERAGE	MEASUREMENT FREQUENCY	SAMPLE TYPE
<u>Outfalls #005 & #006****</u>						
Flow	MGD	*			once/quarter***	24 hr. estimate
Total Suspended Solids	mg/L	*			once/quarter***	grab
Chemical Oxygen Demand	mg/L	*			once/quarter***	grab
pH	SU	**			once/quarter***	grab
Oil & Grease	mg/L	10			once/quarter***	grab
Benzene	µg/L	5			once/quarter***	grab
Toluene	µg/L	1,000			once/quarter***	grab
Ethylbenzene	µg/L	320			once/quarter***	grab
Xylene	µg/L	10,000			once/quarter***	grab
MONITORING REPORTS SHALL BE SUBMITTED <u>QUARTERLY</u> ; THE FIRST REPORT IS DUE <u>OCTOBER 28, 2014</u> . THERE SHALL BE NO DISCHARGE OF FLOATING SOLIDS OR VISIBLE FOAM IN OTHER THAN TRACE AMOUNTS.						

- * Monitoring requirement only.
- ** pH is measured in pH units and is not to be averaged. The pH is limited to the range of 6.5-9.0 pH units.
- *** See table below for quarterly sampling.

Minimum Sampling Requirements			
Quarter	Months	Effluent Parameters	Report is Due
First	January, February, March	Sample at least once during any month of the quarter	April 28 th
Second	April, May, June	Sample at least once during any month of the quarter	July 28 th
Third	July, August, September	Sample at least once during any month of the quarter	October 28 th
Fourth	October, November, December	Sample at least once during any month of the quarter	January 28 th

**** All samples shall be collected from a discharge resulting from a precipitation event greater than 0.1 inches in magnitude and that occurs at least 72 hours from the previously measurable precipitation event. If a precipitation event does not occur within the reporting period, report as **no discharge**.

B. STANDARD CONDITIONS

In addition to specified conditions stated herein, this permit is subject to the attached Part I standard conditions dated November 1, 2013, and hereby incorporated as though fully set forth herein.

C. SPECIAL CONDITIONS

1. This permit may be reopened and modified, or alternatively revoked and reissued, to:
 - (a) Comply with any applicable effluent standard or limitation issued or approved under Sections 301(b)(2)(C) and (D), 304(b)(2), and 307(a) (2) of the Clean Water Act, if the effluent standard or limitation so issued or approved:
 - (1) contains different conditions or is otherwise more stringent than any effluent limitation in the permit; or
 - (2) controls any pollutant not limited in the permit.
 - (b) Incorporate new or modified effluent limitations or other conditions, if the result of a waste load allocation study, toxicity test or other information indicates changes are necessary to assure compliance with Missouri's Water Quality Standards.

C. SPECIAL CONDITIONS continued

- (c) Incorporate new or modified effluent limitations or other conditions if, as the result of a watershed analysis, a Total Maximum Daily Load (TMDL) limitation is developed for the receiving waters which are currently included in Missouri's list of waters of the state not fully achieving the state's water quality standards, also called the 303(d) list.

The permit as modified or reissued under this paragraph shall also contain any other requirements of the Clean Water Act then applicable.

2. All outfalls must be clearly marked in the field.
3. Report as no-discharge when a discharge does not occur during the report period.
4. It is a violation of the Missouri Clean Water Law to fail to pay fees associated with this permit (644.055 RSMo).
5. Water Quality Standards
 - (a) To the extent required by law, discharges to waters of the state shall not cause a violation of water quality standards rule under 10 CSR 20-7.031, including both specific and general criteria.
 - (b) General Criteria. The following general water quality criteria shall be applicable to all waters of the state at all times including mixing zones. No water contaminant, by itself or in combination with other substances, shall prevent the waters of the state from meeting the following conditions:
 - (1) Waters shall be free from substances in sufficient amounts to cause the formation of putrescent, unsightly or harmful bottom deposits or prevent full maintenance of beneficial uses;
 - (2) Waters shall be free from oil, scum and floating debris in sufficient amounts to be unsightly or prevent full maintenance of beneficial uses;
 - (3) Waters shall be free from substances in sufficient amounts to cause unsightly color or turbidity, offensive odor or prevent full maintenance of beneficial uses;
 - (4) Waters shall be free from substances or conditions in sufficient amounts to result in toxicity to human, animal or aquatic life;
 - (5) There shall be no significant human health hazard from incidental contact with the water;
 - (6) There shall be no acute toxicity to livestock or wildlife watering;
 - (7) Waters shall be free from physical, chemical or hydrologic changes that would impair the natural biological community;
 - (8) Waters shall be free from used tires, car bodies, appliances, demolition debris, used vehicles or equipment and solid waste as defined in Missouri's Solid Waste Law, section 260.200, RSMo, except as the use of such materials is specifically permitted pursuant to section 260.200-260.247.
6. Changes in Discharges of Toxic Substances

The permittee shall notify the Director as soon as it knows or has reason to believe:

- (a) That any activity has occurred or will occur which would result in the discharge of any toxic pollutant which is not limited in the permit, if that discharge will exceed the highest of the following "notification levels:"
 - (1) One hundred micrograms per liter (100 µg/L);
 - (2) Two hundred micrograms per liter (200 µg/L) for acrolein and acrylonitrile; five hundred micrograms per liter (500 µg/L) for 2,5 dinitrophenol and for 2-methyl-4, 6-dinitrophenol; and one milligram per liter (1 mg/L) for antimony;
 - (3) Five (5) times the maximum concentration value reported for the pollutant in the permit application;
 - (4) The level established in Part A of the permit by the Director.
 - (b) That they have begun or expect to begin to use or manufacture as an intermediate or final product or byproduct any toxic pollutant, which was not reported in the permit application.
7. Any pesticide discharge from any point source shall comply with the requirements of Federal Insecticide, Fungicide and Rodenticide Act, as amended (7 U.S.C. 136 et. seq.) and the use of such pesticides shall be in a manner consistent with its label.
 8. The permittee shall implement a Stormwater Pollution Prevention Plan (SWPPP). The SWPPP must be prepared and implemented upon permit issuance. The SWPPP must be kept on-site and should not be sent to the department unless specifically requested. The SWPPP must be reviewed and updated, if needed, every five (5) years or as site conditions change. The permittee shall select, install, use, operate, and maintain the Best Management Practices prescribed in the SWPPP in accordance with the concepts and methods described in the following document:

C. SPECIAL CONDITIONS continued

Developing Your Stormwater Pollution Prevention Plan, A Guide for Industrial Operators, (Document number EPA 833-B-09-002) published by the United States Environmental Protection Agency (USEPA) in February 2009.

The SWPPP must include the following:

- (a) A listing of specific Best Management Practices (BMPs) and a narrative explaining how BMPs will be implemented to control and minimize the amount of potential contaminants that may enter stormwater.
 - (b) The SWPPP must include a schedule for twice per month site inspections and brief written reports. The inspections must include observation and evaluation of BMP effectiveness. Deficiencies must be corrected within seven (7) days and the actions taken to correct the deficiencies shall be included with the written report, including photographs. Any corrective measure that necessitates major construction may also need a construction permit. Inspection reports must be kept on site with the SWPPP and maintained for a period of five (5) years. These must be made available to department personnel upon request.
 - (c) A provision for designating an individual to be responsible for environmental matters.
 - (d) A provision for providing training to all personnel involved in material handling and storage, and housekeeping of maintenance and cleaning areas. Proof of training shall be submitted on request of the department.
9. Permittee shall adhere to the following minimum Best Management Practices:
- (a) Prevent the spillage or loss of fluids, oil, grease, fuel, etc. from vehicle maintenance, equipment cleaning, or warehouse activities and thereby prevent the contamination of storm water from these substances.
 - (b) Provide collection facilities and arrange for proper disposal of waste products including but not limited to petroleum waste products, and solvents.
 - (c) Store all paint, solvents, petroleum products and petroleum waste products (except fuels), and storage containers (such as drums, cans, or cartons) so that these materials are not exposed to storm water or provide other prescribed BMP's such as plastic lids and/or portable spill pans to prevent the commingling of storm water with container contents. Commingled water may not be discharged under this permit. Provide spill prevention control, and/or management sufficient to prevent any spills of these pollutants from entering waters of the state. Any containment system used to implement this requirement shall be constructed of materials compatible with the substances contained and shall also prevent the contamination of groundwater.
 - (d) Provide good housekeeping practices on the site to keep trash from entry into waters of the state.
 - (e) Provide sediment and erosion control sufficient to prevent or control sediment loss off of the property. This could include the use of straw bales, silt fences, or sediment basins, if needed, to comply with effluent limits.
10. The purpose of the SWPPP and the BMPs listed herein is the prevention of pollution of waters of the state. A deficiency of a BMP means it was not effective in preventing pollution [10 CSR 20-2.010(56)] of waters of the state, and corrective actions means the facility took steps to eliminate the deficiency.
11. Before releasing water that has accumulated in secondary containment areas it must be examined for hydrocarbon odor and presence of sheen. When the presence of hydrocarbons is indicated, and at a minimum of once/quarter, this water must be tested for Total Petroleum Hydrocarbons (TPH). The suggested analytical method for testing TPH is non-Halogenated Organic by Gas Chromatography method 8015 (also known as OA1 and OA2). However, if the permittee so desires to use other approved testing methods (i.e. EPA 1664), they may do so. If the concentration for TPH exceeds 10 mg/L, the water shall be taken to a WWTP for treatment.
12. Release of a hazardous substance must be reported to the department in accordance with 10 CSR 24-3.010. A record of each reportable spill shall be retained with the SWPPP and made available to the department upon request.
13. Benchmarks
 The following benchmarks are considered necessary to protect existing water quality and should not be exceeded during discharges resulting from a precipitation event exceeding 0.1 inches during a 24-hour period. The BMPs at the facility should be designed to meet the benchmarks during rainfall events up to the 10-year, 24-hour rain event. The benchmarks do not constitute numeric effluent limitations. **Benchmark exceedances alone, therefore, are not a permit violation.** If a sample exceeds a benchmark value a review of the facilities SWPPP and BMPs shall take place to determine whether corrective action is needed to reduce that pollutant in the stormwater discharge. This evaluation must be kept on file with the SWPPP. Failure to evaluate and improve BMPs to address benchmark exceedances is a permit violation.

BENCHMARK TABLE: OUTFALLS #001 THROUGH #006

Parameter	Benchmark Limits
Total Suspended Solids	100 mg/L
Chemical Oxygen Demand	100 mg/L

Missouri Department of Natural Resources
FACT SHEET
FOR THE PURPOSE OF RENEWAL
OF
MO-0134830
SPRINGFIELD-BRANSON NATIONAL AIRPORT

The Federal Water Pollution Control Act ("Clean Water Act" Section 402 Public Law 92-500 as amended) established the National Pollution Discharge Elimination System (NPDES) permit program. This program regulates the discharge of pollutants from point sources into the waters of the United States, and the release of storm water from certain point sources. All such discharges are unlawful without a permit (Section 301 of the "Clean Water Act"). After a permit is obtained, a discharge not in compliance with all permit terms and conditions is unlawful. Missouri State Operating Permits (MSOPs) are issued by the Director of the Missouri Department of Natural Resources (Department) under an approved program, operating in accordance with federal and state laws (Federal "Clean Water Act" and "Missouri Clean Water Law" Section 644 as amended). MSOPs are issued for a period of five (5) years unless otherwise specified.

As per [40 CFR Part 124.8(a)] and [10 CSR 20-6.020(1)2.] a Factsheet shall be prepared to give pertinent information regarding the applicable regulations, rationale for the development of effluent limitations and conditions, and the public participation process for the Missouri State Operating Permit (operating permit) listed below.

A Factsheet is not an enforceable part of an operating permit.

This Factsheet is for an Industrial Facility.

Part I – Facility Information

Facility Type: Industrial
Facility SIC Code(s): 4581

Facility Description:

The Springfield-Branson National Airport is an airport that utilizes Type I and Type IV de-icing and anti-icing fluids and has a total of 22 aboveground storage tanks (AST) containing various petroleum products with a combined total volume of 259,660 gallons.

The midfield terminal tank farm contained gasoline, diesel, jet fuel, propylene glycol AST's and several 250 gallon totes of Type IV de-icer. The fueling area showed no signs of excessive staining. This tank farm utilizes an oil/water separator and stormwater would discharge through Outfall #002.

The General Aviation tank farm oil/water separator discharges into this basin which then has a valved outlet. The discharge from this basin needs to be added to the MSOP as a permitted outfall. Stormwater would eventually flow into the same sinkhole as Outfall #004, but enters downstream of the Outfall #004 sampling point.

Outfall #005 is a valve controlled discharge from a containment pond that receives flows from an oil/water separator serving the secondary containment structures of the General Aviation Tank Farm.

Outfall #006 is the point that would receive stormwater from the rental car fueling station and the associated AST's. These particular AST's are double-walled and do not sit in a basin-type secondary containment area.

All de-icing is performed at the gates and the facility has a collection drain surrounding the entire area that would catch any excessive propylene glycol. This line discharges into a retention basin that would ultimately discharge from Outfall #001. It is plugged during de-icing activities to prevent any excessive discharge of de-icer. The facility uses a vacuum glycol recovery vehicle to recover the overspray which is then taken to the City of Springfield Southwest WWTF.

Have any changes occurred at this facility or in the receiving water body that effects effluent limit derivation?

- No.

Application Date: 11/16/12
Expiration Date: 05/11/13
Last Inspection: 09/22/11 In Compliance ; Non-Compliance

OUTFALL(S) TABLE:

OUTFALL	DESIGN FLOW (CFS)	TREATMENT LEVEL	EFFLUENT TYPE
001	Dependent upon precipitation	BMP/IND	Stormwater
002	Dependent upon precipitation	BMP/IND	Stormwater
003	Dependent upon precipitation	BMP/IND	Stormwater
004	Dependent upon precipitation	BMP/IND	Stormwater
005	Dependent upon precipitation	BMP/IND	Stormwater
006	Dependent upon precipitation	BMP/IND	Stormwater

Facility Performance History & Comments:

The table below shows the facility's exceedances from 2008 to 2013 permit cycle. COD limits were inappropriate or too stringent for stormwater discharges. Thus, benchmark limits have been established for this permit cycle. If a sample exceeds a benchmark value, a review of the facilities SWPPP and BMPs must take place to determine whether corrective action is needed to reduce that pollutant in the stormwater discharge. This approach is necessary to protect existing water quality.

Part II – Receiving Stream Information

APPLICABLE DESIGNATIONS OF WATERS OF THE STATE:

As per Missouri's Effluent Regulations [10 CSR 20-7.015], the waters of the state are divided into the below listed seven (7) categories. Each category lists effluent limitations for specific parameters, which are presented in each outfall's Effluent Limitation Table and further discussed in the Derivation & Discussion of Limits section.

- Missouri or Mississippi River [10 CSR 20-7.015(2)]:
- Lake or Reservoir [10 CSR 20-7.015(3)]:
- Losing [10 CSR 20-7.015(4)]:
- Metropolitan No-Discharge [10 CSR 20-7.015(5)]:
- Special Stream [10 CSR 20-7.015(6)]:
- Subsurface Water [10 CSR 20-7.015(7)]:
- All Other Waters [10 CSR 20-7.015(8)]:

10 CSR 20-7.031 Missouri Water Quality Standards, the Department defines the Clean Water Commission water quality objectives in terms of "water uses to be maintained and the criteria to protect those uses." The receiving stream and/or 1st classified receiving stream's beneficial water uses to be maintained are located in the Receiving Stream Table located below in accordance with [10 CSR 20-7.031(3)].

RECEIVING STREAM(S) TABLE:

WATERBODY NAME	CLASS	WBID	DESIGNATED USES*	DISTANCE TO CLASSIFIED SEGMENT	12-DIGIT HUC**
Unnamed tributary to Rainer Branch	U	n/a	General Criteria	5.5 mi	10290106-0204
Clear Creek	P	01409	AQL, LWW, WBC-B		

* - Irrigation (IRR), Livestock & Wildlife Watering (LWW), Protection of Warm Water Aquatic Life and Human Health-Fish Consumption (AQL), Cool Water Fishery (CLF), Cold Water Fishery (CDF), Whole Body Contact Recreation (WBC), Secondary Contact Recreation (SCR), Drinking Water Supply (DWS), Industrial (IND), Groundwater (GRW). ** - Hydrologic Unit Code

RECEIVING STREAM(S) LOW-FLOW VALUES TABLE:

RECEIVING STREAM (U, C, P)	LOW-FLOW VALUES (CFS)		
	1Q10	7Q10	30Q10
Unnamed tributary to Rainer Branch (U)	0	0	0

Mixing Zone: Not Allowed [10 CSR 20-7.031(4)(A)4.B.(I)(a)].
Zone of Initial Dilution: Not Allowed [10 CSR 20-7.031(4)(A)4.B.(I)(b)].

RECEIVING STREAM MONITORING REQUIREMENTS:

No receiving water monitoring requirements recommended at this time.

Part III – Rationale and Derivation of Effluent Limitations & Permit Conditions

ALTERNATIVE EVALUATIONS FOR NEW FACILITIES:

As per [10 CSR 20-7.015(4)(A)], discharges to losing streams shall be permitted only after other alternatives including land application, discharges to a gaining stream and connection to a regional wastewater treatment facility have been evaluated and determined to be unacceptable for environmental and/or economic reasons.

Not Applicable; The facility does not discharge to a Losing Stream as defined by [10 CSR 20-2.010(36)] & [10 CSR 20-7.031(1)(N)], or is an existing facility.

ANTI-BACKSLIDING:

A provision in the Federal Regulations [CWA §303(d)(4); CWA §402(c); 40 CFR Part 122.44(I)] that requires a reissued permit to be as stringent as the previous permit with some exceptions.

- Limitations in this operating permit for the reissuance of this permit conform to the anti-backsliding provisions of Section 402(o) of the Clean Water Act, and 40 CFR Part 122.44.

- The Department determines that technical mistakes or mistaken interpretations of law were made in issuing the permit under section 402(a)(1)(b).

Monthly average limits were removed from this renewal because they are not required for intermittent discharges. The water quality standards are applied as a daily maximum for the protection of groundwater. When only sampling once per quarter, this reduces reporting and data management requirements, while effectively imposing the same effluent limit.

COD and TSS are indicator parameters used to evaluate the effectiveness of BMPs. This permit replaces limits with benchmarks. The facility could not consistently comply with the previous limits. The department believes that benchmarks are more appropriate for stormwater and provide the facility with the flexibility necessary to adaptively manage stormwater discharges

The limit for ethylbenzene increased from 262 to 320 to reflect the appropriate water quality standard.

ANTIDegradation:

In accordance with Missouri's Water Quality Standard [10 CSR 20-7.031(2)], the Department is to document by means of Antidegradation Review that the use of a water body's available assimilative capacity is justified. Degradation is justified by documenting the socio-economic importance of a discharging activity after determining the necessity of the discharge.

- Renewal no degradation proposed and no further review necessary.

BIOSOLIDS & SEWAGE SLUDGE:

Biosolids are solid materials resulting from domestic wastewater treatment that meet federal and state criteria for beneficial uses (i.e. fertilizer). Sewage sludge is solids, semi-solids, or liquid residue generated during the treatment of domestic sewage in a treatment works; including but not limited to, domestic septage; scum or solids removed in primary, secondary, or advanced wastewater treatment process; and a material derived from sewage sludge. Sewage sludge does not include ash generated during the firing of sewage sludge in a sewage sludge incinerator or grit and screening generated during preliminary treatment of domestic sewage in a treatment works. Additional information regarding biosolids and sludge is located at the following web address: <http://dnr.mo.gov/env/wpp/pub/index.html>, items WQ422 through WQ449.

Not applicable; This condition is not applicable to the permittee for this facility.

COMPLIANCE AND ENFORCEMENT:

Enforcement is the action taken by the Water Protection Program (WPP) to bring an entity into compliance with the Missouri Clean Water Law, its implementing regulations, and/or any terms and conditions of an operating permit. The primary purpose of the enforcement activity in the WPP is to resolve violations and return the entity to compliance.

Not Applicable; The permittee/facility is not currently under Water Protection Program enforcement action.

REASONABLE POTENTIAL ANALYSIS (RPA):

Federal regulation [40 CFR Part 122.44(d)(1)(i)] requires effluent limitations for all pollutants that are or may be discharged at a level that will cause or have the reasonable potential to cause or contribute to an in-stream excursion above narrative or numeric water quality standard.

In accordance with [40 CFR Part 122.44(d)(iii)] if the permit writer determines that any give pollutant has the reasonable potential to cause, or contribute to an in-stream excursion above the WQS, the permit must contain effluent limits for that pollutant.

Not Applicable; A RPA was not conducted for this facility.

SCHEDULE OF COMPLIANCE (SOC):

A schedule of remedial measures included in a permit, including an enforceable sequence of interim requirements (actions, operations, or milestone events) leading to compliance with the Missouri Clean Water Law, its implementing regulations, and/or the terms and conditions of an operating permit.

Not Applicable; This permit does not contain a SOC.

STORM WATER POLLUTION PREVENTION PLAN (SWPPP):

In accordance with 40 CFR 122.44(k) *Best Management Practices (BMPs)* to control or abate the discharge of pollutants when: (1) Authorized under section 304(e) of the Clean Water Act (CWA) for the control of toxic pollutants and hazardous substances from ancillary industrial activities; (2) Authorized under section 402(p) of the CWA for the control of storm water discharges; (3) Numeric effluent limitations are infeasible; or (4) the practices are reasonably necessary to achieve effluent limitations and standards or to carry out the purposes and intent of the CWA.

In accordance with the EPA's *Developing Your Stormwater Pollution Prevention Plan, A Guide for Industrial Operators*, (Document number EPA 833-B-09-002) [published by the United States Environmental Protection Agency (USEPA) in February 2009], BMPs are measures or practices used to reduce the amount of pollution entering (regarding this operating permit) waters of the state. BMPs may take the form of a process, activity, or physical structure.

Additionally in accordance with the Storm Water Management, a SWPPP is a series of steps and activities to (1) identify sources of pollution or contamination, and (2) select and carry out actions which prevent or control the pollution of storm water discharges.

Applicable; A SWPPP shall be developed and implemented for each site and shall incorporate required practices identified by the Department with jurisdiction, incorporate erosion control practices specific to site conditions, and provide for maintenance and adherence to the plan.

VARIANCE:

As per the Missouri Clean Water Law § 644.061.4, variances shall be granted for such period of time and under such terms and conditions as shall be specified by the commission in its order. The variance may be extended by affirmative action of the commission. In no event shall the variance be granted for a period of time greater than is reasonably necessary for complying with the Missouri Clean Water Law §§644.006 to 644.141 or any standard, rule or regulation promulgated pursuant to Missouri Clean Water Law §§644.006 to 644.141.

Not Applicable; This operating permit is not drafted under premises of a petition for variance.

WASTELOAD ALLOCATIONS (WLA) FOR LIMITS:

As per [10 CSR 20-2.010(78)], the amount of pollutant each discharger is allowed by the Department to release into a given stream after the Department has determined total amount of pollutant that may be discharged into that stream without endangering its water quality.

Applicable; Wasteload allocations were calculated where applicable using water quality criteria or water quality model results and the dilution equation below:

$$C = \frac{(C_s \times Q_s) + (C_e \times Q_e)}{(Q_e + Q_s)} \quad (\text{EPA/505/2-90-001, Section 4.5.5})$$

Where C = downstream concentration
Cs = upstream concentration
Qs = upstream flow
Ce = effluent concentration
Qe = effluent flow

Chronic wasteload allocations were determined using applicable chronic water quality criteria (CCC: criteria continuous concentration) and stream volume of flow at the edge of the mixing zone (MZ). Acute wasteload allocations were determined using applicable water quality criteria (CMC: criteria maximum concentration) and stream volume of flow at the edge of the zone of initial dilution (ZID).

Water quality based maximum daily and average monthly effluent limitations were calculated using methods and procedures outlined in USEPA's "Technical Support Document For Water Quality-based Toxics Control" (EPA/505/2-90-001).

Number of Samples "n":

Additionally, in accordance with the TSD for water quality-based permitting, effluent quality is determined by the underlying distribution of daily values, which is determined by the Long Term Average (LTA) associated with a particular Wasteload Allocation (WLA) and by the Coefficient of Variation (CV) of the effluent concentrations. Increasing or decreasing the monitoring frequency does not affect this underlying distribution or treatment performance, which should be, at a minimum, be targeted to comply with the values dictated by the WLA. Therefore, it is recommended that the actual planned frequency of monitoring normally be used to determine the value of "n" for calculating the AML. However, in situations where monitoring frequency is once per month or less, a higher value for "n" must be assumed for AML derivation purposes. Thus, the statistical procedure being employed using an assumed number of samples is "n = 4" at a minimum. For Total Ammonia as Nitrogen, "n = 30" is used.

WLA MODELING:

There are two general types of effluent limitations, technology-based effluent limits (TBELs) and water quality based effluent limits (WQBELs). If TBELs do not provide adequate protection for the receiving waters, then WQBEL must be used.

Not Applicable; A WLA study was either not submitted or determined not applicable by Department staff.

WATER QUALITY STANDARDS:

Per [10 CSR 20-7.031(3)], General Criteria shall be applicable to all waters of the state at all times including mixing zones. Additionally, [40 CFR 122.44(d)(1)] directs the Department to establish in each NPDES permit to include conditions to achieve water quality established under Section 303 of the Clean Water Act, including State narrative criteria for water quality.

WHOLE EFFLUENT TOXICITY (WET) TEST:

A WET test is a quantifiable method of determining if a discharge from a facility may be causing toxicity to aquatic life by itself, in combination with or through synergistic responses when mixed with receiving stream water.

Not Applicable; At this time, the permittee is not required to conduct WET test for this facility.

303(d) LIST & TOTAL MAXIMUM DAILY LOAD (TMDL):

Section 303(d) of the federal Clean Water Act requires that each state identify waters that are not meeting water quality standards and for which adequate water pollution controls have not been required. Water quality standards protect such beneficial uses of water as whole body contact (such as swimming), maintaining fish and other aquatic life, and providing drinking water for people, livestock and wildlife. The 303(d) list helps state and federal agencies keep track of waters that are impaired but not addressed by normal water pollution control programs.

A TMDL is a calculation of the maximum amount of a given pollutant that a body of water can absorb before its water quality is affected. If a water body is determined to be impaired as listed on the 303(d) list, then a watershed management plan will be developed that shall include the TMDL calculation

Not Applicable; This facility does not discharge to a 303(d) listed stream.

Part IV – Effluent Limits Determination

Outfalls #001 – #004 Stormwater

Effluent limitations derived and established in the below Effluent Limitations Table are based on current operations of the facility. Future permit action due to facility modification may contain new operating permit terms and conditions that supersede the terms and conditions, including effluent limitations, of this operating permit.

Monthly average limits were removed from this renewal because they are not required for intermittent discharges. The water quality standards are applied as a daily maximum for the protection of groundwater. When only sampling once per quarter, this reduces reporting and data management requirements, while effectively imposing the same effluent limit.

EFFLUENT LIMITATIONS TABLE:

PARAMETER	UNIT	DAILY MAXIMUM	WEEKLY AVERAGE	MONTHLY AVERAGE	MODIFIED	PREVIOUS PERMIT LIMITATIONS
FLOW	MGD	*			NO	*
CHEMICAL OXYGEN DEMAND	MG/L	*			YES	60/30
TOTAL SUSPENDED SOLIDS	MG/L	*			NO	*
PH	SU	6.5-9.0			NO	6.5-9.0
OIL & GREASE	MG/L	10			NO	15/10
BENZENE	µG/L	5			NO	10/5
TOLUENE	µG/L	1,000			NO	2010/1000
ETHYLBENZENE	µG/L	320			NO	526/262
XYLENE	µG/L	10,000			NO	20100/10000
AMMONIA AS N	MG/L	*			YES	**
CHLORIDE AS CL	MG/L	*			NO	*
NITRATE AS NO ₃	MG/L	*			NO	*
PROPYLENE GLYCOL	MG/L	*			NO	*
PRECIPITATION	INCHES	*			NO	*

* - Monitoring requirement only.

OUTFALLS #001 THROUGH #004– DERIVATIONS AND DISCUSSION OF LIMITS:

- **Flow.** In accordance with [40 CFR Part 122.44(i)(1)(ii)] the volume of effluent discharged from each outfall is needed to assure compliance with permitted effluent limitations. If the permittee is unable to obtain effluent flow, then it is the responsibility of the permittee to inform the Department, which may require the submittal of an operating permit modification.
- **Chemical Oxygen Demand (COD).** A COD benchmark of 100 mg/L was established using best professional judgment. An analysis of all of the data indicated that this is approximately the 95th percentile (when the 1600 mg/L outlier is removed), demonstrating that the benchmark is achievable.
- **Total Suspended Solids (TSS).** A TSS benchmark of 100 mg/L was established using best professional judgment. An analysis of all of the data indicated that this is approximately the 95th percentile (when the 1600 mg/L outlier is removed), demonstrating that the benchmark is achievable.
- **pH.** pH is measured in pH units and is not to be averaged. The pH is limited to the range of 6.5-9.0 pH units.

- **Oil & Grease.** Conventional pollutant, effluent limitation for protection of aquatic life; 10 mg/L monthly average, 15 mg/L daily maximum.
- **Benzene.** This parameter is required because of fueling areas onsite. Outfalls #001 - #004: DMR showed concentration ranging from 0.9 to 5 µg/L. No mixing is available, thus the water quality standard (WQS) for groundwater (GW) applies at the outfall. The WQS for the protection of GW is 5 µg/L.
- **Toluene.** This parameter is required because of fueling areas onsite. Outfalls #001 - #004: DMR showed concentration ranging from 0.9 to 5 µg/L. No mixing is available, thus the water quality standard (WQS) for groundwater (GW) applies at the outfall. The WQS for the protection of GW is 1,000 µg/L.
- **Ethylbenzene.** This parameter is required because of fueling areas onsite. Outfalls #001 - #004: DMR showed concentration ranging from 0.9 µg/L to 5 µg/L. No mixing is available, thus the water quality standard (WQS) for protection of aquatic life (AQL) applies at the outfall. The WQS for the protection of AQL is 320 µg/L.
- **Xylene.** This parameter is required because of fueling areas onsite. Outfalls #001 - #004: DMR showed concentration ranging from 2.9 to 15 µg/L. No mixing is available, thus the water quality standard (WQS) for groundwater (GW) applies at the outfall. The WQS for the protection of GW is 10,000 µg/L.
- **Total Ammonia Nitrogen.** Monitoring requirement remains. Ammonia may be present in stormwater runoff from winter maintenance activities and deicing agents.

Outfall #001: DMR showed concentration ranging from 0.1 to 0.98 mg/L

Outfall #002: DMR showed concentration ranging from 0.1 to 61 mg/L

Outfall #003: DMR showed concentration ranging from 0.1 to 0.67 mg/L

Outfall #004: DMR showed concentration ranging from 0.1 to 0.27 mg/L

- **Chloride as Cl.** Monitoring requirement remains. Chlorides may be present in stormwater runoff from winter maintenance activities and deicing agents.

Outfall #001: DMR showed concentration ranging from 1.28 mg/L to 24 mg/L

Outfall #002: DMR showed concentration ranging from 1.5 mg/L to 150 mg/L

Outfall #003: DMR showed concentration ranging from 1 mg/L to 44 mg/L

Outfall #004: DMR showed concentration ranging from 1 mg/L to 51 mg/L

- **Nitrate as NO₃.** Monitoring requirement remains because some deicing agents contain nitrate.

Outfall #001: DMR showed concentration ranging from 0.10 to 0.32 mg/L

Outfall #002: DMR showed concentration ranging from 0.1 to 1.3 mg/L

Outfall #003: DMR showed concentration ranging from 0.10 to 0.64 mg/L

Outfall #004: DMR showed concentration ranging from 0.10 to 0.25 mg/L

- **Settleable Solids.** REMOVED; parameter is redundant as TSS is already being monitored.
- **Propylene Glycol.** Monitoring requirements remains because the facility uses propylene glycol for deicing activities. Outfall #001-004: DMR showed concentration ranging from 9.9 mg/L to 41 mg/L and a one-time reading of 350 mg/L. This event corresponds to the 1600 mg/L spike in COD reported in December of 2008. Continued monitoring will provide data for evaluating benchmark exceedances.
- **Precipitation.** Monitoring requirement for Outfall #001 only.

Outfalls #005 & #006 Stormwater

Effluent limitations derived and established in the below Effluent Limitations Table are based on current operations of the facility. Future permit action due to facility modification may contain new operating permit terms and conditions that supersede the terms and conditions, including effluent limitations, of this operating permit.

EFFLUENT LIMITATIONS TABLE:

PARAMETER	UNIT	DAILY MAXIMUM	WEEKLY AVERAGE	MONTHLY AVERAGE	MODIFIED	PREVIOUS PERMIT LIMITATIONS
FLOW	MGD	*			NO	*
TOTAL SUSPENDED SOLIDS	MG/L	*			NO	*
CHEMICAL OXYGEN DEMAND	MG/L	*			NEW PARAMETER	
PH	SU	6.5-9.0			NO	6.5-9.0
OIL & GREASE	MG/L	10			NO	15/10
BENZENE	µG/L	5			NO	10/5
TOLUENE	µG/L	1,000			NO	2010/1000
ETHYLBENZENE	µG/L	320			NO	526/262
XYLENE	µG/L	10,000			NO	20100/10000

* - Monitoring requirement only.

OUTFALLS #005 & #006– DERIVATIONS AND DISCUSSION OF LIMITS:

- **Flow.** In accordance with [40 CFR Part 122.44(i)(1)(ii)] the volume of effluent discharged from each outfall is needed to assure compliance with permitted effluent limitations. If the permittee is unable to obtain effluent flow, then it is the responsibility of the permittee to inform the Department, which may require the submittal of an operating permit modification.
- **Chemical Oxygen Demand (COD).** A COD benchmark of 100 mg/L was established using best professional judgment. An analysis of all of the data indicated that this is approximately the 95th percentile (when the 1600 mg/L outlier is removed), demonstrating that the benchmark is achievable.
- **Total Suspended Solids (TSS).** A TSS benchmark of 100 mg/L was established using best professional judgment. An analysis of all of the data indicated that this is approximately the 95th percentile (when the 1600 mg/L outlier is removed), demonstrating that the benchmark is achievable.
- **pH.** pH is measured in pH units and is not to be averaged. The pH is limited to the range of 6.5-9.0 pH units.
- **Oil & Grease.** Conventional pollutant, effluent limitation for protection of aquatic life; 10 mg/L monthly average, 15 mg/L daily maximum.
- **Benzene.** This parameter is required because of fueling areas onsite. Outfalls #001 - #004: DMR showed concentration ranging from 0.9 to 5 µg/L. No mixing is available, thus the water quality standard (WQS) for groundwater (GW) applies at the outfall. The WQS for the protection of GW is 5 µg/L.
- **Toluene.** This parameter is required because of fueling areas onsite. Outfalls #001 - #004: DMR showed concentration ranging from 0.9 to 5 µg/L. No mixing is available, thus the water quality standard (WQS) for groundwater (GW) applies at the outfall. The WQS for the protection of GW is 1,000 µg/L.
- **Ethylbenzene.** This parameter is required because of fueling areas onsite. Outfalls #001 - #004: DMR showed concentration ranging from 0.9 µg/L to 5 µg/L. No mixing is available, thus the water quality standard (WQS) for protection of aquatic life (AQL) applies at the outfall. The WQS for the protection of AQL is 320 µg/L.
- **Xylene.** This parameter is required because of fueling areas onsite. Outfalls #001 - #004: DMR showed concentration ranging from 2.9 to 15 µg/L. No mixing is available, thus the water quality standard (WQS) for groundwater (GW) applies at the outfall. The WQS for the protection of GW is 10,000 µg/L.

Part V – Administrative Requirements

On the basis of preliminary staff review and the application of applicable standards and regulations, the Department, as administrative agent for the Missouri Clean Water Commission, proposes to issue a permit(s) subject to certain effluent limitations, schedules, and special conditions contained herein and within the operating permit. The proposed determinations are tentative pending public comment.

PERMIT SYNCHRONIZATION:

The Department of Natural Resources is currently undergoing a synchronization process for operating permits. Permits are normally issued on a five-year term, but to achieve synchronization many permits will need to be issued for less than the full five years allowed by regulation. The intent is that all permits within a watershed will move through the Watershed Based Management (WBM) cycle together will all expire in the same fiscal year. This will allow further streamlining by placing multiple permits within a smaller geographic area on public notice simultaneously, thereby reducing repeated administrative efforts. This will also allow the department to explore a watershed based permitting effort at some point in the future.

PUBLIC NOTICE:

The Department shall give public notice that a draft permit has been prepared and its issuance is pending. Additionally, public notice will be issued if a public hearing is to be held because of a significant degree of interest in and water quality concerns related to a draft permit. No public notice is required when a request for a permit modification or termination is denied; however, the requester and permittee must be notified of the denial in writing.

The Department must issue public notice of a pending operating permit or of a new or reissued statewide general permit. The public comment period is the length of time not less than 30 days following the date of the public notice which interested persons may submit written comments about the proposed permit.

For persons wanting to submit comments regarding this proposed operating permit, then please refer to the Public Notice page located at the front of this draft operating permit. The Public Notice page gives direction on how and where to submit appropriate comments.

- The Public Notice period for this operating permit was from 05/02/2014 to 06/02/2014. No responses received.

DATE OF FACT SHEET: APRIL 3, 2014

COMPLETED BY:

**AMANDA SAPPINGTON, CHIEF
INDUSTRIAL PERMITS UNIT
WATER PROTECTION PROGRAM
amanda.sappington@dnr.mo.gov**



STANDARD CONDITIONS FOR NPDES PERMITS
ISSUED BY
THE MISSOURI DEPARTMENT OF NATURAL RESOURCES
MISSOURI CLEAN WATER COMMISSION
REVISED
NOVEMBER 1, 2013

These Standard Conditions incorporate permit conditions as required by 40 CFR 122.41 or other applicable state statutes or regulations. These minimum conditions apply unless superseded by requirements specified in the permit.

Part I – General Conditions

Section A – Sampling, Monitoring, and Recording

1. **Sampling Requirements.**
 - a. Samples and measurements taken for the purpose of monitoring shall be representative of the monitored activity.
 - b. All samples shall be taken at the outfall(s) or Missouri Department of Natural Resources (Department) approved sampling location(s), and unless specified, before the effluent joins or is diluted by any other body of water or substance.
2. **Monitoring Requirements.**
 - a. Records of monitoring information shall include:
 - i. The date, exact place, and time of sampling or measurements;
 - ii. The individual(s) who performed the sampling or measurements;
 - iii. The date(s) analyses were performed;
 - iv. The individual(s) who performed the analyses;
 - v. The analytical techniques or methods used; and
 - vi. The results of such analyses.
 - b. If the permittee monitors any pollutant more frequently than required by the permit at the location specified in the permit using test procedures approved under 40 CFR Part 136, or another method required for an industry-specific waste stream under 40 CFR subchapters N or O, the results of such monitoring shall be included in the calculation and reported to the Department with the discharge monitoring report data (DMR) submitted to the Department pursuant to Section B, paragraph 7.
3. **Sample and Monitoring Calculations.** Calculations for all sample and monitoring results which require averaging of measurements shall utilize an arithmetic mean unless otherwise specified in the permit.
4. **Test Procedures.** The analytical and sampling methods used shall conform to the reference methods listed in 10 CSR 20-7.015 unless alternates are approved by the Department. The facility shall use sufficiently sensitive analytical methods for detecting, identifying, and measuring the concentrations of pollutants. The facility shall ensure that the selected methods are able to quantify the presence of pollutants in a given discharge at concentrations that are low enough to determine compliance with Water Quality Standards in 10 CSR 20-7.031 or effluent limitations unless provisions in the permit allow for other alternatives. A method is “sufficiently sensitive” when; 1) the method minimum level is at or below the level of the applicable water quality criterion for the pollutant or, 2) the method minimum level is above the applicable water quality criterion, but the amount of pollutant in a facility’s discharge is high enough that the method detects and quantifies the level of pollutant in the discharge, or 3) the method has the lowest minimum level of the analytical methods approved under 10 CSR 20-7.015. These methods are also required for parameters that are listed as monitoring only, as the data collected may be used to determine if limitations need to be established. A permittee is responsible for working with their contractors to ensure that the analysis performed is sufficiently sensitive.
5. **Record Retention.** Except for records of monitoring information required by the permit related to the permittee’s sewage sludge use and disposal activities, which shall be retained for a period of at least five (5) years (or longer as required by 40 CFR part 503), the permittee shall retain records of all monitoring information, including all calibration and maintenance records and all original strip chart recordings for continuous monitoring instrumentation, copies of all reports required by the permit, and records of all data used to complete the application for the permit, for a period of at least three (3) years from the date of the sample, measurement, report or application. This period may be extended by request of the Department at any time.

6. **Illegal Activities.**
 - a. The Federal Clean Water Act provides that any person who falsifies, tampers with, or knowingly renders inaccurate any monitoring device or method required to be maintained under the permit shall, upon conviction, be punished by a fine of not more than \$10,000, or by imprisonment for not more than two (2) years, or both. If a conviction of a person is for a violation committed after a first conviction of such person under this paragraph, punishment is a fine of not more than \$20,000 per day of violation, or by imprisonment of not more than four (4) years, or both.
 - b. The Missouri Clean Water Law provides that any person or who falsifies, tampers with, or knowingly renders inaccurate any monitoring device or method required to be maintained pursuant to sections 644.006 to 644.141 shall, upon conviction, be punished by a fine of not more than \$10,000, or by imprisonment for not more than six (6) months, or by both. Second and successive convictions for violation under this paragraph by any person shall be punished by a fine of not more than \$50,000 per day of violation, or by imprisonment for not more than two (2) years, or both.

Section B – Reporting Requirements

1. **Planned Changes.**
 - a. The permittee shall give notice to the Department as soon as possible of any planned physical alterations or additions to the permitted facility when:
 - i. The alteration or addition to a permitted facility may meet one of the criteria for determining whether a facility is a new source in 40 CFR 122.29(b); or
 - ii. The alteration or addition could significantly change the nature or increase the quantity of pollutants discharged. This notification applies to pollutants which are subject neither to effluent limitations in the permit, nor to notification requirements under 40 CFR 122.42(a)(1);
 - iii. The alteration or addition results in a significant change in the permittee’s sludge use or disposal practices, and such alteration, addition, or change may justify the application of permit conditions that are different from or absent in the existing permit, including notification of additional use or disposal sites not reported during the permit application process or not reported pursuant to an approved land application plan;
 - iv. Any facility expansions, production increases, or process modifications which will result in a new or substantially different discharge or sludge characteristics must be reported to the Department 60 days before the facility or process modification begins. Notification may be accomplished by application for a new permit. If the discharge does not violate effluent limitations specified in the permit, the facility is to submit a notice to the Department of the changed discharge at least 30 days before such changes. The Department may require a construction permit and/or permit modification as a result of the proposed changes at the facility.
2. **Twenty-Four Hour Reporting.**
 - a. The permittee shall report any noncompliance which may endanger health or the environment. Relevant information shall be provided orally or via the current electronic method approved by the Department, within 24 hours from the time the permittee becomes aware of the circumstances, and shall be reported to the appropriate Regional Office during normal business hours or the Environmental Emergency Response hotline at 573-634-2436 outside of normal business hours. A written submission shall also be provided within five (5) business days of the time the permittee becomes aware of the circumstances. The written submission shall contain a description of the noncompliance and its cause; the period of noncompliance, including exact dates and times, and if the noncompliance has not been corrected, the anticipated time it is expected to continue; and steps taken or planned to reduce, eliminate, and prevent reoccurrence of the noncompliance.



STANDARD CONDITIONS FOR NPDES PERMITS
ISSUED BY
THE MISSOURI DEPARTMENT OF NATURAL RESOURCES
MISSOURI CLEAN WATER COMMISSION
REVISED
NOVEMBER 1, 2013

- b. The following shall be included as information which must be reported within 24 hours under this paragraph.
 - i. Any unanticipated bypass which exceeds any effluent limitation in the permit.
 - ii. Any upset which exceeds any effluent limitation in the permit.
 - iii. Violation of a maximum daily discharge limitation for any of the pollutants listed by the Department in the permit required to be reported within 24 hours.
 - c. The Department may waive the written report on a case-by-case basis for reports under paragraph 2. b. of this section if the oral report has been received within 24 hours.
3. **Sanitary Sewer Overflow Reporting.** The following requirements solely reflect reporting obligations, and reporting does not necessarily reflect noncompliance, which may depend on the circumstances of the incident reported.
- a. **Twenty-Four Hour (24-Hour) Reporting.** The permittee or owner shall report any incident in which wastewater escapes the collection system such that it reaches waters of the state or it may pose an imminent or substantial endangerment to the health or welfare of persons. Relevant information shall be provided orally or via the current electronic method approved by the Department within 24 hours from the time the permittee becomes aware of the incident. A written submission shall also be provided within five (5) business days of the time the permittee or owner becomes aware of the incident. The Department may waive the written report on a case-by-case basis if the oral report has been received within 24 hours. The five (5) day reports may be provided via the current electronic method approved by the Department.
 - b. **Incidents Reported via Discharge Monitoring Reports (DMRs).** The permittee or owner shall report any event in which wastewater escapes the collection system, which does not enter waters of the state and is not expected to pose an imminent or substantial endangerment to the health or welfare of persons, which occur typically during wet weather events. Relevant information shall be provided with the permittee's or owner's DMRs.
4. **Anticipated Noncompliance.** The permittee shall give advance notice to the Department of any planned changes in the permitted facility or activity which may result in noncompliance with permit requirements. The notice shall be submitted to the Department 60 days prior to such changes or activity.
5. **Compliance Schedules.** Reports of compliance or noncompliance with, or any progress reports on, interim and final requirements contained in any compliance schedule of the permit shall be submitted no later than 14 days following each schedule date. The report shall provide an explanation for the instance of noncompliance and a proposed schedule or anticipated date, for achieving compliance with the compliance schedule requirement.
6. **Other Noncompliance.** The permittee shall report all instances of noncompliance not reported under paragraphs 2, 3, 4, and 7 of this section, at the time monitoring reports are submitted. The reports shall contain the information listed in paragraph 2. a. of this section.
7. **Other Information.** Where the permittee becomes aware that it failed to submit any relevant facts in a permit application, or submitted incorrect information in a permit application or in any report to the Department, it shall promptly submit such facts or information.
8. **Discharge Monitoring Reports.**
- a. Monitoring results shall be reported at the intervals specified in the permit.
 - b. Monitoring results must be reported to the Department via the current method approved by the Department, unless the permittee has been granted a waiver from using the method. If the permittee has been granted a waiver, the permittee must use forms provided by the Department.
 - c. Monitoring results shall be reported to the Department no later than the 28th day of the month following the end of the reporting period.

Section C – Bypass/Upset Requirements

1. **Definitions.**
 - a. *Bypass*: the intentional diversion of waste streams from any portion of a treatment facility.
 - b. *Severe Property Damage*: substantial physical damage to property, damage to the treatment facilities which causes them to become inoperable, or substantial and permanent loss of natural resources which can reasonably be expected to occur in the absence of a bypass. Severe property damage does not mean economic loss caused by delays in production.
 - c. *Upset*: an exceptional incident in which there is unintentional and temporary noncompliance with technology based permit effluent limitations because of factors beyond the reasonable control of the permittee. An upset does not include noncompliance to the extent caused by operational error, improperly designed treatment facilities, inadequate treatment facilities, lack of preventive maintenance, or careless or improper operation.
2. **Bypass Requirements.**
 - a. Bypass not exceeding limitations. The permittee may allow any bypass to occur which does not cause effluent limitations to be exceeded, but only if it also is for essential maintenance to assure efficient operation. These bypasses are not subject to the provisions of paragraphs 2. b. and 2. c. of this section.
 - b. Notice.
 - i. Anticipated bypass. If the permittee knows in advance of the need for a bypass, it shall submit prior notice, if possible at least 10 days before the date of the bypass.
 - ii. Unanticipated bypass. The permittee shall submit notice of an unanticipated bypass as required in Section B – Reporting Requirements, paragraph 5 (24-hour notice).
 - c. Prohibition of bypass.
 - i. Bypass is prohibited, and the Department may take enforcement action against a permittee for bypass, unless:
 1. Bypass was unavoidable to prevent loss of life, personal injury, or severe property damage;
 2. There were no feasible alternatives to the bypass, such as the use of auxiliary treatment facilities, retention of untreated wastes, or maintenance during normal periods of equipment downtime. This condition is not satisfied if adequate back-up equipment should have been installed in the exercise of reasonable engineering judgment to prevent a bypass which occurred during normal periods of equipment downtime or preventive maintenance; and
 3. The permittee submitted notices as required under paragraph 2. b. of this section.
 - ii. The Department may approve an anticipated bypass, after considering its adverse effects, if the Department determines that it will meet the three (3) conditions listed above in paragraph 2. c. i. of this section.
3. **Upset Requirements.**
 - a. Effect of an upset. An upset constitutes an affirmative defense to an action brought for noncompliance with such technology based permit effluent limitations if the requirements of paragraph 3. b. of this section are met. No determination made during administrative review of claims that noncompliance was caused by upset, and before an action for noncompliance, is final administrative action subject to judicial review.
 - b. Conditions necessary for a demonstration of upset. A permittee who wishes to establish the affirmative defense of upset shall demonstrate, through properly signed, contemporaneous operating logs, or other relevant evidence that:
 - i. An upset occurred and that the permittee can identify the cause(s) of the upset;
 - ii. The permitted facility was at the time being properly operated; and
 - iii. The permittee submitted notice of the upset as required in Section B – Reporting Requirements, paragraph 2. b. ii. (24-hour notice).
 - iv. The permittee complied with any remedial measures required under Section D – Administrative Requirements, paragraph 4.
 - c. Burden of proof. In any enforcement proceeding, the permittee seeking to establish the occurrence of an upset has the burden of proof.



STANDARD CONDITIONS FOR NPDES PERMITS
ISSUED BY
THE MISSOURI DEPARTMENT OF NATURAL RESOURCES
MISSOURI CLEAN WATER COMMISSION
REVISED
NOVEMBER 1, 2013

Section D – Administrative Requirements

1. **Duty to Comply.** The permittee must comply with all conditions of this permit. Any permit noncompliance constitutes a violation of the Missouri Clean Water Law and Federal Clean Water Act and is grounds for enforcement action; for permit termination, revocation and reissuance, or modification; or denial of a permit renewal application.
 - a. The permittee shall comply with effluent standards or prohibitions established under section 307(a) of the Federal Clean Water Act for toxic pollutants and with standards for sewage sludge use or disposal established under section 405(d) of the CWA within the time provided in the regulations that establish these standards or prohibitions or standards for sewage sludge use or disposal, even if the permit has not yet been modified to incorporate the requirement.
 - b. The Federal Clean Water Act provides that any person who violates section 301, 302, 306, 307, 308, 318 or 405 of the Act, or any permit condition or limitation implementing any such sections in a permit issued under section 402, or any requirement imposed in a pretreatment program approved under sections 402(a)(3) or 402(b)(8) of the Act, is subject to a civil penalty not to exceed \$25,000 per day for each violation. The Federal Clean Water Act provides that any person who negligently violates sections 301, 302, 306, 307, 308, 318, or 405 of the Act, or any condition or limitation implementing any of such sections in a permit issued under section 402 of the Act, or any requirement imposed in a pretreatment program approved under section 402(a)(3) or 402(b)(8) of the Act, is subject to criminal penalties of \$2,500 to \$25,000 per day of violation, or imprisonment of not more than one (1) year, or both. In the case of a second or subsequent conviction for a negligent violation, a person shall be subject to criminal penalties of not more than \$50,000 per day of violation, or by imprisonment of not more than two (2) years, or both. Any person who knowingly violates such sections, or such conditions or limitations is subject to criminal penalties of \$5,000 to \$50,000 per day of violation, or imprisonment for not more than three (3) years, or both. In the case of a second or subsequent conviction for a knowing violation, a person shall be subject to criminal penalties of not more than \$100,000 per day of violation, or imprisonment of not more than six (6) years, or both. Any person who knowingly violates section 301, 302, 303, 306, 307, 308, 318 or 405 of the Act, or any permit condition or limitation implementing any of such sections in a permit issued under section 402 of the Act, and who knows at that time that he thereby places another person in imminent danger of death or serious bodily injury, shall, upon conviction, be subject to a fine of not more than \$250,000 or imprisonment of not more than 15 years, or both. In the case of a second or subsequent conviction for a knowing endangerment violation, a person shall be subject to a fine of not more than \$500,000 or by imprisonment of not more than 30 years, or both. An organization, as defined in section 309(c)(3)(B)(iii) of the CWA, shall, upon conviction of violating the imminent danger provision, be subject to a fine of not more than \$1,000,000 and can be fined up to \$2,000,000 for second or subsequent convictions.
 - c. Any person may be assessed an administrative penalty by the EPA Director for violating section 301, 302, 306, 307, 308, 318 or 405 of this Act, or any permit condition or limitation implementing any of such sections in a permit issued under section 402 of this Act. Administrative penalties for Class I violations are not to exceed \$10,000 per violation, with the maximum amount of any Class I penalty assessed not to exceed \$25,000. Penalties for Class II violations are not to exceed \$10,000 per day for each day during which the violation continues, with the maximum amount of any Class II penalty not to exceed \$125,000.
 - d. It is unlawful for any person to cause or permit any discharge of water contaminants from any water contaminant or point source located in Missouri in violation of sections 644.006 to 644.141 of the Missouri Clean Water Law, or any standard, rule or regulation promulgated by the commission. In the event the commission or the director determines that any provision of sections 644.006 to 644.141 of the Missouri Clean Water Law or standard, rules, limitations or regulations promulgated pursuant thereto, or permits issued by, or any final abatement order, other order, or determination made by the commission or the director, or any filing requirement pursuant to sections 644.006 to 644.141 of the Missouri Clean Water Law or any other provision which this state is required to enforce pursuant to any federal water pollution control act, is being, was, or is in imminent danger of being violated, the commission or director may cause to have instituted a civil action in any court of competent jurisdiction for the injunctive relief to prevent any such violation or further violation or for the assessment of a penalty not to exceed \$10,000 per day for each day, or part thereof, the violation occurred and continues to occur, or both, as the court deems proper. Any person who willfully or negligently commits any violation in this paragraph shall, upon conviction, be punished by a fine of not less than \$2,500 nor more than \$25,000 per day of violation, or by imprisonment for not more than one year, or both. Second and successive convictions for violation of the same provision of this paragraph by any person shall be punished by a fine of not more than \$50,000 per day of violation, or by imprisonment for not more than two (2) years, or both.
2. **Duty to Reapply.**
 - a. If the permittee wishes to continue an activity regulated by this permit after the expiration date of this permit, the permittee must apply for and obtain a new permit.
 - b. A permittee with a currently effective site-specific permit shall submit an application for renewal at least 180 days before the expiration date of the existing permit, unless permission for a later date has been granted by the Department. (The Department shall not grant permission for applications to be submitted later than the expiration date of the existing permit.)
 - c. A permittees with currently effective general permit shall submit an application for renewal at least 30 days before the existing permit expires, unless the permittee has been notified by the Department that an earlier application must be made. The Department may grant permission for a later submission date. (The Department shall not grant permission for applications to be submitted later than the expiration date of the existing permit.)
3. **Need to Halt or Reduce Activity Not a Defense.** It shall not be a defense for a permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.
4. **Duty to Mitigate.** The permittee shall take all reasonable steps to minimize or prevent any discharge or sludge use or disposal in violation of this permit which has a reasonable likelihood of adversely affecting human health or the environment.
5. **Proper Operation and Maintenance.** The permittee shall at all times properly operate and maintain all facilities and systems of treatment and control (and related appurtenances) which are installed or used by the permittee to achieve compliance with the conditions of this permit. Proper operation and maintenance also includes adequate laboratory controls and appropriate quality assurance procedures. This provision requires the operation of back-up or auxiliary facilities or similar systems which are installed by a permittee only when the operation is necessary to achieve compliance with the conditions of the permit.
6. **Permit Actions.**
 - a. Subject to compliance with statutory requirements of the Law and Regulations and applicable Court Order, this permit may be modified, suspended, or revoked in whole or in part during its term for cause including, but not limited to, the following:
 - i. Violations of any terms or conditions of this permit or the law;
 - ii. Having obtained this permit by misrepresentation or failure to disclose fully any relevant facts;
 - iii. A change in any circumstances or conditions that requires either a temporary or permanent reduction or elimination of the authorized discharge; or
 - iv. Any reason set forth in the Law or Regulations.
 - b. The filing of a request by the permittee for a permit modification, revocation and reissuance, or termination, or a notification of planned changes or anticipated noncompliance does not stay any permit condition.



STANDARD CONDITIONS FOR NPDES PERMITS
ISSUED BY
THE MISSOURI DEPARTMENT OF NATURAL RESOURCES
MISSOURI CLEAN WATER COMMISSION
REVISED
NOVEMBER 1, 2013

7. **Permit Transfer.**
 - a. Subject to 10 CSR 20-6.010, an operating permit may be transferred upon submission to the Department of an application to transfer signed by the existing owner and the new owner, unless prohibited by the terms of the permit. Until such time the permit is officially transferred, the original permittee remains responsible for complying with the terms and conditions of the existing permit.
 - b. The Department may require modification or revocation and reissuance of the permit to change the name of the permittee and incorporate such other requirements as may be necessary under the Missouri Clean Water Law or the Federal Clean Water Act.
 - c. The Department, within 30 days of receipt of the application, shall notify the new permittee of its intent to revoke or reissue or transfer the permit.
8. **Toxic Pollutants.** The permittee shall comply with effluent standards or prohibitions established under section 307(a) of the Federal Clean Water Act for toxic pollutants and with standards for sewage sludge use or disposal established under section 405(d) of the Federal Clean Water Act within the time provided in the regulations that establish these standards or prohibitions or standards for sewage sludge use or disposal, even if the permit has not yet been modified to incorporate the requirement.
9. **Property Rights.** This permit does not convey any property rights of any sort, or any exclusive privilege.
10. **Duty to Provide Information.** The permittee shall furnish to the Department, within a reasonable time, any information which the Department may request to determine whether cause exists for modifying, revoking and reissuing, or terminating this permit or to determine compliance with this permit. The permittee shall also furnish to the Department upon request, copies of records required to be kept by this permit.
11. **Inspection and Entry.** The permittee shall allow the Department, or an authorized representative (including an authorized contractor acting as a representative of the Department), upon presentation of credentials and other documents as may be required by law, to:
 - a. Enter upon the permittee's premises where a regulated facility or activity is located or conducted, or where records must be kept under the conditions of the permit;
 - b. Have access to and copy, at reasonable times, any records that must be kept under the conditions of this permit;
 - c. Inspect at reasonable times any facilities, equipment (including monitoring and control equipment), practices, or operations regulated or required under this permit; and
 - d. Sample or monitor at reasonable times, for the purposes of assuring permit compliance or as otherwise authorized by the Federal Clean Water Act or Missouri Clean Water Law, any substances or parameters at any location.
12. **Closure of Treatment Facilities.**
 - a. Persons who cease operation or plan to cease operation of waste, wastewater, and sludge handling and treatment facilities shall close the facilities in accordance with a closure plan approved by the Department.
 - b. Operating Permits under 10 CSR 20-6.010 or under 10 CSR 20-6.015 are required until all waste, wastewater, and sludges have been disposed of in accordance with the closure plan approved by the Department and any disturbed areas have been properly stabilized. Disturbed areas will be considered stabilized when perennial vegetation, pavement, or structures using permanent materials cover all areas that have been disturbed. Vegetative cover, if used, shall be at least 70% plant density over 100% of the disturbed area.
13. **Signatory Requirement.**
 - a. All permit applications, reports required by the permit, or information requested by the Department shall be signed and certified. (See 40 CFR 122.22 and 10 CSR 20-6.010)
 - b. The Federal Clean Water Act provides that any person who knowingly makes any false statement, representation, or certification in any record or other document submitted or required to be maintained under this permit, including monitoring reports or reports of compliance or non-compliance shall, upon conviction, be punished by a fine of not more than \$10,000 per violation, or by imprisonment for not more than six (6) months per violation, or by both.
14. **Severability.** The provisions of the permit are severable, and if any provision of the permit, or the application of any provision of the permit to any circumstance, is held invalid, the application of such provision to other circumstances, and the remainder of the permit, shall not be affected thereby.



MISSOURI DEPARTMENT OF NATURAL RESOURCES
 WATER PROTECTION PROGRAM, WATER POLLUTION BRANCH
 (SEE MAP FOR APPROPRIATE REGIONAL OFFICE)
FORM A - APPLICATION FOR CONSTRUCTION OR OPERATING PERMIT UNDER MISSOURI CLEAN WATER LAW

AP 13927

FOR AGENCY USE ONLY

CHECK NO.

DATE RECEIVED

FEE SUBMITTED

11/16/12

0 00

NOTE PLEASE READ THE ACCOMPANYING INSTRUCTIONS BEFORE COMPLETING THIS FORM.

- 1.00** This application is for:
- a construction permit
 - an operating permit for a new or unpermitted facility
 - an operating permit modification
 - an operating permit renewal: permit # MO0134830
 - a site specific storm water permit
- Reason: _____
 Expiration date: 5/11/13
- (See instructions for appropriate fee to be submitted with application)

2.00 FACILITY

NAME SPRINGFIELD-BRANSON NATIONAL AIRPORT		PHONE	417-868-0500
ADDRESS (PHYSICAL) 2300 N. AIRPORT BOULEVARD		CITY	SPRINGFIELD
		STATE	MO
		ZIP	65802

2.10 Is this a new facility constructed under a Missouri Construction Permit? YES NO
 If yes, please provide Missouri Construction Permit Number: _____

3.00 OWNER

NAME CITY OF SPRINGFIELD		EMAIL ADDRESS	PHONE	417-868-0500
ADDRESS (MAILING) 840 BOONVILLE		CITY	SPRINGFIELD	STATE
			MO	ZIP
				65802

3.10 Request review of draft permit prior to Public Notice? YES NO

4.00 CONTINUING AUTHORITY

NAME SPRINGFIELD-BRANSON NATIONAL AIRPORT		PHONE	417-868-0500
ADDRESS (MAILING) 2300 N. AIRPORT BOULEVARD		CITY	SPRINGFIELD
		STATE	MO
		ZIP	65802

5.00 OPERATOR

NAME SPRINGFIELD-BRANSON NATIONAL AIRPORT		CERTIFICATE NUMBER	PHONE	417-868-0500
ADDRESS (PHYSICAL) 2300 N. AIRPORT BOULEVARD, SUITE 100		CITY	SPRINGFIELD	STATE
			MO	ZIP
				65802

6.00 FACILITY CONTACT

NAME SHAWN SCHROEDER		TITLE ASST. DIRECTOR OF AVIATION	PHONE	417-868-0500
			FAX	417-868-0501

7.00 ADDITIONAL FACILITY INFORMATION

7.10 Legal Description of Outfalls. (Attach additional sheets if necessary)

- 001 SE¼ SW¼ Sec 1 T 29N R 23W GREENE County
- 002 SW¼ NE¼ Sec 12 T 29N R 23W GREENE County
- 003 NW¼ SW¼ Sec 6 T 29N R 22W GREENE County
- 004 NW¼ SW¼ Sec 6 T 29N R 22W GREENE County

RECEIVED

NOV 16 2012

7.20 Primary Standard Industrial Classification (SIC) Code: 4581



MISSOURI DEPARTMENT OF NATURAL RESOURCES
 WATER PROTECTION PROGRAM, WATER POLLUTION BRANCH
 (SEE MAP FOR APPROPRIATE REGIONAL OFFICE)
FORM A – APPLICATION FOR CONSTRUCTION OR OPERATING PERMIT UNDER MISSOURI CLEAN WATER LAW

FOR AGENCY USE ONLY	
CHECK NO.	
DATE RECEIVED	FEE SUBMITTED

NOTE ▶ PLEASE READ THE ACCOMPANYING INSTRUCTIONS BEFORE COMPLETING THIS FORM.

1.00 This application is for:

a construction permit

an operating permit for a new or unpermitted facility

(See instructions for appropriate fee to be submitted with application)

an operating permit modification

Reason: _____

an operating permit renewal: permit # MO0134830

Expiration date: _____

a site specific storm water permit

2.00 FACILITY

NAME SPRINGFIELD-BRANSON NATIONAL AIRPORT		PHONE	417-868-0500
		FAX	417-868-0501
ADDRESS (PHYSICAL) 2300 N. AIRPORT BOULEVARD	CITY SPRINGFIELD	STATE MO	ZIP 65802

2.10 Is this a new facility constructed under a Missouri Construction Permit? YES NO

If yes, please provide Missouri Construction Permit Number: _____

3.00 OWNER

NAME CITY OF SPRINGFIELD		EMAIL ADDRESS	PHONE	417-868-0500
			FAX	417-868-0501
ADDRESS (MAILING) 840 BOONVILLE	CITY SPRINGFIELD	STATE MO	ZIP 65802	

3.10 Request review of draft permit prior to Public Notice? YES NO

4.00 CONTINUING AUTHORITY

NAME SPRINGFIELD-BRANSON NATIONAL AIRPORT		PHONE	417-868-0500
		FAX	417-868-0501
ADDRESS (MAILING) 2300 N. AIRPORT BOULEVARD	CITY SPRINGFIELD	STATE MO	ZIP 65802

5.00 OPERATOR

NAME SPRINGFIELD-BRANSON NATIONAL AIRPORT		CERTIFICATE NUMBER	PHONE	417-868-0500
			FAX	417-868-0501
ADDRESS (PHYSICAL) 2300 N. AIRPORT BOULEVARD, SUITE 100	CITY SPRINGFIELD	STATE MO	ZIP 65802	

6.00 FACILITY CONTACT

NAME SHAWN SCHROEDER		TITLE ASST. DIRECTOR OF AVIATION	PHONE	417-868-0500
			FAX	417-868-0501

7.00 ADDITIONAL FACILITY INFORMATION

7.10 Legal Description of Outfalls. (Attach additional sheets if necessary)

005 NW¹/₄ NW¹/₄ Sec 12 T 29N R 23W GREENE County

006 NW¹/₄ SW¹/₄ Sec 6 T 29N R 23W GREENE County

____¹/₄ ____¹/₄ Sec ____ T ____ R ____ County

____¹/₄ ____¹/₄ Sec ____ T ____ R ____ County

7.20 Primary Standard Industrial Classification (SIC) Code: 4581

8.0 ADDITIONAL FORMS AND MAPS NECESSARY TO COMPLETE THIS APPLICATION
(Complete all forms that are applicable)

- A. Is your facility a manufacturing, commercial, mining or silviculture waste treatment facility?
 If yes, complete Form C. YES NO
- B. Is your facility considered a "Primary Industry" under U.S. EPA guidelines:
 If yes, complete Forms C and D. YES NO
- C. Is application for storm water discharges only?
 If yes, complete U.S. EPA Form 2F. YES NO
- D. Attach a map showing all outfalls and the receiving stream at 1" = 2000' scale.
- E. Is wastewater land applied? YES NO
- F. Is sludge, biosolids, ash or residuals generated, treated, stored or land applied?
 If yes, complete Form R. YES NO

9.0 DOWNSTREAM LANDOWNER(S) Attach additional sheets as necessary. See Instructions. (PLEASE SHOW LOCATION ON MAP. SEE 8.00 D ABOVE).

NAME
 JAMES R. CRIGER

ADDRESS
 504 W. KEARNEY

CITY
 SPRINGFIELD

STATE
 MO

ZIP
 65803

10.0 I certify that I am familiar with the information contained in the application, that to the best of my knowledge and belief such information is true, complete and accurate, and if granted this permit, I agree to abide by the Missouri Clean Water Law and all rules, regulations, orders and decisions, subject to any legitimate appeal available to applicant under the Missouri Clean Water Law to the Missouri Clean Water Commission.

NAME AND OFFICIAL TITLE (TYPE OR PRINT)
 SHAWN SCHROEDER, ASSISTANT DIRECTOR OF AVIATION

PHONE NO. (AREA CODE & NO.)
 (417) 868-0500

SIGNATURE


DATE SIGNED
 11-13-12


MO 780-1479 (9-05)

BEFORE MAILING, PLEASE ENSURE ALL SECTIONS ARE COMPLETED AND ADDITIONAL FORMS, IF APPLICABLE, ARE INCLUDED.

HAVE YOU INCLUDED:

- Appropriate Fees?
- Map at 1" = 2000' scale?
- Signature?
- Form C, if applicable?
- Form D, if applicable?
- Form 2F, if applicable?
- Form I (Irrigation), if applicable?
- Form R (Sludge), if applicable?

S:\Geotech-Environmental\Donny\184612 - Springfield Airport Permits\Permit Renewal 2013\New Outfall Map.dwg

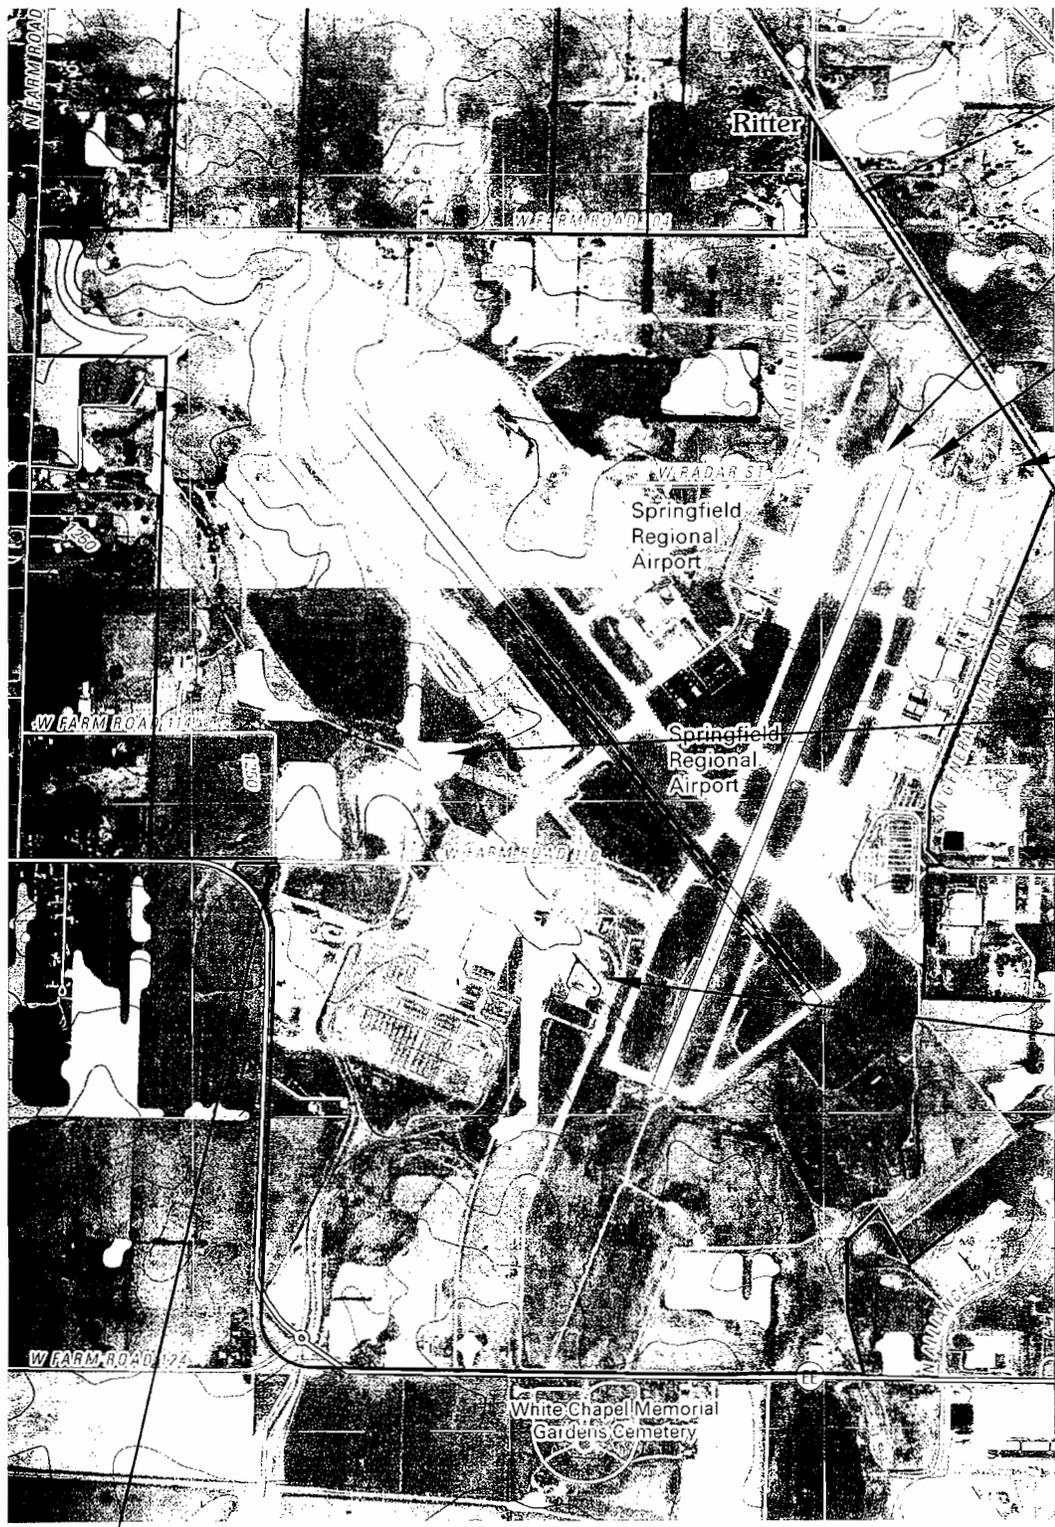

APPROXIMATE
PROPERTY
BOUNDARY

OUTFALL 003

OUTFALL 004

OUTFALL 006

OUTFALL 001

OUTFALL 002

OUTFALL 005



SCALE
1"=2000'




PALMERTON & PARRISH, INC.
4168 West Kearney Street
Springfield, MO 65803
(417) 864-6000

SPRINGFIELD-BRANSON NATIONAL AIRPORT
SITE LOCATION MAP

CLIENT: SPRINGFIELD-BRANSON NATIONAL AIRPORT
PROJECT NO.: 184612

DATE: 11/9/2012

S:\Geotech-Environmental\Donny\184612 - Springfield Airport Permits\Permit Re

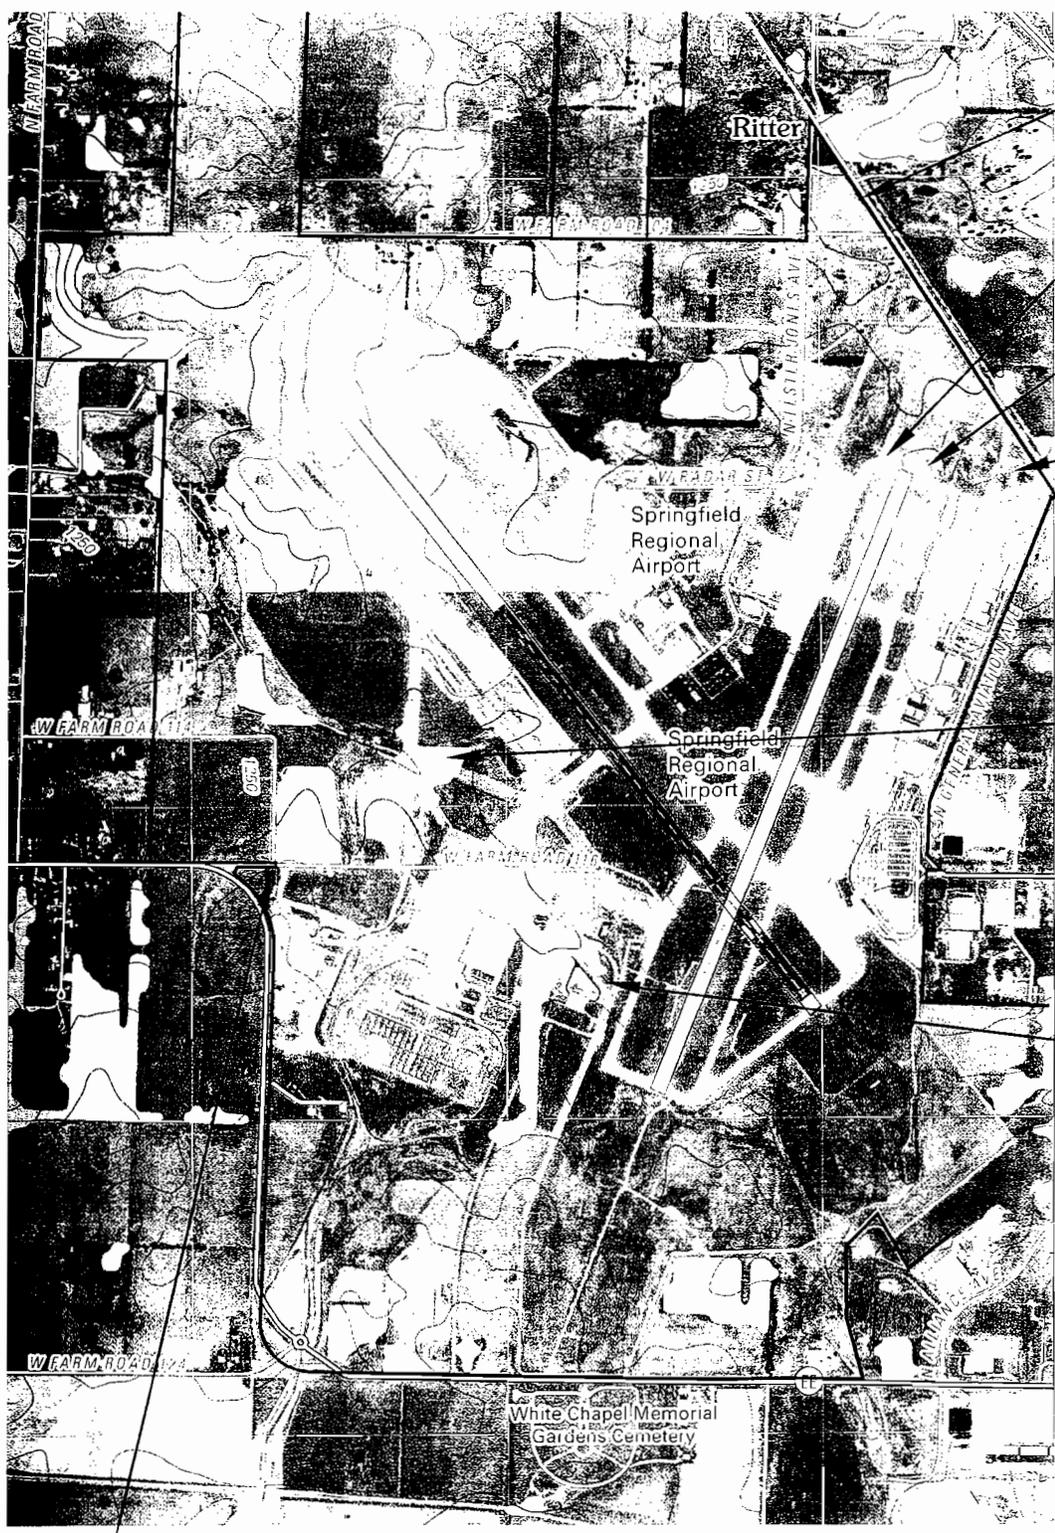

APPROXIMATE
PROPERTY
BOUNDARY

OUTFALL 003

OUTFALL 004

OUTFALL 006

OUTFALL 001

OUTFALL 002

OUTFALL 005



SCALE
1"=2000'



PALMERTON & PARRISH, INC.
4168 West Kearney Street
Springfield, MO 65803
(417) 864-6000

SPRINGFIELD-BRANSON NATIONAL AIRPORT
SITE LOCATION MAP

CLIENT: SPRINGFIELD-BRANSON NATIONAL AIRPORT
PROJECT NO.: 184612
DATE: 11/9/2012



APPROXIMATE
PROPERTY
BOUNDARY

OUTFALL 003

OUTFALL 004

OUTFALL 006

OUTFALL 001

OUTFALL 002

OUTFALL 005



SCALE
1"=2000'




PALMERTON & PARRISH, INC.
4168 West Kearney Street
Springfield, MO 65803
(417) 864-6000

**SPRINGFIELD-BRANSON NATIONAL AIRPORT
SITE LOCATION MAP**

CLIENT: SPRINGFIELD-BRANSON NATIONAL AIRPORT
PROJECT NO.: 184612

DATE: 11/9/2012

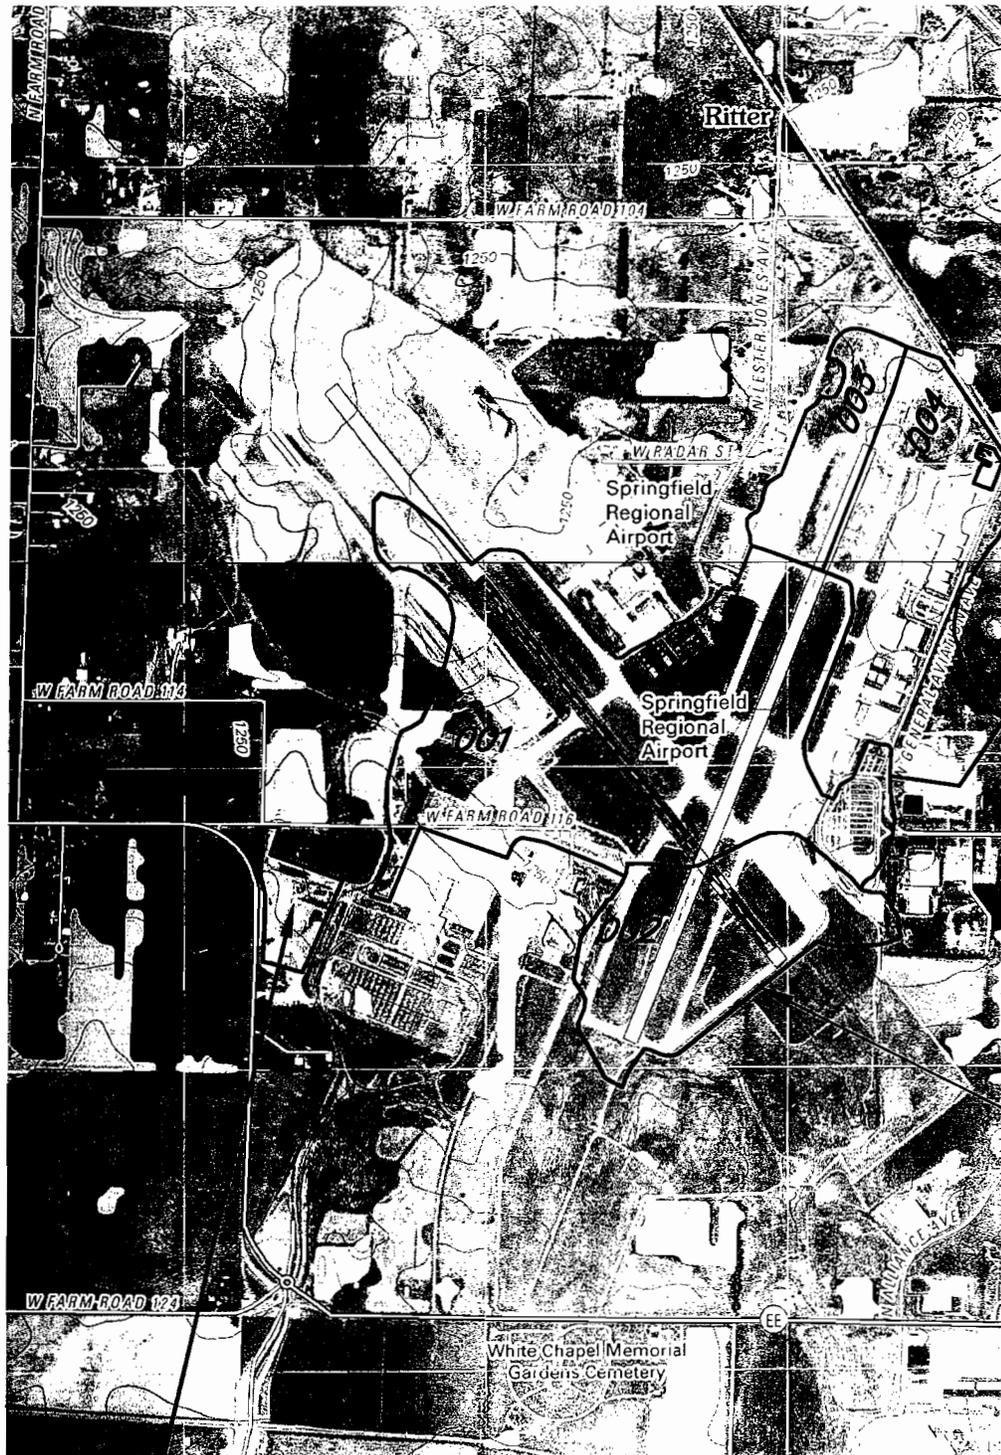

APPROXIMATE
DRAINAGE AREA
BOUNDARY



SCALE
1"=2000'



PALMERTON & PARRISH, INC.
4168 West Kearney Street
Springfield, MO 65803
(417) 864-6000

SPRINGFIELD-BRANSON NATIONAL AIRPORT
DRAINAGE AREA MAP

CLIENT: SPRINGFIELD-BRANSON NATIONAL AIRPORT
PROJECT NO.: 184612

DATE: 11/9/2012



MISSOURI DEPARTMENT OF NATURAL RESOURCES
 WATER PROTECTION PROGRAM, WATER POLLUTION BRANCH
FORM C – APPLICATION FOR DISCHARGE PERMIT –
MANUFACTURING, COMMERCIAL, MINING,
SILVICULTURE OPERATIONS, PROCESS & STORM WATER

FOR AGENCY USE ONLY	
CHECK NO.	
DATE RECEIVED	FEE SUBMITTED

NOTE: DO NOT ATTEMPT TO COMPLETE THIS FORM BEFORE READING THE ACCOMPANYING INSTRUCTIONS

1.00 NAME OF FACILITY
 Springfield-Branson National Airport

1.10 THIS FACILITY IS NOW IN OPERATION UNDER MISSOURI OPERATING PERMIT NUMBER
 MO-0134830

1.20 THIS IS A NEW FACILITY AND WAS CONSTRUCTED UNDER MISSOURI CONSTRUCTION PERMIT NUMBER (COMPLETE ONLY IF THIS FACILITY DOES NOT HAVE AN OPERATING PERMIT).

2.00 LIST THE STANDARD INDUSTRIAL CLASSIFICATION (SIC) CODES APPLICABLE TO YOUR FACILITY (FOUR DIGIT CODE)

A. FIRST 4581 - Airports B. SECOND _____

C. THIRD _____ D. FOURTH _____

2.10 FOR EACH OUTFALL GIVE THE LEGAL DESCRIPTION.

OUTFALL NUMBER (LIST)	SE 1/4	SW 1/4	SEC	T	R	COUNTY
001			1	29 N	23 W	Greene
002	SW	NE	12	T29N	R23W	Greene
003, 004, 006	NW	SW	6	T29N	R22W	Greene
005	NW	NW	12	T29N	R22W	Greene

2.20 FOR EACH OUTFALL LIST THE NAME OF THE RECEIVING WATER

OUTFALL NUMBER (LIST)	RECEIVING WATER
001, 002, & 005	Unnamed Tributary of Rainer Branch
003, 004, & 006	Sinkhole

2.30 BRIEFLY DESCRIBE THE NATURE OF YOUR BUSINESS
 Operating and maintaining an airport including servicing, repairing (except on a factory basis), maintaining, and storing aircraft and in furnishing coordinated handling services for air freight and passengers.

RECEIVED
 NOV 16 2012
 WATER PROTECTION PROGRAM

2.40 CONTINUED

C. EXCEPT FOR STORM RUNOFF, LEAKS OR SPILLS, ARE ANY OF THE DISCHARGES DESCRIBED IN ITEMS A OR B INTERMITTENT OR SEASONAL?

YES (COMPLETE THE FOLLOWING TABLE) NO (GO TO SECTION 2.50)

1. OUTFALL NUMBER <i>(list)</i>	2. OPERATION(S) CONTRIBUTING FLOW <i>(list)</i>	3. FREQUENCY		4. FLOW				C. DURATION <i>(in days)</i>
		A. DAYS PER WEEK <i>(specify average)</i>	B. MONTHS PER YEAR <i>(specify average)</i>	A. FLOW RATE <i>(in mgd)</i>		B. TOTAL VOLUME <i>(specify with units)</i>		
				1. LONG TERM AVERAGE	2. MAXIMUM DAILY	4. LONG TERM DAILY	3. MAXIMUM AVERAGE	
001 002 003 004	De-icing		6					

2.50 MAXIMUM PRODUCTION

A. DOES AN EFFLUENT GUIDELINE LIMITATION PROMULGATED BY EPA UNDER SECTION 304 OF THE CLEAN WATER ACT APPLY TO YOUR FACILITY?

YES (COMPLETE B.) NO (GO TO SECTION 2.60)

B. ARE THE LIMITATIONS IN THE APPLICABLE EFFLUENT GUIDELINES EXPRESSED IN TERMS OF PRODUCTION (OF OTHER MEASURE OF OPERATION)?

YES (COMPLETE c.) NO (GO TO SECTION 2.60)

C. IF YOU ANSWERED "YES" TO B. LIST THE QUANTITY THAT REPRESENTS AN ACTUAL MEASUREMENT OF YOUR MAXIMUM LEVEL OF PRODUCTION, EXPRESSED IN THE TERMS AND UNITS USED IN THE APPLICABLE EFFLUENT GUIDELINE AND INDICATE THE AFFECTED OUTFALLS.

1. MAXIMUM QUANTITY			2. AFFECTED OUTFALLS <i>(list outfall numbers)</i>
A. QUANTITY PER DAY	B. UNITS OF MEASURE	C. OPERATION, PRODUCT, MATERIAL, ETC. <i>(specify)</i>	

2.60 IMPROVEMENTS

A. ARE YOU NOW REQUIRED BY ANY FEDERAL, STATE OR LOCAL AUTHORITY TO MEET, ANY IMPLEMENTATION SCHEDULE FOR THE CONSTRUCTION, UPGRADING OR OPERATION OF WASTEWATER TREATMENT EQUIPMENT OR PRACTICES OR ANY OTHER ENVIRONMENTAL PROGRAMS THAT MAY AFFECT THE DISCHARGES DESCRIBED IN THIS APPLICATION? THIS INCLUDES, BUT IS NOT LIMITED TO, PERMIT CONDITIONS, ADMINISTRATIVE OR ENFORCEMENT ORDERS, ENFORCEMENT COMPLIANCE SCHEDULE LETTERS, STIPULATIONS, COURT ORDERS AND GRANT OR LOAN CONDITIONS.

YES (COMPLETE THE FOLLOWING TABLE) NO (GO TO 3.00)

1. IDENTIFICATION OF CONDITION AGREEMENT, ETC.	2. AFFECTED OUTFALLS		3. BRIEF DESCRIPTION OF PROJECT	4. FINAL COMPLIANCE DATE	
				A. REQUIRED	B. PROJECTED
MO State Operating Permit MO-0134830	001, 002, 003, 004	005, 006	Monitoring of storm water runoff		

B. OPTIONAL: YOU MAY ATTACH ADDITIONAL SHEETS DESCRIBING ANY ADDITIONAL WATER POLLUTION CONTROL PROGRAMS (OR OTHER ENVIRONMENTAL PROJECTS THAT MAY AFFECT YOUR DISCHARGES) YOU NOW HAVE UNDER WAY OR ARE YOU PLANNING. INDICATE WHETHER EACH PROGRAM IS NOW UNDER WAY OR PLANNED, AND INDICATE YOUR ACTUAL OR PLANNED SCHEDULES FOR CONSTRUCTION.

MARK "X" IF DESCRIPTION OF ADDITIONAL CONTROL PROGRAMS IS ATTACHED.

3.10 BIOLOGICAL TOXICITY TESTING DATA

DO YOU HAVE ANY KNOWLEDGE OR REASON TO BELIEVE THAT ANY BIOLOGICAL TEST FOR ACUTE OR CHRONIC TOXICITY HAS BEEN MADE ON ANY OF YOUR DISCHARGES OR ON RECEIVING WATER IN RELATION TO YOUR DISCHARGE WITHIN THE LAST THREE YEARS?

YES (IDENTIFY THE TEST(S) AND DESCRIBE THEIR PURPOSES BELOW.) NO (GO TO 3.20)

3.20 CONTRACT ANALYSIS INFORMATION


WERE ANY OF THE ANALYSES REPORTED PERFORMED BY A CONTRACT LABORATORY OR CONSULTING FIRM?

YES (LIST THE NAME, ADDRESS AND TELEPHONE NUMBER OF AND POLLUTANTS ANALYZED BY EACH SUCH LABORATORY OR FIRM BELOW.) NO (GO TO 3.30)

A. NAME	B. ADDRESS	C. TELEPHONE (area code and number)	D. POLLUTANTS ANALYZED (list)
PDC Laboratories, Inc.	2231 W. Altofer Dr. Peoria, IL 61615	(309) 692-9688	COD, TSS, Settleable Solids, Oil & Grease, BTEX, Chloride, Nitrate, Ammonia, Propylene Glycol
Palmerton & Parrish, Inc.	4168 W. Kearney Springfield, MO 65803	(417) 864-6000	pH, Flow

3.30 CERTIFICATION

I certify under penalty of law that I have personally examined and am familiar with the information submitted in this application and all attachments and that, based on my inquiry of those individuals immediately responsible for obtaining the information, I believe the information is true, accurate and complete. I am aware there are significant penalties for submitting false information, including the possibility of fine and imprisonment.

NAME AND OFFICIAL TITLE (TYPE OR PRINT) Shawn Schroeder, Assistant Director of Aviation	TELEPHONE NUMBER WITH AREA CODE (417) 868-0500
SIGNATURE (SEE INSTRUCTIONS) 	DATE SIGNED 11-13-12

PLEASE PRINT OR TYPE. You may report some or all of this information on separate sheet instead of completing these pages.
 (Use the same format)
 SEE INSTRUCTIONS

FORM C
 TABLE 1 FOR 3.00 ITEM A AND B

OUTFALL NO.
 001

INTAKE AND EFFLUENT CHARACTERISTICS

1. POLLUTANT	2. EFFLUENT				3. UNITS (specify if blank)				4. INTAKE (optional)		B. NO. OF ANALYSES	
	A. MAXIMUM DAILY VALUE		B. MAXIMUM 30 DAY VALUE (if available)		C. LONG TERM AVRG. VALUE (if available)		D. NO. OF ANALYSES	A. CONCENTRATION	B. MASS	A. LONG TERM AVRG. VALUE		
	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS				(1) CONCENTRATION		(2) MASS
A. Biochemical Oxygen Demand (BOD)												
B. Chemical Oxygen Demand (COD)						15.23		mg/L	lbs			
C. Total organic Carbon (TOC)												
D. Total Suspended Solids (TSS)						14.9		mg/L	lbs			
E. Ammonia (as N)						0.15		mg/L	lbs			
F. Flow	VALUE				VALUE	1,593,000				VALUE		
G. Temperature (winter)	VALUE				VALUE			°C		VALUE		
H. Temperature (summer)	VALUE				VALUE			°C		VALUE		
I. pH	MINIMUM 6.40	MAXIMUM 7.22		MINIMUM	MAXIMUM							

PART B - Mark "X" in column 2-a for each pollutant you know or have reason to believe is present. Mark "X" in column 2-b for each pollutant you believe to be absent. If you mark column 2-a for any pollutant, you must provide the results for at least one analysis for that pollutant. Complete one table for each outfall. See the instructions for additional details and requirements.

1. POLLUTANT AND CAS NUMBER (if available)	2. MARK "X"		3. EFFLUENT				4. UNITS				5. INTAKE (optional)		B. NO. OF ANALYSES	
	A. BELIEVED PRESENT	B. BELIEVED ABSENT	A. MAXIMUM DAILY VALUE		B. MAXIMUM 30 DAY VALUE (if available)		C. LONG TERM AVRG. VALUE (if available)		D. NO. OF ANALYSES	A. CONCENTRATION	B. MASS	A. LONG TERM AVRG. VALUE		
			(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS				(1) CONCENTRATION		(2) MASS
A. Bromide (24959-67-9)		X												
B. Chlorine Total Residual		X												
C. Color		X												
D. Fecal Coliform		X												
E. Fluoride (16984-48-8)		X												
F. Nitrate-Nitrate (as N)	X						0.4	5.3	4	mg/L	lbs			

1. POLLUTANT AND CAS NUMBER (if available)	2. MARK "X"		3. EFFLUENT						4. UNITS			5. INTAKE (optional)		
	A. BELIEVED PRESENT	B. BELIEVED ABSENT	A. MAXIMUM DAILY VALUE		B. MAXIMUM 30 DAY VALUE (if available)		C. LONG TERM AVRG. VALUE (if available)		D. NO. OF ANALYSES	A. CONCENTRATION	B. MASS	A. LONG TERM AVRG. VALUE		B. NO. OF ANALYSES
			(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS						
G. Nitrogen Total Organic (as N)		X												
H. Oil and Grease	X							<5.0						
I. Phosphorus (as P) Total (7723-14-0)		X												
J. Sulfate (as SO ₄) (14808-79-6)		X												
K. Sulfide (as S)		X												
L. Sulfite (as SO ₃) (14265-45-3)		X												
M. Surfactants		X												
N. Aluminum Total (7429-90-5)		X												
O. Barium Total (7440-39-3)		X												
P. Boron Total (7440-42-8)		X												
Q. Cobalt Total (7440-48-4)		X												
R. Iron Total (7439-89-6)		X												
S. Magnesium Total (7439-95-4)		X												
T. Molybdenum Total (7439-98-7)		X												
U. Manganese Total (7439-96-5)		X												
V. Tin Total (7440-31-5)		X												
W. Titanium Total (7440-32-6)		X												

1. POLLUTANT AND CAS NUMBER (if available)	2. MARK "X"		3. EFFLUENT						4. UNITS		5. INTAKE (optional)			
	A. BELIEVED PRESENT	B. BELIEVED ABSENT	A. MAXIMUM DAILY VALUE		B. MAXIMUM 30 DAY VALUE (if available)		C. LONG TERM AVRG. VALUE (if available)		D. NO. OF ANALYSES	A. CONCENTRATION	B. MASS	A. LONG TERM AVRG. VALUE		B. NO. OF ANALYSES
			(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS						
METALS, AND TOTAL PHENOLS														
1M. Antimony, Total (7440-36-9)		X												
2M. Beryllium, Total (7440-41-7)		X												
3M. Magnesium, Total (7439-95-4)		X												
4M. Molybdenum, Total (7439-98-7)		X												
5M. Tin, Total (7440-31-5)		X												
6M. Titanium, Total (7440-32-6)		X												
7M. Mercury, Total (7439-97-6)		X												
8M. Selenium, Total (7782-49-2)		X												
9M. Thallium, Total (7440-28-0)		X												
10M. Phenols, Total		X												
RADIOACTIVITY														
(1) Alpha Total		X												
(2) Beta Total		X												
(3) Radium Total		X												
(4) Radium 226 Total		X												

PLEASE PRINT OR TYPE. You may report some or all of this information on separate sheet instead of completing these pages.
 (Use the same format)
 SEE INSTRUCTIONS

FORM C
 TABLE 1 FOR 3.00 ITEM A AND B

INTAKE AND EFFLUENT CHARACTERISTICS		OUTFALL NO. 002	
-------------------------------------	--	--------------------	--

PART A – You must provide the results of at least one analysis for every pollutant in this table. Complete one table for each outfall. See instructions for additional details.

1. POLLUTANT	2. EFFLUENT				3. UNITS (specify if blank)				4. INTAKE (optional)		B. NO. OF ANALYSES	
	A. MAXIMUM DAILY VALUE		B. MAXIMUM 30 DAY VALUE (if available)		C. LONG TERM AVRG. VALUE (if available)		D. NO. OF ANALYSES	A. CONCENTRATION	B. MASS	A. LONG TERM AVRG. VALUE		
	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS				(1) CONCENTRATION		(2) MASS
A. Biochemical Oxygen Demand (BOD)												
B. Chemical Oxygen Demand (COD)					14		152	4	mg/L	lbs		
C. Total organic Carbon (TOC)												
D. Total Suspended Solids (TSS)					5.7		61.7	4	mg/L	lbs		
E. Ammonia (as N)					0.18		1.9	4	mg/L	lbs		
F. Flow	VALUE				VALUE		1,297,000				VALUE	
G. Temperature (winter)	VALUE				VALUE				°C		VALUE	
H. Temperature (summer)	VALUE				VALUE				°C		VALUE	
I. pH	MINIMUM 6.30	MAXIMUM 7.04	MINIMUM	MAXIMUM				4	STANDARD UNITS			

PART B – Mark "X" in column 2-a for each pollutant you know or have reason to believe is present. Mark "X" in column 2-b for each pollutant you believe to be absent. If you mark column 2-a for any pollutant, you must provide the results for at least one analysis for that pollutant. Complete one table for each outfall. See the instructions for additional details and requirements.

1. POLLUTANT AND CAS NUMBER (if available)	2. MARK "X"		3. EFFLUENT				4. UNITS				5. INTAKE (optional)		B. NO. OF ANALYSES	
	A. BELIEVED PRESENT	B. BELIEVED ABSENT	A. MAXIMUM DAILY VALUE		B. MAXIMUM 30 DAY VALUE (if available)		C. LONG TERM AVRG. VALUE (if available)		D. NO. OF ANALYSES	A. CONCENTRATION	B. MASS	A. LONG TERM AVRG. VALUE		
			(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS				(1) CONCENTRATION		(2) MASS
A. Bromide (24959-67-9)		X												
B. Chlorine Total Residual		X												
C. Color		X												
D. Fecal Coliform		X												
E. Fluoride (16984-48-8)		X												
F. Nitrate-Nitrate (as N)	X						1.2	13	4	mg/L	lbs			

1. POLLUTANT AND CAS NUMBER (if available)	2. MARK "X"		3. EFFLUENT						4. UNITS			5. INTAKE (optional)		
	A. BELIEVED PRESENT	B. BELIEVED ABSENT	A. MAXIMUM DAILY VALUE		B. MAXIMUM 30 DAY VALUE (if available)		C. LONG TERM AVRG. VALUE (if available)		D. NO. OF ANALYSES	A. CONCENTRATION	B. MASS	A. LONG TERM AVRG. VALUE		B. NO. OF ANALYSES
			(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS						
G. Nitrogen Total Organic (as N)		X												
H. Oil and Grease	X													
I. Phosphorus (as P) Total (7723-14-0)		X												
J. Sulfate (as SO ₄) (14808-79-8)		X												
K. Sulfide (as S)		X												
L. Sulfite (as SO ₃) (14265-45-3)		X												
M. Surfactants		X												
N. Aluminum Total (7429-90-5)		X												
O. Barium Total (7440-39-3)		X												
P. Boron Total (7440-42-8)		X												
Q. Cobalt Total (7440-48-4)		X												
R. Iron Total (7439-89-6)		X												
S. Magnesium Total (7439-95-4)		X												
T. Molybdenum Total (7439-98-7)		X												
U. Manganese Total (7439-96-5)		X												
V. Tin Total (7440-31-5)		X												
W. Titanium Total (7440-32-6)		X												

1. POLLUTANT AND CAS NUMBER (if available)	2. MARK "X"		3. EFFLUENT						4. UNITS		5. INTAKE (optional)			
	A. BELIEVED PRESENT	B. BELIEVED ABSENT	A. MAXIMUM DAILY VALUE		B. MAXIMUM 30 DAY VALUE (if available)		C. LONG TERM AVRG. VALUE (if available)		D. NO. OF ANALYSES	A. CONCENTRATION	B. MASS	A. LONG TERM AVRG. VALUE		B. NO. OF ANALYSES
			(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS						
METALS, AND TOTAL PHENOLS														
1M. Antimony, Total (7440-36-9)		X												
2M. Beryllium, Total (7440-41-7)		X												
3M. Magnesium, Total (7439-95-4)		X												
4M. Molybdenum, Total (7439-98-7)		X												
5M. Tin, Total (7440-31-5)		X												
6M. Titanium, Total (7440-32-6)		X												
7M. Mercury, Total (7439-97-6)		X												
8M. Selenium, Total (7782-49-2)		X												
9M. Thallium, Total (7440-28-0)		X												
10M. Phenols, Total		X												
RADIOACTIVITY														
(1) Alpha Total		X												
(2) Beta Total		X												
(3) Radium Total		X												
(4) Radium 226 Total		X												

PLEASE PRINT OR TYPE. You may report some or all of this information on separate sheet instead of completing these pages.
 (Use the same format)
 SEE INSTRUCTIONS

FORM C
 TABLE 1 FOR 3.00 ITEM A AND B

INTAKE AND EFFLUENT CHARACTERISTICS										OUTFALL NO. 003
-------------------------------------	--	--	--	--	--	--	--	--	--	--------------------

PART A – You must provide the results of at least one analysis for every pollutant in this table. Complete one table for each outfall. See instructions for additional details.

1. POLLUTANT	2. EFFLUENT				3. UNITS (specify if blank)				4. INTAKE (optional)			
	A. MAXIMUM DAILY VALUE		B. MAXIMUM 30 DAY VALUE (if available)		C. LONG TERM AVRG. VALUE (if available)		D. NO. OF ANALYSES	A. CONCENTRATION	B. MASS	A. LONG TERM AVRG. VALUE		B. NO. OF ANALYSES
(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION				(2) MASS		
A. Biochemical Oxygen Demand (BOD)												
B. Chemical Oxygen Demand (COD)					13.2	246	4	mg/L	lbs			
C. Total organic Carbon (TOC)												
D. Total Suspended Solids (TSS)					11.3	210	4	mg/L	lbs			
E. Ammonia (as N)					<0.10		4	mg/L	lbs			
F. Flow	VALUE				VALUE	2,230,000				VALUE		
G. Temperature (winter)	VALUE				VALUE					VALUE		
H. Temperature (summer)	VALUE				VALUE					VALUE		
I. pH	MINIMUM 6.63	MAXIMUM 7.20	MINIMUM	MAXIMUM			4	STANDARD UNITS				

PART B – Mark "X" in column 2-a for each pollutant you know or have reason to believe is present. Mark "X" in column 2-b for each pollutant you believe to be absent. If you mark column 2-a for any pollutant, you must provide the results for at least one analysis for that pollutant. Complete one table for each outfall. See the instructions for additional details and requirements.

1. POLLUTANT AND CAS NUMBER (if available)	2. MARK "X"		3. EFFLUENT				4. UNITS				5. INTAKE (optional)			
	A. BELIEVED PRESENT	B. BELIEVED ABSENT	A. MAXIMUM DAILY VALUE		B. MAXIMUM 30 DAY VALUE (if available)		C. LONG TERM AVRG. VALUE (if available)		D. NO. OF ANALYSES	A. CONCENTRATION	B. MASS	A. LONG TERM AVRG. VALUE		B. NO. OF ANALYSES
(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION				(2) MASS		
A. Bromide (24959-67-9)		X												
B. Chlorine Total Residual		X												
C. Color		X												
D. Fecal Coliform		X												
E. Fluoride (16984-48-8)		X												
F. Nitrate—Nitrate (as N)	X							0.35	6.5	4	mg/L	lbs		

1. POLLUTANT AND CAS NUMBER (if available)	2. MARK "X"		3. EFFLUENT						4. UNITS		5. INTAKE (optional)			
	A. BELIEVED PRESENT	B. BELIEVED ABSENT	A. MAXIMUM DAILY VALUE		B. MAXIMUM 30 DAY VALUE (if available)		C. LONG TERM AVRG. VALUE (if available)		D. NO. OF ANALYSES	A. CONCENTRATION	B. MASS	A. LONG TERM AVRG. VALUE		B. NO. OF ANALYSES
			(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS						
G. Nitrogen Total Organic (as N)		X												
H. Oil and Grease	X													
I. Phosphorus (as P) Total (7723-14-0)		X												
J. Sulfate (as SO ₄) (14808-79-8)		X												
K. Sulfide (as S)		X												
L. Sulfite (as SO ₃) (14265-45-3)		X												
M. Surfactants		X												
N. Aluminum Total (7429-90-5)		X												
O. Barium Total (7440-39-3)		X												
P. Boron Total (7440-42-8)		X												
Q. Cobalt Total (7440-48-4)		X												
R. Iron Total (7439-89-6)		X												
S. Magnesium Total (7439-95-4)		X												
T. Molybdenum Total (7439-98-7)		X												
U. Manganese Total (7439-96-5)		X												
V. Tin Total (7440-31-5)		X												
W. Titanium Total (7440-32-6)		X												

1. POLLUTANT AND CAS NUMBER (if available)	2. MARK "X"		3. EFFLUENT						4. UNITS			5. INTAKE (optional)		
	A. BELIEVED PRESENT	B. BELIEVED ABSENT	A. MAXIMUM DAILY VALUE		B. MAXIMUM 30 DAY VALUE (if available)		C. LONG TERM AVRG. VALUE (if available)		D. NO. OF ANALYSES	A. CONCENTRATION	B. MASS	A. LONG TERM AVRG. VALUE		B. NO. OF ANALYSES
			(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS						
METALS, AND TOTAL PHENOLS														
1M. Antimony, Total (7440-36-9)		X												
2M. Beryllium, Total (7440-41-7)		X												
3M. Magnesium, Total (7439-95-4)		X												
4M. Molybdenum, Total (7439-98-7)		X												
5M. Tin, Total (7440-31-5)		X												
6M. Titanium, Total (7440-32-6)		X												
7M. Mercury, Total (7439-97-6)		X												
8M. Selenium, Total (7782-49-2)		X												
9M. Thallium, Total (7440-28-0)		X												
10M. Phenols, Total		X												
RADIOACTIVITY														
(1) Alpha Total		X												
(2) Beta Total		X												
(3) Radium Total		X												
(4) Radium 226 Total		X												

PLEASE PRINT OR TYPE. You may report some or all of this information on separate sheet instead of completing these pages.
(Use the same format)
SEE INSTRUCTIONS

FORM C
TABLE 1 FOR 3.00 ITEM A AND B

INTAKE AND EFFLUENT CHARACTERISTICS										OUTFALL NO. 004
-------------------------------------	--	--	--	--	--	--	--	--	--	--------------------

PART A - You must provide the results of at least one analysis for every pollutant in this table. Complete one table for each outfall. See instructions for additional details.												
1. POLLUTANT	2. EFFLUENT						3. UNITS (specify, if blank)				4. INTAKE (optional)	
	A. MAXIMUM DAILY VALUE		B. MAXIMUM 30 DAY VALUE (if available)		C. LONG TERM AVRG. VALUE (if available)		D. NO. OF ANALYSES	A. CONCENTRATION	B. MASS	A. LONG TERM AVRG. VALUE		B. NO. OF ANALYSES
	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS				(1) CONCENTRATION	(2) MASS	
A. Biochemical Oxygen Demand (BOD)												
B. Chemical Oxygen Demand (COD)						9.1	4	mg/L	lbs			
C. Total organic Carbon (TOC)												
D. Total Suspended Solids (TSS)						5.6	4	mg/L	lbs			
E. Ammonia (as N)						0.16	4	mg/L	lbs			
F. Flow	VALUE					VALUE 1,783,000				VALUE		
G. Temperature (winter)	VALUE					VALUE		°C		VALUE		
H. Temperature (summer)	VALUE					VALUE		°C		VALUE		
I. pH	MINIMUM 6.65	MAXIMUM 7.67					4		STANDARD UNITS			

PART B - Mark "X" in column 2-a for each pollutant you know or have reason to believe is present. Mark "X" in column 2-b for each pollutant you believe to be absent. If you mark column 2-a for any pollutant, you must provide the results for at least one analysis for that pollutant. Complete one table for each outfall. See the instructions for additional details and requirements.

1. POLLUTANT AND CAS NUMBER (if available)	2. MARK "X"		3. EFFLUENT				4. UNITS				5. INTAKE (optional)			
	A. BELIEVED PRESENT	B. BELIEVED ABSENT	A. MAXIMUM DAILY VALUE		B. MAXIMUM 30 DAY VALUE (if available)		C. LONG TERM AVRG. VALUE (if available)		D. NO. OF ANALYSES	A. CONCENTRATION	B. MASS	A. LONG TERM AVRG. VALUE		B. NO. OF ANALYSES
			(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS				(1) CONCENTRATION	(2) MASS	
A. Bromide (24959-67-9)		X												
B. Chlorine Total Residual		X												
C. Color		X												
D. Fecal Coliform		X												
E. Fluoride (16984-48-8)		X												
F. Nitrate-Nitrate (as N)	X							1.05	15.6	4	mg/L	lbs		

1. POLLUTANT AND CAS NUMBER (if available)	2. MARK "X"		3. EFFLUENT						4. UNITS		5. INTAKE (optional)			
	A. BELIEVED PRESENT	B. BELIEVED ABSENT	A. MAXIMUM DAILY VALUE		B. MAXIMUM 30 DAY VALUE (if available)		C. LONG TERM AVRG. VALUE (if available)		D. NO. OF ANALYSES	A. CONCENTRATION	B. MASS	A. LONG TERM AVRG. VALUE		B. NO. OF ANALYSES
			(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS						
G. Nitrogen Total Organic (as N)		X												
H. Oil and Grease	X							<5.0	4	mg/L				
I. Phosphorus (as P) Total (7723-14-0)		X												
J. Sulfate (as SO ₄) (14808-79-8)		X												
K. Sulfide (as S)		X												
L. Sulfite (as SO ₃) (14265-45-3)		X												
M. Surfactants		X												
N. Aluminum Total (7429-90-5)		X												
O. Barium Total (7440-39-3)		X												
P. Boron Total (7440-42-8)		X												
Q. Cobalt Total (7440-48-4)		X												
R. Iron Total (7439-89-6)		X												
S. Magnesium Total (7439-95-4)		X												
T. Molybdenum Total (7439-98-7)		X												
U. Manganese Total (7439-96-5)		X												
V. Tin Total (7440-31-5)		X												
W. Titanium Total (7440-32-6)		X												

1. POLLUTANT AND CAS NUMBER (if available)	2. MARK "X"		3. EFFLUENT				4. UNITS			6. INTAKE (optional)			
	A. BELIEVED PRESENT	B. BELIEVED ABSENT	A. MAXIMUM DAILY VALUE		B. MAXIMUM 30 DAY VALUE		C. LONG TERM AVRG. VALUE		A. CONCENTRATION	B. MASS	A. LONG TERM AVRG. VALUE		B. NO. OF ANALYSES
			(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS	(if available)	(1) CONCENTRATION			(2) MASS	(1) CONCENTRATION	
METALS, AND TOTAL PHENOLS													
1M. Antimony, Total (7440-36-9)		X											
2M. Beryllium, Total (7440-41-7)		X											
3M. Magnesium, Total (7439-95-4)		X											
4M. Molybdenum, Total (7439-98-7)		X											
5M. Tin, Total (7440-31-5)		X											
6M. Titanium, Total (7440-32-6)		X											
7M. Mercury, Total (7439-97-6)		X											
8M. Selenium, Total (7782-49-2)		X											
9M. Thallium, Total (7440-28-0)		X											
10M. Phenols, Total		X											
RADIOACTIVITY													
(1) Alpha Total		X											
(2) Beta Total		X											
(3) Radium Total		X											
(4) Radium 226 Total		X											

PLEASE PRINT OR TYPE. You may report some or all of this information on separate sheet instead of completing these pages.
 (Use the same format)
 SEE INSTRUCTIONS

FORM C
 TABLE 1 FOR 3.00 ITEM A AND B

INTAKE AND EFFLUENT CHARACTERISTICS		OUTFALL NO. 005	
-------------------------------------	--	--------------------	--

PART A - You must provide the results of at least one analysis for every pollutant in this table. Complete one table for each outfall. See instructions for additional details.

1. POLLUTANT	2. EFFLUENT				3. UNITS (specify, if blank)				4. INTAKE (optional)		B. NO. OF ANALYSES	
	A. MAXIMUM DAILY VALUE		B. MAXIMUM 30 DAY VALUE (if available)		C. LONG TERM AVRG. VALUE (if available)		D. NO. OF ANALYSES	A. CONCEN-TRATION	B. MASS	A. LONG TERM AVRG. VALUE		
	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS						(1) CONCENTRATION
A. Biochemical Oxygen Demand (BOD)												
B. Chemical Oxygen Demand (COD)												
C. Total organic Carbon (TOC)												
D. Total Suspended Solids (TSS)					8.2	28.6	3	mg/L	lbs			
E. Ammonia (as N)												
F. Flow	VALUE		VALUE		VALUE	417,000				VALUE		
G. Temperature (winter)	VALUE		VALUE		VALUE			°C		VALUE		
H. Temperature (summer)	VALUE		VALUE		VALUE			°C		VALUE		
I. pH	MINIMUM 7.11	MAXIMUM 8.18	MINIMUM	MAXIMUM			3	STANDARD UNITS				

PART B - Mark "X" in column 2-a for each pollutant you know or have reason to believe is present. Mark "X" in column 2-b for each pollutant you believe to be absent. If you mark column 2-a for any pollutant, you must provide the results for at least one analysis for that pollutant. Complete one table for each outfall. See the instructions for additional details and requirements.

1. POLLUTANT AND CAS NUMBER (if available)	2. MARK "X"		3. EFFLUENT				4. UNITS				5. INTAKE (optional)		B. NO. OF ANALYSES	
	A. BELIEVED PRESENT	B. BELIEVED ABSENT	A. MAXIMUM DAILY VALUE		B. MAXIMUM 30 DAY VALUE (if available)		C. LONG TERM AVRG. VALUE (if available)		D. NO. OF ANALYSES	A. CONCEN-TRATION	B. MASS	A. LONG TERM AVRG. VALUE		
			(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS						(1) CONCENTRATION
A. Bromide (24959-67-9)		X												
B. Chlorine Total Residual		X												
C. Color		X												
D. Fecal Coliform		X												
E. Fluoride (16984-48-8)		X												
F. Nitrate-Nitrate (as N)		X												

1. POLLUTANT AND CAS NUMBER (if available)	2. MARK "X"		3. EFFLUENT						4. UNITS			5. INTAKE (optional)		
	A. BELIEVED PRESENT	B. BELIEVED ABSENT	A. MAXIMUM DAILY VALUE		B. MAXIMUM 30 DAY VALUE (if available)		C. LONG TERM AVRG. VALUE (if available)		D. NO. OF ANALYSES	A. CONCENTRATION	B. MASS	A. LONG TERM AVRG. VALUE		B. NO. OF ANALYSES
			(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS						
G. Nitrogen Total Organic (as N)		X												
H. Oil and Grease	X								3					
I. Phosphorus (as P) Total (7723-14-0)		X												
J. Sulfate (as SO ₄) (14808-79-8)		X												
K. Sulfide (as S)		X												
L. Sulfite (as SO ₃) (14265-45-3)		X												
M. Surfactants		X												
N. Aluminum Total (7429-90-5)		X												
O. Barium Total (7440-39-3)		X												
P. Boron Total (7440-42-8)		X												
Q. Cobalt Total (7440-48-4)		X												
R. Iron Total (7439-89-6)		X												
S. Magnesium Total (7439-95-4)		X												
T. Molybdenum Total (7439-98-7)		X												
U. Manganese Total (7439-96-5)		X												
V. Tin Total (7440-31-5)		X												
W. Titanium Total (7440-32-6)		X												

1. POLLUTANT AND CAS NUMBER (if available)	2. MARK "X"		3. EFFLUENT						4. UNITS			5. INTAKE (optional)		
	A. BELIEVED PRESENT	B. BELIEVED ABSENT	A. MAXIMUM DAILY VALUE		B. MAXIMUM 30 DAY VALUE (if available)		C. LONG TERM AVRG. VALUE (if available)		D. NO. OF ANALYSES	A. CONCENTRATION	B. MASS	A. LONG TERM AVRG. VALUE		B. NO. OF ANALYSES
			(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS						
METALS, AND TOTAL PHENOLS														
1M. Antimony, Total (7440-36-9)		X												
2M. Beryllium, Total (7440-41-7)		X												
3M. Magnesium, Total (7439-95-4)		X												
4M. Molybdenum, Total (7439-98-7)		X												
5M. Tin, Total (7440-31-5)		X												
6M. Titanium, Total (7440-32-6)		X												
7M. Mercury, Total (7439-97-6)		X												
8M. Selenium, Total (7782-49-2)		X												
9M. Thallium, Total (7440-28-0)		X												
10M. Phenols, Total		X												
RADIOACTIVITY														
(1) Alpha Total		X												
(2) Beta Total		X												
(3) Radium Total		X												
(4) Radium 226 Total		X												

PLEASE PRINT OR TYPE. You may report some or all of this information on separate sheet instead of completing these pages.
 (Use the same format)
 SEE INSTRUCTIONS

FORM C
 TABLE 1 FOR 3.00 ITEM A AND B

OUTFALL NO.
 006

INTAKE AND EFFLUENT CHARACTERISTICS

PART A - You must provide the results of at least one analysis for every pollutant in this table. Complete one table for each outfall. See instructions for additional details.

1. POLLUTANT	2. EFFLUENT				3. UNITS (specify if blank)				4. INTAKE (optional)		B. NO. OF ANALYSES	
	A. MAXIMUM DAILY VALUE		B. MAXIMUM 30 DAY VALUE (if available)		C. LONG TERM AVRG. VALUE (if available)		D. NO. OF ANALYSES	A. CONCENTRATION	B. MASS	A. LONG TERM AVRG. VALUE		
	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS				(1) CONCENTRATION		(2) MASS
A. Biochemical Oxygen Demand (BOD)												
B. Chemical Oxygen Demand (COD)												
C. Total organic Carbon (TOC)												
D. Total Suspended Solids (TSS)			0.10		0.005		3	mg/L	lbs			
E. Ammonia (as N)												
F. Flow	VALUE				VALUE					VALUE		
G. Temperature (winter)	VALUE				VALUE			°C		VALUE		
H. Temperature (summer)	VALUE				VALUE			°C		VALUE		
I. pH	MINIMUM 6.70	MAXIMUM 7.60		MINIMUM	MAXIMUM		3	STANDARD UNITS				

PART B - Mark "X" in column 2-a for each pollutant you know or have reason to believe is present. Mark "X" in column 2-b for each pollutant you believe to be absent. If you mark column 2-a for any pollutant, you must provide the results for at least one analysis for that pollutant. Complete one table for each outfall. See the instructions for additional details and requirements.

1. POLLUTANT AND CAS NUMBER (if available)	2. MARK "X"		3. EFFLUENT				4. UNITS				5. INTAKE (optional)		B. NO. OF ANALYSES	
	A. BELIEVED PRESENT	B. BELIEVED ABSENT	A. MAXIMUM DAILY VALUE		B. MAXIMUM 30 DAY VALUE (if available)		C. LONG TERM AVRG. VALUE (if available)		D. NO. OF ANALYSES	A. CONCENTRATION	B. MASS	A. LONG TERM AVRG. VALUE		
			(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS				(1) CONCENTRATION		(2) MASS
A. Bromide (24959-67-9)		X												
B. Chlorine Total Residual		X												
C. Color		X												
D. Fecal Coliform		X												
E. Fluoride (16984-48-8)		X												
F. Nitrate-Nitrate (as N)		X												

1. POLLUTANT AND CAS NUMBER (if available)	2. MARK "X"		3. EFFLUENT						4. UNITS		5. INTAKE (optional)			
	A. BELIEVED PRESENT	B. BELIEVED ABSENT	A. MAXIMUM DAILY VALUE		B. MAXIMUM 30 DAY VALUE (if available)		C. LONG TERM AVRG. VALUE (if available)		D. NO. OF ANALYSES	A. CONCENTRATION	B. MASS	A. LONG TERM AVRG. VALUE		B. NO. OF ANALYSES
			(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS						
G. Nitrogen Total Organic (as N)		X												
H. Oil and Grease	X							<6.0	3	mg/L				
I. Phosphorus (as P) Total (7723-14-0)		X												
J. Sulfate (as SO ₄) (14808-79-8)		X												
K. Sulfide (as S)		X												
L. Sulfite (as SO ₃) (14265-45-3)		X												
M. Surfactants		X												
N. Aluminum Total (7429-90-5)		X												
O. Barium Total (7440-39-3)		X												
P. Boron Total (7440-42-8)		X												
Q. Cobalt Total (7440-48-4)		X												
R. Iron Total (7439-89-6)		X												
S. Magnesium Total (7439-95-4)		X												
T. Molybdenum Total (7439-98-7)		X												
U. Manganese Total (7439-96-5)		X												
V. Tin Total (7440-31-5)		X												
W. Titanium Total (7440-32-6)		X												

1. POLLUTANT AND CAS NUMBER (if available)	2. MARK "X"		3. EFFLUENT						4. UNITS			5. INTAKE (optional)		
	A. BELIEVED PRESENT	B. BELIEVED ABSENT	A. MAXIMUM DAILY VALUE (if available)		B. MAXIMUM 30 DAY VALUE (if available)		C. LONG TERM AVRG. VALUE (if available)		D. NO. OF ANALYSES	A. CONCENTRATION	B. MASS	A. LONG TERM AVRG. VALUE		B. NO. OF ANALYSES
			(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS	(1) CONCENTRATION	(2) MASS						
METALS, AND TOTAL PHENOLS														
1M. Antimony, Total (7440-36-9)		X												
2M. Beryllium, Total (7440-41-7)		X												
3M. Magnesium, Total (7439-95-4)		X												
4M. Molybdenum, Total (7439-98-7)		X												
5M. Tin, Total (7440-31-5)		X												
6M. Titanium, Total (7440-32-6)		X												
7M. Mercury, Total (7439-97-6)		X												
8M. Selenium, Total (7782-49-2)		X												
9M. Thallium, Total (7440-28-0)		X												
10M. Phenols, Total		X												
RADIOACTIVITY														
(1) Alpha Total		X												
(2) Beta Total		X												
(3) Radium Total		X												
(4) Radium 226 Total		X												

Please print or type in the unshaded areas only.

FORM
2F
NPDES



U.S. Environmental Protection Agency
Washington, DC 20460

**Application for Permit to Discharge Storm Water
Discharges Associated with Industrial Activity**

Paperwork Reduction Act Notice

Public reporting burden for this application is estimated to average 28.6 hours per application, including time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding the burden estimate, any other aspect of this collection of information, or suggestions for improving this form, including suggestions which may increase or reduce this burden to: Chief, Information Policy Branch, PM-223, U.S. Environmental Protection Agency, 1200 Pennsylvania Avenue, NW, Washington, DC 20460, or Director, Office of Information and Regulatory Affairs, Office of Management and Budget, Washington, DC 20503.

I. Outfall Location

For each outfall, list the latitude and longitude of its location to the nearest 15 seconds and the name of the receiving water.

A. Outfall Number (list)	B. Latitude			C. Longitude			D. Receiving Water (name)
001	37.00	14.00	41.00	93.00	23.00	49.00	UNNAMED TRIBUTARY OF RAINIER BRANCH
002	37.00	14.00	19.00	93.00	23.00	27.00	UNNAMED TRIBUTARY OF RAINIER BRANCH
003	37.00	15.00	14.00	93.00	22.00	54.00	SINKHOLE
004	37.00	15.00	12.00	93.00	22.00	45.00	SINKHOLE
005	37.00	14.00	30.00	93.00	24.00	10.00	SINKHOLE
006	37.00	15.00	13.00	93.00	22.00	35.00	UNNAMED TRIBUTARY OF RAINIER BRANCH

II. Improvements

A. Are you now required by any Federal, State, or local authority to meet any implementation schedule for the construction, upgrading or operation of wastewater treatment equipment or practices or any other environmental programs which may affect the discharges described in this application? This includes, but is not limited to, permit conditions, administrative or enforcement orders, enforcement compliance schedule letters, stipulations, court orders, and grant or loan conditions.

1. Identification of Conditions, Agreements, Etc.	2. Affected Outfalls		3. Brief Description of Project	4. Final Compliance Date	
	number	source of discharge		a. req.	b. proj.
MO OPERATING PERMIT	001	STORMWATER	MONITORING		
MO-0134830	002	STORMWATER	MONITORING		
	003	STORMWATER	MONITORING		
	004	STORMWATER	MONITORING		
	005	STORMWATER	MONITORING		
	006	STORMWATER	MONITORING		

B: You may attach additional sheets describing any additional water pollution (or other environmental projects which may affect your discharges) you now have under way or which you plan. Indicate whether each program is now under way or planned, and indicate your actual or planned schedules for construction.

III. Site Drainage Map

Attach a site map showing topography (or indicating the outline of drainage areas served by the outfalls(s) covered in the application if a topographic map is unavailable) depicting the facility including: each of its intake and discharge structures; the drainage area of each storm water outfall; paved areas and buildings within the drainage area of each storm water outfall, each known past or present areas used for outdoor storage of disposal of significant materials, each existing structural control measure to reduce pollutants in storm water runoff, materials loading and access areas, areas where pesticides, herbicides, soil conditioners and fertilizers are applied; each of its hazardous waste treatment, storage or disposal units (including each area not required to have a RCRA permit which is used for accumulating hazardous waste under 40 CFR 262.34); each well where fluids from the facility are injected underground; springs, and other surface water bodies which received storm water discharges from the facility.

IV. Narrative Description of Pollutant Sources

A. For each outfall, provide an estimate of the area (include units) of impervious surfaces (including paved areas and building roofs) drained to the outfall, and an estimate of the total surface area drained by the outfall.

Outfall Number	Area of Impervious Surface (provide units)	Total Area Drained (provide units)	Outfall Number	Area of Impervious Surface (provide units)	Total Area Drained (provide units)
001	74 ACRES	372 ACRES	006	1	2.2
002	56 ACRES	125 ACRES			
003	14 ACRES	47 ACRES			
004	93 ACRES	155 ACRES			
005	22 ACRES	27.5 ACRES			

B. Provide a narrative description of significant materials that are currently or in the past three years have been treated, stored or disposed in a manner to allow exposure to storm water; method of treatment, storage, or disposal; past and present materials management practices employed to minimize contact by these materials with storm water runoff; materials loading and access areas, and the location, manner, and frequency in which pesticides, herbicides, soil conditioners, and fertilizers are applied.

DE-ICING WITH PROPYLENE GLYCOL, MINOR MAINTENANCE, AND WASHING OF PLANES OCCUR AT THE GATES AND RAMPS.

C. For each outfall, provide the location and a description of existing structural and nonstructural control measures to reduce pollutants in storm water runoff; and a description of the treatment the storm water receives, including the schedule and type of maintenance for control and treatment measures and the ultimate disposal of any solid or fluid wastes other than by discharge.

Outfall Number	Treatment	List Codes from Table 2F-1
001	SEDIMENT BASIN	
002	NONE	
003	NONE	
004	NONE	
005	NONE	
006	SEDIMENT BASIN	

V. Nonstormwater Discharges

A. I certify under penalty of law that the outfall(s) covered by this application have been tested or evaluated for the presence of nonstormwater discharges, and that all nonstormwater discharged from these outfall(s) are identified in either an accompanying Form 2C or From 2E application for the outfall.

Name and Official Title (type or print)	Signature	Date Signed
---	-----------	-------------

B. Provide a description of the method used, the date of any testing, and the onsite drainage points that were directly observed during a test.

VI. Significant Leaks or Spills

Provide existing information regarding the history of significant leaks or spills of toxic or hazardous pollutants at the facility in the last three years, including the approximate date and location of the spill or leak, and the type and amount of material released.

VII. Discharge Information

A, B, C, & D: See instructions before proceeding. Complete one set of tables for each outfall. Annotate the outfall number in the space provided.
Table VII-A, VII-B, VII-C are included on separate sheets numbers VII-1 and VII-2.

E. Potential discharges not covered by analysis – is any toxic pollutant listed in table 2F-2, 2F-3, or 2F-4, a substance or a component of a substance which you currently use or manufacture as an intermediate or final product or byproduct?

Yes (list all such pollutants below)

No (go to Section IX)

OIL AND GREASE
BENZENE
TOLUENE
ETHYLBENZENE
XYLENE
NITRATE

VIII. Biological Toxicity Testing Data

Do you have any knowledge or reason to believe that any biological test for acute or chronic toxicity has been made on any of your discharges or on a receiving water in relation to your discharge within the last 3 years?

Yes (list all such pollutants below)

No (go to Section IX)

IX. Contract Analysis Information

Were any of the analyses reported in Item VII performed by a contract laboratory or consulting firm?

Yes (list the name, address, and telephone number of, and pollutants analyzed by, each such laboratory or firm below)

No (go to Section X)

A. Name	B. Address	C. Area Code & Phone No.	D. Pollutants Analyzed
PDC LABORATORIES, INC	2231 W. ALTOFER DR., PEORIA, IL 61615	(309) 692-9688	COD, TSS, O&G, BTEX, CHLORIDE, AMMONIA, NITRATE, PROPYLENE GLYCOL, SETTLEABLE SOLIDS
PALMERTON & PARRISH, INC.	4168 W. KEARNEY, SPRINGFIELD, MO 65803	(417) 864-6000	pH, FLOW

X. Certification

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.


A. Name & Official Title (Type Or Print)

Shawn Schroeder, Assistant Director of Aviation

B. Area Code and Phone No.

(417) 868-0500

C. Signature



D. Date Signed

11-13-12

November 9, 2012

Missouri Department of Natural Resources
Water Protection Program
PO Box 176
Jefferson City, MO 65102

RE: Springfield Branson National Airport – MO-0134830

On behalf of the Springfield-Branson National Airport, Palmerton & Parrish, Inc. has completed the following for the renewal the above referenced NPDES permit:

- Form A – Application for Construction or Operating Permit
- Form C – Application for Discharge Permit
- EPA Form 2F – Application for Permit to Discharge Storm Water Discharges Associated with Industrial Activity
- 1:2000 scale map showing the airport property and location of all outfalls

Should you have any questions or need additional information, please do not hesitate to contact me at (417) 864-6000 or dnowack@ppimo.com.

Palmerton & Parrish, Inc.



Donald Nowack, P.E., R.G.

RECEIVED

NOV 16 2012

WATER PROTECTION PROGRAM