G02853

OGC # 20030

RELEASED

GREAT GUNS LOGGING
DIGITAL LOG

MICRORESISTIVITY LOG

COMPANY: JAMES K. ANDERSON
WELL: FLETCHER #1
FIELD: WILDCAT
COUNTY: ATCHISON
FILE NO: 043314
STATE: MISSOURI
COUNTRY: USA

LOCATION: 3140 FNL 500 FWL
SEC 15 TWP 63N RGE 40W

DATE: 6/7/87
RUN NO: 1

ELEVATIONS:
KB: 886.0
DF: 0
GL: 881.0

PERMANENT DATUM: GL
DRILLING MEASURED FROM: KB
LOG MEASURED FROM: KB
ABOVE PERMANENT DATUM: 5.0

SERVICES:
GR10 SON
DENS
BCN

DEPTH--DRILLER: 2786.0
DEPTH--LOGGER: 2784.0
BOTTOM LOG INTERVAL: 2782.4
TOP LOG INTERVAL: 297.4

CASING DEPTH--DRILLER: 325.0
CASING DEPTH--LOGGER: 325.0
CASING DIAMETER: 8.625
BIT SIZE: 7.875
UNIT NO: 35
LOCATION: MCLOUTH
RECORDED BY: MCKIM & NITZ
WITNESSED BY: MR RAINER & MR. COOK

RECEIVED
JUL 07 1987
MO Oil & Gas Council
Economic Geology

SOFTWARE VERSION: 3140

THE CUSTOMER IS HEREBY WARNED THAT BY PROVIDING THE LOG DATA HEREIN, GREAT GUNS DOES NOT AGREE TO PROVIDE ANY INTERPRETATION OF LOG DATA, CONVERSION OF LOG DATA TO PHYSICAL ROCK PARAMETERS OR RECOMMENDATIONS. GREAT GUNS DOES NOT GUARANTEE OR WARRANT, EITHER EXPRESSLY OR IMPLIEDLY, THE ACCURACY OF ANY INTERPRETATION OF LOG DATA, CONVERSION OF LOG DATA TO PHYSICAL ROCK PARAMETERS OR RECOMMENDATIONS WHICH MAY BE GIVEN BY GREAT GUNS PERSONNEL. ANY INTERPRETATION, CONVERSION OR RECOMMENDATION IS NOT PART OF THE CONSIDERATION FOR THE AGREEMENT BETWEEN THE PARTIES AND IS NOT PART OF ANY PART OF THE CHARGE BY GREAT GUNS FOR ITS SERVICES. ANY USER OF THE LOG DATA IS WARNED THAT SAID USER IS NOT ENTITLED TO RELY ON INTERPRETATIONS, CONVERSIONS OR RECOMMENDATIONS AS AFORESAID.

DEPTH TO FLUID:	0			
TYPE FLUID IN HOLE:	CHEMICAL			
DENSITY, LB/G:	9.2			
VISCOSITY, CP:	43			
PH:	9.0			
FLUID LOSS, CC:	12.0			
SALINITY, PPM:	2600			
SOURCE OF SAMPLE:				
RM:	1.250	OHM-M AT	78	DEG. F
RMF:	.937	OHM-M AT	78	DEG. F
RMC:	1.500	OHM-M AT	78	DEG. F
SOURCE RMF AND RMC:				
RM AT BHT:	.000	OHM-M AT	98	DEG. F
RMF AT BHT:	.746	OHM-M AT	98	DEG. F
RMC AT BHT:	1.193	OHM-M AT	98	DEG. F
MAX. RECORDED TEMP.:			98	DEG. F
TIME SINCE LAST CIR., HRS.:			2.5	
OPERATING RIG TIME, HRS.:			2.0	

SOURCE SERIAL NUMBERS:

CVS-B42	71-2A-62

SOURCE STRENGTH, CURIES:

.000	.000
2.000	20.000

SONDE SERIAL NUMBERS:

COMMENTS

GAMMA RAY API UNITS 0 – 150; 150 – 300
SP MILLIVOLTS 10.0
MICRO INVERSE OHM-M 0 – 40.0
MICRO NORMAL OHM-M 0 – 40.0

SONDE CALIBRATIONS

GR	200 /	336
MPIR	1.0 /	68.0
MPNR	1.0 /	60.5

GAMMA RAY API UNITS 0 – 150; 150 – 300
SP MILLIVOLTS 10.0
MICRO INVERSE OHM-M 0 – 40.0
MICRO NORMAL OHM-M 0 – 40.0

REPEAT SECTION

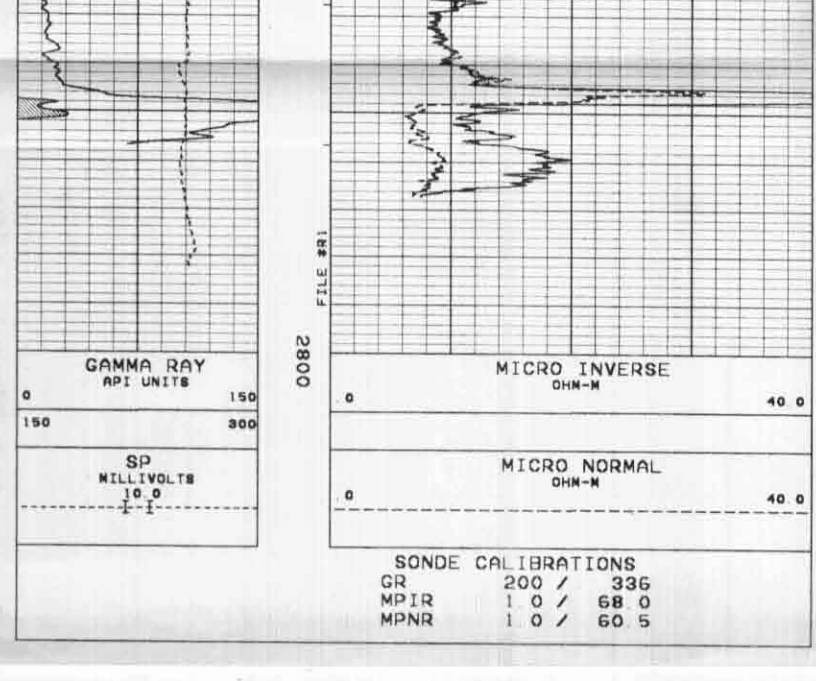

GAMMA RAY API UNITS 0 – 150; 150 – 300
SP MILLIVOLTS 10.0
MICRO INVERSE OHM-M 0 – 40.0
MICRO NORMAL OHM-M 0 – 40.0

SONDE CALIBRATIONS

GR	200 /	336
MPIR	1.0 /	68.0
MPNR	1.0 /	60.5