


RECEIVED

FORM OGC-31

FEB 22 2012

Mo Oil & Gas Council



STATE OF MISSOURI MISSOURI DEPARTMENT OF NATURAL RESOURCES GEOLOGICAL SURVEY PROGRAM INJECTION WELL PERMIT APPLICATION (TO DRILL, DEEPEN, PLUG BACK, OR CONVERT AN EXISTING WELL)

NOTE ► Permit approval for drilling only, not injection. Approval or denial for injection determined after Mechanical Integrity Test results reviewed and official notification given.

[X] APPLICATION TO DRILL [] DEEPEN [] PLUG BACK [] FOR AN OIL WELL [] OR GAS WELL

NAME OF COMPANY OR OPERATOR Kansas Resource Exploration & Development, LLC DATE 02/15/2012

ADDRESS 9393 W 110th Street, Suite 500 CITY Overland Park STATE KS ZIP CODE 66210

DESCRIPTION OF WELL AND LEASE

NAME OF LEASE Belton Unit WELL NUMBER RW-20 ELEVATION (GROUND) 1099 feet

WELL LOCATION (GIVE FOOTAGE FROM SECTION LINES) 5152 ft. from [] North [X] South section line 550 ft. from [X] East [] West section line

WELL LOCATION Sec. 16 Township 46 North Range 33 [] East [X] West LATITUDE N38 48' 54.7" LONGITUDE W94 34 6.9" COUNTY Cass

NEAREST DISTANCE FROM PROPOSED LOCATION TO PROPERTY OR LEASE LINE 302 FEET

DISTANCE FROM PROPOSED LOCATION TO NEAREST DRILLING, COMPLETED OR APPLIED - FOR WELL ON THE SAME LEASE 14.4 FEET

PROPOSED DEPTH 650 feet ROTARY OR CABLE TOOLS Rotary DRILLING CONTRACTOR, NAME AND ADDRESS Utah Oil, LLC APPROX. DATE WORK WILL START 03/01/2012

NUMBER OF ACRES IN LEASE 560 NUMBER OF WELLS ON LEASE INCLUDING THIS WELL, COMPLETED IN OR DRILLING TO THIS RESERVOIR 87 NUMBER OF ABANDONED WELLS ON LEASE 0

IF LEASE PURCHASED WITH ONE OR MORE WELLS DRILLED, FROM WHOM PURCHASED? NO. OF WELLS PRODUCING 50 INJECTION 28 INACTIVE 8 ABANDONED 0

NAME DE Exploration ADDRESS 4595 Highway K33, Wellsville, KS 66092

STATUS OF BOND [] SINGLE WELL AMOUNT \$ [X] BLANKET BOND AMOUNT \$ 80,000 [X] ON FILE [] ATTACHED

REMARKS: (IF THIS IS AN APPLICATION TO DEEPEN OR PLUG BACK, BRIEFLY DESCRIBE WORK TO BE DONE, GIVING PRESENT PRODUCING/INJECTION ZONE AND EXPECTED NEW INJECTION ZONE; USE BACK OF FORM IF NEEDED)

Table with 2 main columns: PROPOSED CASING PROGRAM and APPROVED CASING - TO BE FILLED IN BY STATE GEOLOGIST. Rows include AMOUNT, SIZE, WT/FT, and CEM.

Table with 2 main columns: PROPOSED CASING PROGRAM and APPROVED CASING - TO BE FILLED IN BY STATE GEOLOGIST. Rows include AMOUNT, SIZE, WT/FT, and CEM.

I, the Undersigned, state that I am the COO of the KRED (Company), and that I am authorized by said company to make this report, and that this report was prepared under my supervision and direction and that the facts stated therein are true, correct, and complete to the best of my knowledge.

SIGNATURE [Handwritten Signature] DATE 02/18/2012

PERMIT NUMBER 037-20877 APPROVED DATE 5-9-12 APPROVED BY Joseph A. Millman

[X] DRILLER'S LOG REQUIRED [X] E-LOGS REQUIRED IF RUN [X] CORE ANALYSIS REQUIRED IF RUN [X] DRILL SYSTEM TEST INFO REQUIRED IF RUN [] SAMPLES REQUIRED [X] SAMPLES NOT REQUIRED [] WATER SAMPLES REQUIRED AT

NOTE ► THIS PERMIT NOT TRANSFERABLE TO ANY OTHER PERSON OR TO ANY OTHER LOCATION. APPROVAL OF THIS PERMIT BY THE OIL AND GAS COUNCIL DOES NOT CONSTITUTE ENDORSEMENT OF THE GEOLOGIC MERITS OF THE PROPOSED WELL NOR ENDORSEMENT OF THE QUALIFICATIONS OF THE PERMITTEE

Belton

OK/12 3/6/12

RECEIVED

ONE (1) COPY WILL BE RETURNED.

APR 09 2012

I, _____ of the _____ (Company), confirm that an approved drilling permit has been obtained by the owner of this well. Council approval of this permit will be shown on this form by presence of a permit number and signature of authorized council representative.

Mo Oil & Gas Council

DRILLER'S SIGNATURE

DATE

PROPOSED OPERATIONS DATA

PROPOSED AVERAGE DAILY INJECTION, PRESSURE 300 PSIG, RATE 300 BPD/GPM, VOLUME 100 BBL/GAL

APPROVED AVERAGE DAILY INJECTION, (TO BE FILLED IN BY STATE GEOLOGIST) PRESSURE 300 PSIG, RATE 300 BPD/GPM, VOLUME 100 BBL/GAL

PROPOSED MAXIMUM DAILY INJECTION, PRESSURE 300 PSIG, RATE 300 BPD/GPM, VOLUME 100 BBL/GAL

APPROVED MAXIMUM DAILY INJECTION, (TO BE FILLED IN BY STATE GEOLOGIST) PRESSURE 300 PSIG, RATE 300 BPD/GPM, VOLUME 100 BBL/GAL

ESTIMATED FRACTURE PRESSURE GRADIENT OF INJECTION ZONE 0.4 PSI/FOOT

DESCRIBE THE SOURCE OF THE INJECTION FLUID Squirrel return water and rural water

NOTE ► SUBMIT AN APPROPRIATE ANALYSIS OF THE INJECTION FLUID. (SUBMIT ON SEPARATE SHEET)

DESCRIBE THE COMPATIBILITY OF THE PROPOSED INJECTION FLUID WITH THAT OF THE RECEIVING FORMATIONS, INCLUDING TOTAL DISSOLVED SOLIDS COMPARISONS

We have been using these injection fluids since the waterflood began with no issues. The formations respond to injection fluids. The injection fluids consist of recycled formation water and fresh water.

GIVE AN ACCURATE DESCRIPTION OF THE INJECTION ZONE INCLUDING LITHOLOGIC DESCRIPTIONS, GEOLOGIC NAME, THICKNESS, DEPTH, POROSITY, AND PERMEABILITY.

The upper, middle, and lower Squirrel Sandstone depth ranges from 516-615 feet with an average thickness of 90 feet. The upper Squirrel is generally 30 feet thick with 21% average porosity and 172 millidarcy's average permeability. The middle Squirrel is generally 20 feet thick with 22% average porosity and 1,000 millidarcy's average permeability. The lower Squirrel is generally 40 feet thick with 20.5% average porosity and 593 millidarcy's average permeability

GIVE AN ACCURATE DESCRIPTION OF THE CONFINING ZONES INCLUDING LITHOLOGIC DESCRIPTION, GEOLOGIC NAME, THICKNESS, DEPTH, POROSITY, AND PERMEABILITY.

The confining layers of the Squirrel Sandstone consist of the the Fort Scott group above the sandstone and the Verdigris formation below the sandstone. The Fort Scott contains two prominent shales, the Blackwater Creek and the Excello, as well as the Blackjack Creek limestone that has a total thickness of 30-50 feet. The Verdigris formation consists of the the Ardmore limestone member and the Oakley shale with a total thickness of 20-40 feet. The zones are impermeable at less than 3% porosity.

SUBMIT ALL AVAILABLE LOGGING AND TESTING DATA ON THE WELL

GIVE A DETAILED DESCRIPTION OF ANY WELL NEEDING CORRECTIVE ACTION THAT PENETRATES THE INJECTION ZONE IN THE AREA OF REVIEW (1/2 MILE RADIUS AROUND WELL). INCLUDE THE REASON FOR AND PROPOSED CORRECTIVE ACTION.


No corrective action needed.



STATE OF MISSOURI
MISSOURI DEPARTMENT OF NATURAL RESOURCES
GEOLOGICAL SURVEY PROGRAM
INJECTION WELL SCHEMATIC

OGC-11

COUNTY	PERMIT NUMBER	OPERATOR	WELL NUMBER
Cass		Kansas Resource Exploration & Development	

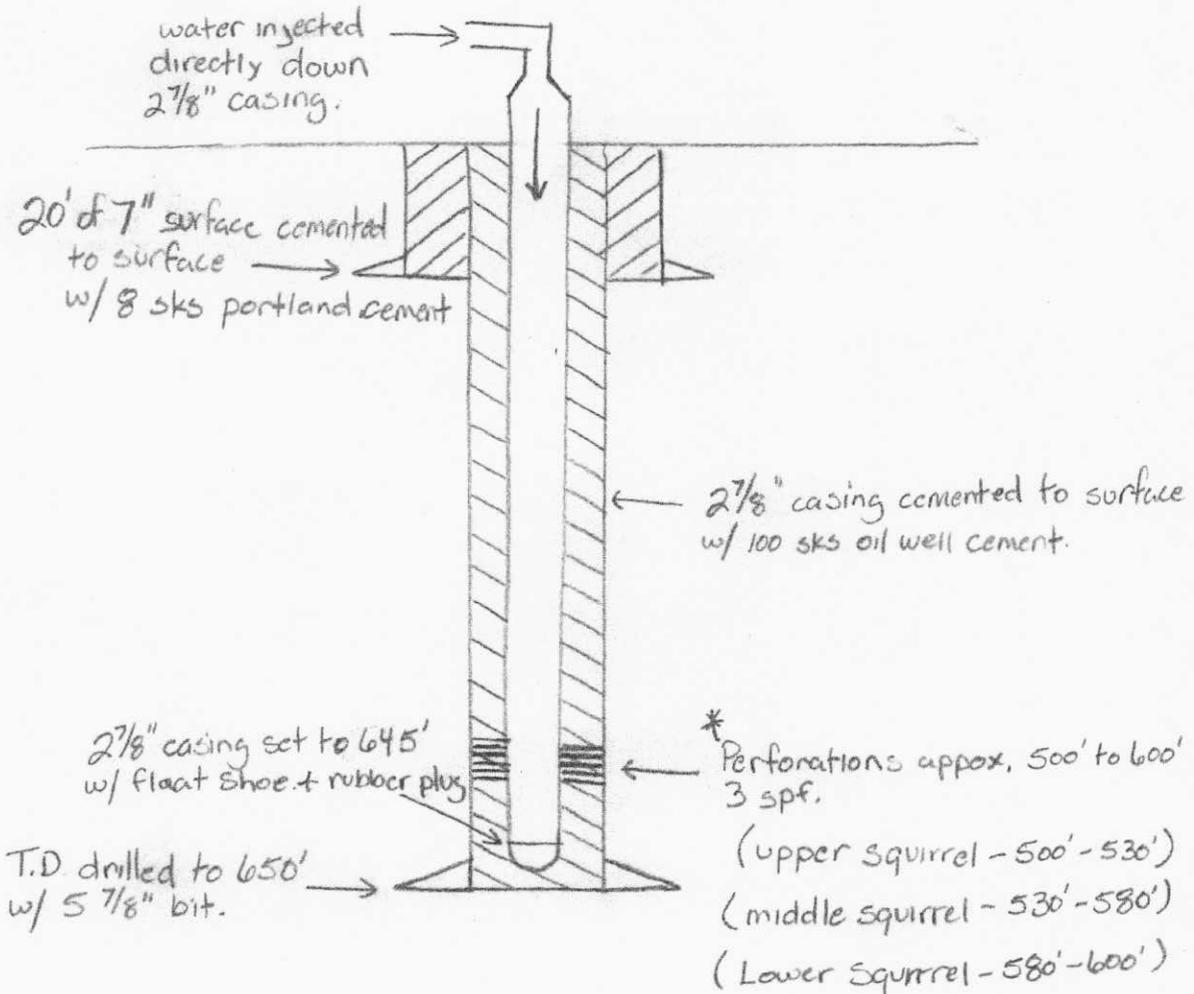

* Upper, middle and lower Squirrel sections confined by shale and limestone.

INSTRUCTIONS ON THE ABOVE SPACE DRAW A NEAT, ACCURATE SCHEMATIC DIAGRAM OF THE APPLICANT INJECTION WELL, INCLUDING THE FOLLOWING: CONFIGURATION OF WELLHEAD, TOTAL DEPTH OR PLUG BACK TOTAL DEPTH, DEPTH OF ALL INJECTION OR DISPOSAL INTERVALS, AND THEIR FORMATION NAMES, LITHOLOGY OF ALL FORMATIONS PENETRATED, DEPTHS OF THE TOPS AND BOTTOMS OF ALL CASING AND TUBING, SIZE AND GRADE OF ALL CASING AND TUBING, AND THE TYPE AND DEPTH OF PACKER, DEPTH, LOCATION, AND TYPE OF ALL CEMENT, DEPTH OF ALL PERFORATIONS AND SQUEEZE JOBS, AND GEOLOGIC NAME AND DEPTH TO BOTTOM OF ALL UNDERGROUND SOURCES OF DRINKING WATER WHICH MAY BE AFFECTED BY THE INJECTION. USE BACK IF ADDITIONAL SPACE IS NEEDED, OR ATTACH SHEET.

RECEIVED

APR 24 2012

Well Schematic, Continued

Mo Oil & Gas Council

The surface casing is 7" in diameter and is new, limited service grade pipe. The 7" is drifted and tested to 7,000 lbs. and weighs 17 lbs. per foot. The surface casing will be set to a minimum depth of 20 feet and extend 6 inches above the surface. Approximately 8 sacks of Portland cement will be circulated to surface and will secure the well and ensure the contents of the well bore is sealed off from sources of drinking water. The production casing is used 2 7/8" EUE upset, drifted and tested to 7,000 lbs. No tubing will be ran in the injection wells, the injection fluid will be injected directly down the 2 7/8" casing. The total depth of the well will be approximately 650 feet drilled with a 5 5/8" bit. A 2 7/8" flapper type float shoe will be set at the base of the 2 7/8" casing pipe (645 feet) with centralizers installed to center the casing inside the well bore for better cement bonding. The 2 7/8" casing will be cemented from 650 feet to surface using a 2 7/8" rubber plug for displacing the cement. Approximately 100 sacks of high-grade Oil Well cement will be used to cement all wells. This cement will ensure that no contents of the pipe will leave the well bore. The top of the 2 7/8" casing will extend approximately one foot above ground level. After the cement has cured and effectively bonded to the 2 7/8" casing, perforations will be made in the Squirrel Sandstone formation from approximately 500-600 feet, depending on where the oil sand is present at this particular location. Wells will be shot with 3 perforations per foot where the squirrel sandstone oil reservoir is present and capable of water injection. No water sources are present at this depth and will not be affected by these perforations or the injection. The relevant sources of drinking water are located less than 20 feet below surface. The 7" surface pipe and durable Portland cement ensures these water sources will remain free from contamination from drilling and injection activity. Other sources of potential usable water may be present, however not always potable, in the Pennsylvanian and Mississippian formations located approximately 150 feet or deeper below the base of the Squirrel Sandstone.

The lithology of all formations penetrated by the wellbore are as follows:

<u>Formation</u>	<u>Total Depth (feet)</u>
Soil	0 – 2
Clay	2 – 6
Lime	6 – 28
Shale	28 – 49
Lime	49 – 64
Shale	64 – 69
Red Bed	69 – 78
Shale	78 – 82

Lime	82 – 87
Shale	87 – 105
Gray Sand	105 – 124
Shale	124 – 128
Lime	128 – 130
Shale	130 – 147
Lime	147 – 177
Shale	177 – 186 (Slate 183 – 184)
Lime	186 – 204
Shale	204 – 209 (Slate 207 – 208)
Lime	209 – 211
Shale	211 – 214
Lime “Hertha”	214 – 220
Shale	220 – 259
Lime	259 – 260
Gray Sand “Knobtown”	260 – 262
Shale	262 – 324
Gray Sand	324 – 329
Shale	329 – 358
Gray Sand (Lamin. w/ Lime)	358 – 362
Shale	362 – 399
Lime	399 – 401
Shale	401 – 404
Lime	404 – 406
Shale (Slate 411 – 412)	406 – 417
Lime (Broken)	417 – 424
Shale	424 – 427
Gray Sand	427 – 431


Shale	431 – 443
Lime	443 – 448
Shale (Shale 452 – 453)	448 – 469
Gray Sand	469 – 471
Sdy. Shale (oil trace)	471 – 501
Very laminated Sand	501 – 502
Sandy Lime	502 – 503
Slightly lamin. Sand	503 – 504
Sandy Lime	504 – 505
Solid Sand	505 – 506.5
Shale	506.5 – 507
Slightly lamin. Sand	507 – 507.5
Sandy Shale	507.5 – 509.5
Solid Sand	509.5 – 510.5
Sandy Lime	510.5 – 511.5
Solid Sand	511.5 – 515.5
Sandy Lime	515.5 – 518
Solid Sand	518 – 520
Sandy Lime	520 – 521
Solid Sand	521 – 525
Sandy Lime	525 – 526
Laminated Sand	526 – 527
Sandy Shale	527 – 528.5
Sandy Lime	528.5 – 530
Solid Sand	530 – 533
Sandy Lime	533 – 534
Sandy Shale	534 – 535
Slightly laminated Sand	535 – 536.5

Sandy Lime	536.5 – 538
Solid Sand	538 – 539
Lime and Shells	539 – 541
Sand lamin. w/ Sandy Lime	541 – 542
Lime and Shells	542 – 543
Solid Sand	543 – 544.5
Sandy Lime and Shells	544.5 – 547.5
Sand and Shells	547.5 – 548.5
Lime and Shells	548.5 – 552
Solid Sand	552 – 553
Lime and Shells	553 – 555.5
Sand and Shells	555.5 – 559.5
Lime and Shells	559.5 – 563.5
Solid Sand	563.5 – 582.5
Slightly laminated	582.5 – 583.5
Shale and Shells	583.5 – 587.5
Solid Sand	587.5 – 590.5
Sand and Shells	590.5 – 591.5
Solid Sand	591.5 – 593
Lime	593 – 593.5
Very laminated Sand	593.5 – 596
Shale	596 – 616 (Slate 610 – 611)
Lime	616 – 617
Shale	617 – 650 (Slate 621 – 622)

RECEIVED

FORM OGC-41

FEB 22 2012



STATE OF MISSOURI
MISSOURI DEPARTMENT OF NATURAL RESOURCES
GEOLOGICAL SURVEY PROGRAM
INJECTION WELL LOCATION PLAT

Mo Oil & Gas Council

OWNER'S NAME
Kansas Resource Exploration & Development, LLC (K.R.E.D)

LEASE NAME
Belton Unit


COUNTY
Cass

WELL LOCATION (GIVE FOOTAGE FROM SECTION LINES)
5152 ft. from North South section line 550 ft. from East West section line

WELL LOCATION
Sec. 16 Township 46 North Range 33 East West

LATITUDE "56.7"
N38 48.9450'

LONGITUDE "6.9"
W94 34.1160'

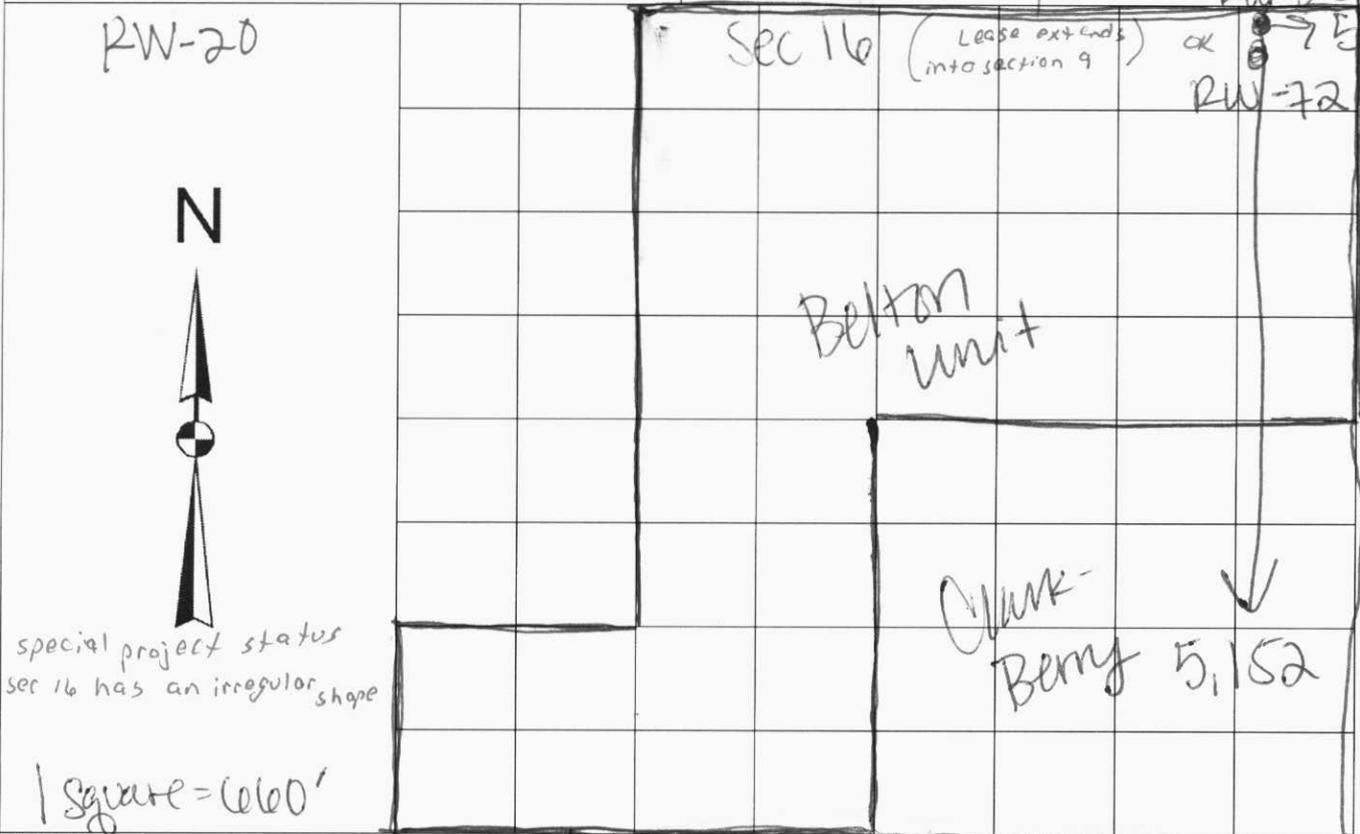

special project status
* sec 16 has an irregular shape

1 square = 6600'

REMARKS
The lease is ~~1.1~~ 1.1 miles N. to S.


INSTRUCTIONS

On the above plat, show distance of the proposed well from the two nearest section lines, the nearest lease line, and from the nearest well on the same lease completed in or drilling to the same reservoir. Do not confuse survey lines with lease lines. See rule 10 CSR 50-2.030 for survey requirements. Lease lines must be marked.

This is to certify that I have executed a survey to accurately locate oil and gas wells in accordance with 10 CSR 50-2.030 and that the results are correctly shown on the above plat.

REGISTERED LAND SURVEY NUMBER

Belton Unit and Clark-Berry - 2011

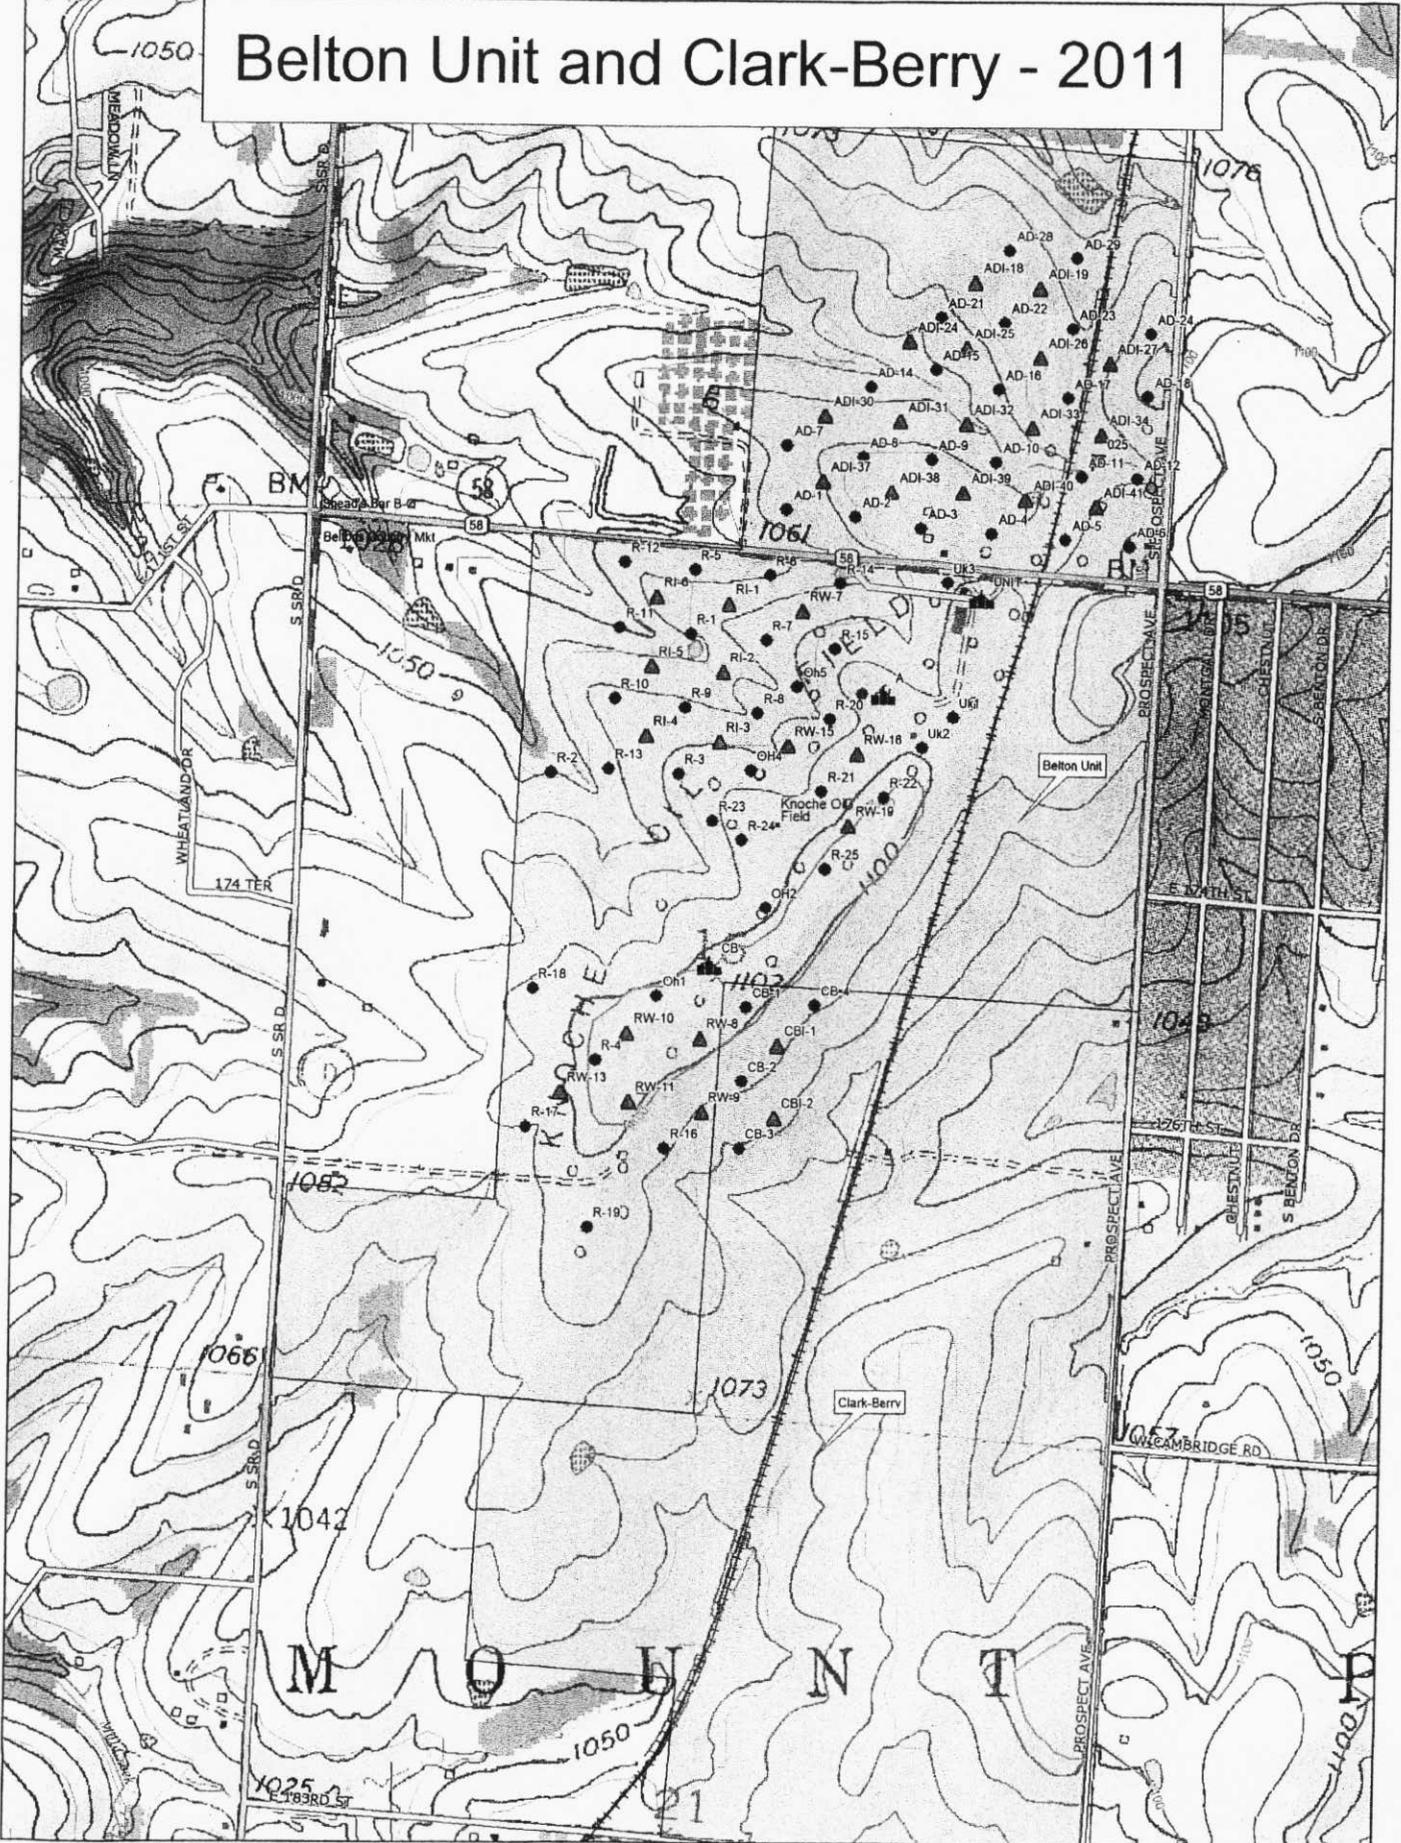


Data use subject to license.

© DeLorme. Topo North America™ 9.


www.delorme.com



Scale 1 : 14,400



1" = 1,200.0 ft Data Zoom 14-0

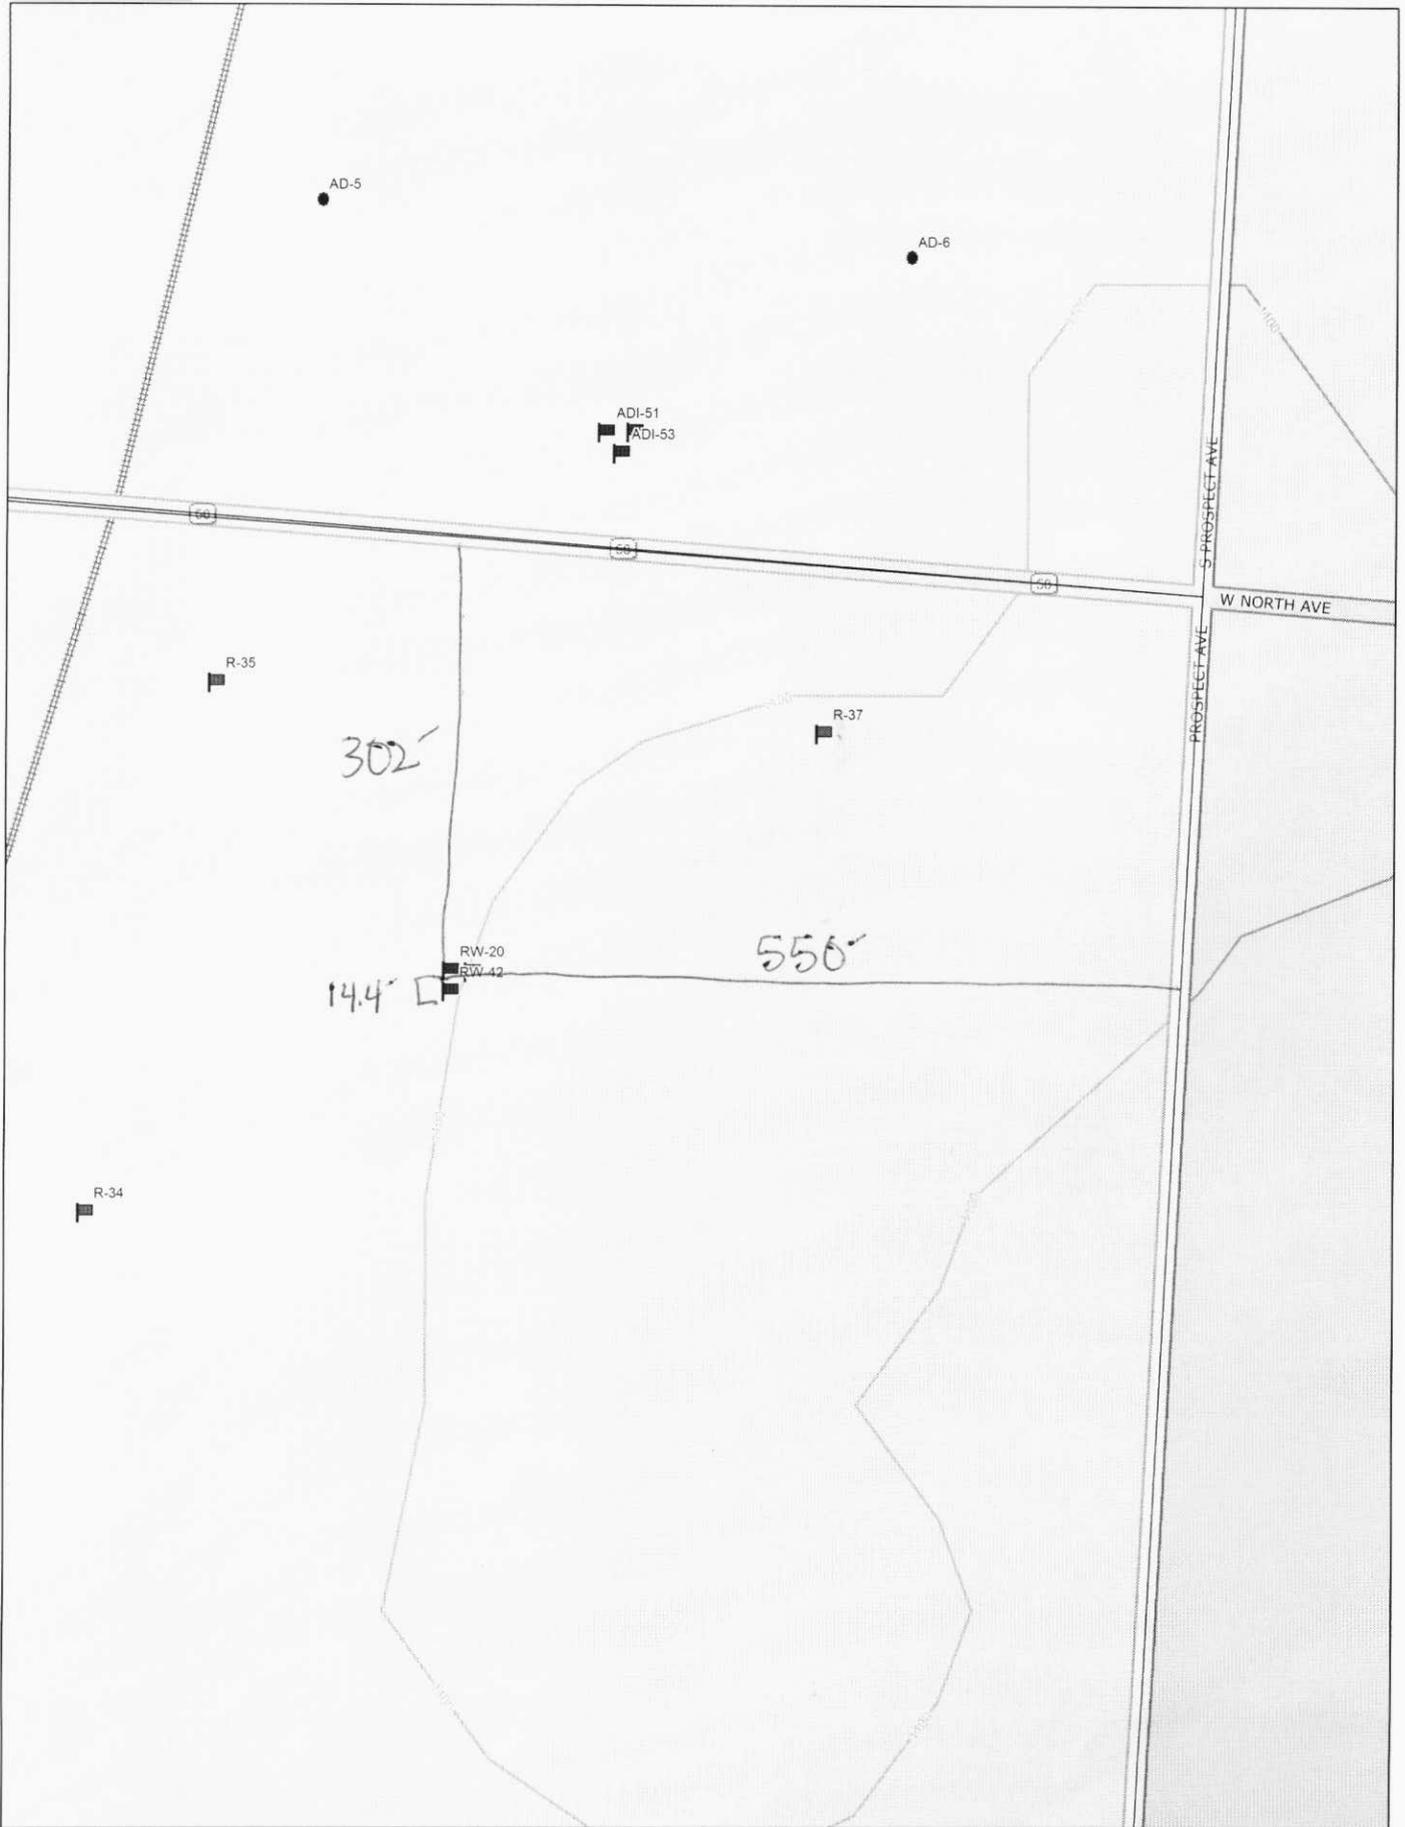

Data use subject to license.

© DeLorme. XMap® 7.

www.delorme.com



Scale 1 : 1,600



1" = 133.3 ft Data Zoom 17-0

Legal Description Report

Report Date: 03/07/2012
Selected By: Half Mile Radius
Selection: 38 48 56 94 34 7

Depth: Total depth of the well
Case: Casing depth
Yield: Amount of water the well can produce (gallons per minute)
SWL: Static water level; constant level of water in the well

Ref Num	Well Type	Site Address	Business	Last Name	Owner Address	Usage	Depth	SQ	MQ	LQ	Sec	Twn	Rng	Dir	Elev	Case	Yield	SWL
00399960	HEAT PUMP	17206 S. BENTON DR	RICHARD MATHER BUILDER, INC		13911 NORBY	MO VERTICAL	180.0				NW 15	46	33	W				

BELTON

GRANDVIEW

FEB 22 2012

AREA OF REVIEW WELLS (1/2 MILE RADIUS AROUND WELL) THAT PENETRATE THE INJECTION INTERVAL

INSTRUCTIONS

In the grid below, place the descriptions of area of review wells (1/2 mile radius around well) of public record that penetrate the proposed injection zone. Complete the following: lease name, well number, location, owner, depth in feet, type of well (Oil = O, Gas = G, Water = W, Injection = I, Strat Test = S, Unknown = U, Other - specify), date spudded, date completed, and construction of the well. Give a brief but accurate description of the well's construction including all plugging and/or completion of information, detailing the cement, casing, and subsurface casing information.

LEASE	WELL NO.	LOCATION	OWNER	DEPTH	TYPE	DATE SPURRED	DATE COMPLETED	CONSTRUCTION
Belton Unit	R-1	569 FROM (N) (S) SEC LINE 2412 FROM (E) (W) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	619'	O	04/08/1999	04/13/1999	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	R-2	1489 FROM (N) (S) SEC LINE 1024 FROM (E) (W) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	600'	O	06/04/1999	06/10/1999	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	R-3	1434 FROM (N) (S) SEC LINE 2423 FROM (E) (W) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	665'	O	02/29/2000	03/02/2000	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	R-4	5232 FROM (N) (S) SEC LINE 2073 FROM (E) (W) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	680'	O	03/02/2000	03/07/2000	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	R-5	168 FROM (N) (S) SEC LINE 2406 FROM (E) (W) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	639'	O	04/23/2000	04/25/2000	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	R-6	171 FROM (N) (S) SEC LINE 2890 FROM (E) (W) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	608'	O	04/27/2000	04/28/2000	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	R-7	571 FROM (N) (S) SEC LINE 2901 FROM (E) (W) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	646'	O	05/01/2000	05/02/2000	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	R-8	1023 FROM (N) (S) SEC LINE 8894 FROM (E) (W) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	655'	O	05/05/2000	05/08/2000	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	R-9	1008 FROM (N) (S) SEC LINE 2418 FROM (E) (W) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	651'	O	05/03/2000	05/05/2000	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump

AREA OF REVIEW/WELLS (1/2 MILE RADIUS AROUND WELL) THAT PENETRATE THE INJECTION INTERVAL

INSTRUCTIONS

In the grid below, place the descriptions of area of review wells (1/2 mile radius around well) of public record that penetrate the proposed injection zone. Complete the following: lease name, well number, location, owner, depth in feet, type of well (Oil = O, Gas = G, Water = W, Injection = I, Strat Test = S, Unknown = U, Other - specify), date spudded, date completed, and construction of the well. Give a brief but accurate description of the well's construction including all plugging and/or completion of information, detailing the cement, casing, and subsurface casing information.

LEASE	WELL NO.	LOCATION	OWNER	DEPTH	TYPE	DATE SPUDED	DATE COMPLETED	CONSTRUCTION
Belton Unit	R-10	1005 FROM (N) SEC LINE 1980 FROM (E) SEC LINE	K.R.E.D.	627'	O	05/15/2000	05/16/2000	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	R-11	567 FROM (N) SEC LINE 106 FROM (E) SEC LINE	K.R.E.D.	626'	O	05/10/2000	05/12/2000	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	R-12	1092 FROM (N) SEC LINE 1057 FROM (E) SEC LINE	K.R.E.D.	642'	O	05/16/2000	05/18/2000	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	R-13	1449 FROM (N) SEC LINE 1083 FROM (E) SEC LINE	K.R.E.D.	620'	O	05/22/2000	05/24/2000	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	R-14	174 FROM (S) SEC LINE 3335 FROM (E) SEC LINE	K.R.E.D.	637'	O	09/17/2001	09/19/2001	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	R-15	573 FROM (S) SEC LINE 3335 FROM (E) SEC LINE	K.R.E.D.	621'	O	12/15/2000	12/20/2000	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	R-16	3130 FROM (S) SEC LINE 2548 FROM (E) SEC LINE	K.R.E.D.	652.5'	O	10/13/2003	10/15/2003	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	R-17	9040 FROM (S) SEC LINE 1071 FROM (E) SEC LINE	K.R.E.D.	686'	O	01/29/2004	01/30/2004	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	R-18	3810 FROM (S) SEC LINE 1033 FROM (E) SEC LINE	K.R.E.D.	914.5'	O	01/07/2004	01/09/2004	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump

AREA OF REVIEW/WELLS (1/2 MILE RADIUS AROUND WELL) THAT PENETRATE THE INJECTION INTERVAL

INSTRUCTIONS

In the grid below, place the descriptions of area of review wells (1/2 mile radius around well) of public record that penetrate the proposed injection zone. Complete the following: lease name, well number, location, owner, depth in feet, type of well (Oil = O, Gas = G, Water = W, Injection = I, Strat Test = S, Unknown = U, Other - specify), date spudded, date completed, and construction of the well. Give a brief but accurate description of the well's construction including all plugging and/or completion of information, detailing the cement, casing, and subsurface casing information.

LEASE	WELL NO.	LOCATION	OWNER	DEPTH	TYPE	DATE SPURRED	DATE COMPLETED	CONSTRUCTION
Belton Unit	R-19	1132 FROM (N) SEC LINE 2010 FROM (E) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	621.5'	O	02/12/2004	02/13/2004	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	R-20	1080 FROM (N) SEC LINE 2045 FROM (E) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	661'	O	01/18/2008	01/22/2008	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	R-21	2100 FROM (N) SEC LINE 2015 FROM (E) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	635'	O	01/14/2008	01/16/2008	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	R-22	1100 FROM (N) SEC LINE 1605 FROM (E) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	660'	O	12/04/2008	N/A	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	R-23	3320 FROM (N) SEC LINE 2425 FROM (E) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	660'	O	U	N/A	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	R-24	3320 FROM (N) SEC LINE 2495 FROM (E) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	658'	O	01/25/2008	N/A	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	R-25	3320 FROM (N) SEC LINE 2045 FROM (E) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	660'	O	U	N/A	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	R-1	368 FROM (N) SEC LINE 2051 FROM (E) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	623'	I	07/26/2000	08/31/2000	4 1/2" casing cemented to surface
Belton Unit	R-2	795 FROM (N) SEC LINE 2053 FROM (E) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	627'	I	U	U	4 1/2" casing cemented to surface

AREA OF REVIEW WELLS (1/2 MILE RADIUS AROUND WELL) THAT PENETRATE THE INJECTION INTERVAL

INSTRUCTIONS

In the grid below, place the descriptions of area of review wells (1/2 mile radius around well) of public record that penetrate the proposed injection zone. Complete the following: lease name, well number, location, owner, depth in feet, type of well (Oil = O, Gas = G, Water = W, Injection = I, Strat Test = S, Unknown = U, Other - specify), date spudded, date completed, and construction of the well. Give a brief but accurate description of the well's construction including all plugging and/or completion of information, detailing the cement, casing, and subsurface casing information.

LEASE	WELL NO.	LOCATION	OWNER	DEPTH	TYPE	DATE SPULDED	DATE COMPLETED	CONSTRUCTION
Belton Unit	RI-3	1214 FROM (N/S) SEC LINE 2167 FROM (E/W) SEC LINE	K.R.E.D.	635'	I	U	U	4 1/2" casing cemented to surface
Belton Unit	RI-4	SEC. 16 T. 46 N.R. 33W 1277 FROM (N/S) SEC LINE 2207 FROM (E/W) SEC LINE	K.R.E.D.	641'	I	08/25/2000	08/29/2000	4 1/2" casing cemented to surface
Belton Unit	RI-5	SEC. 16 T. 46 N.R. 33W 790 FROM (N/S) SEC LINE 2194 FROM (E/W) SEC LINE	K.R.E.D.	637'	I	U	U	4 1/2" casing cemented to surface
Belton Unit	RI-6	SEC. 16 T. 46 N.R. 33W 367 FROM (N/S) SEC LINE 2187 FROM (E/W) SEC LINE	K.R.E.D.	644'	I	U	U	4 1/2" casing cemented to surface
Belton Unit	WSW-1	SEC. 16 T. 46 N.R. 33W 843 FROM (N/S) SEC LINE 3529 FROM (E/W) SEC LINE	K.R.E.D.	891'	W	04/16/2001	04/14/2001	
Belton Unit	C-18	SEC. 16 T. 46 N.R. 33W 110 FROM (N/S) SEC LINE 424 FROM (E/W) SEC LINE	K.R.E.D.	571'	Plugged	U	U	Squeezed
Belton Unit	RW-7	SEC. 16 T. 46 N.R. 33W 374 FROM (N/S) SEC LINE 3115 FROM (E/W) SEC LINE	K.R.E.D.	638'	I	02/10/2004	02/11/2004	4 1/2" casing cemented to surface
Belton Unit	RW-8	SEC. 16 T. 46 N.R. 33W 3048 FROM (N/S) SEC LINE 2714 FROM (E/W) SEC LINE	K.R.E.D.	641.5'	I	02/12/2004	02/13/2004	4 1/2" casing cemented to surface
Belton Unit	RW-9	SEC. 16 T. 46 N.R. 33W 3505 FROM (N/S) SEC LINE 2770 FROM (E/W) SEC LINE	K.R.E.D.	647.5'	I	01/13/2004	01/15/2004	4 1/2" casing cemented to surface

AREA OF REVIEW WELLS (1/2 MILE RADIUS AROUND WELL) THAT PENETRATE THE INJECTION INTERVAL

INSTRUCTIONS

In the grid below, place the descriptions of area of review wells (1/2 mile radius around well) of public record that penetrate the proposed injection zone. Complete the following: lease name, well number, location, owner, depth in feet, type of well (Oil = O, Gas = G, Water = W, Injection = I, Strat Test = S, Unknown = U, Other - specify), date spudded, date completed, and construction of the well. Give a brief but accurate description of the well's construction including all plugging and/or completion of information, detailing the cement, casing, and subsurface casing information.

LEASE	WELL NO.	LOCATION	OWNER	DEPTH	TYPE	DATE SPUDED	DATE COMPLETED	CONSTRUCTION
Belton Unit	RW-10	405' FROM (N/S) SEC LINE 2025' FROM (E/W) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	678'	I	02/02/2004	02/03/2004	4 1/2" casing cemented to surface
Belton Unit	RW-11	311' FROM (N/S) SEC LINE 8263' FROM (E/W) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	652'	I	02/04/2004	02/06/2004	4 1/2" casing cemented to surface
Belton Unit	RW-13	3055' FROM (N/S) SEC LINE 1812' FROM (E/W) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	697'	I	02/06/2004	02/09/2004	4 1/2" casing cemented to surface
Belton Unit	RW-15	2780' FROM (N/S) SEC LINE 2205' FROM (E/W) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	660'	I	11/26/2008	N/A	4 1/2" casing cemented to surface
Belton Unit	RW-16	3190' FROM (N/S) SEC LINE 1825' FROM (E/W) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	660'	I	12/02/2008	N/A	4 1/2" casing cemented to surface
Belton Unit	RW-19	3510' FROM (N/S) SEC LINE 1825' FROM (E/W) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	661'	I	12/08/2008	N/A	4 1/2" casing cemented to surface
Belton Unit	AD-1	220' FROM (N/S) SEC LINE 2420' FROM (E/W) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	615'	O	12/03/2007	01/04/2008	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	AD-2	220' FROM (N/S) SEC LINE 2000' FROM (E/W) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	657'	O	12/06/2007	12/10/2007	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	AD-3	212' FROM (N/S) SEC LINE 3800' FROM (E/W) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	637'	O	08/31/1987	U	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump

AREA OF REVIEW WELLS (1/2 MILE RADIUS AROUND WELL) THAT PENETRATE THE INJECTION INTERVAL

INSTRUCTIONS

In the grid below, place the descriptions of area of review wells (1/2 mile radius around well) of public record that penetrate the proposed injection zone. Complete the following: lease name, well number, location, owner, depth in feet, type of well (Oil = O, Gas = G, Water = W, Injection = I, Strat Test = S, Unknown = U, Other - specify), date spudded, date completed, and construction of the well. Give a brief but accurate description of the well's construction including all plugging and/or completion of information, detailing the cement, casing, and subsurface casing information.

LEASE	WELL NO.	LOCATION	OWNER	DEPTH	TYPE	DATE SPULDED	DATE COMPLETED	CONSTRUCTION
Belton Unit	AD-4	220 FROM (N) (S) SEC LINE FROM (E) (W) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	666'	O	07/14/1987	07/16/1987	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	AD-5	220 FROM (N) (S) SEC LINE FROM (E) (W) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	679'	O	06/21/1987	06/25/1987	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	AD-6	204 FROM (N) (S) SEC LINE FROM (E) (W) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	708'	O	01/31/2008	02/19/2008	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	AD-7	654 FROM (N) (S) SEC LINE FROM (E) (W) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	630'	O	12/12/2007	12/14/2007	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	AD-8	630 FROM (N) (S) SEC LINE FROM (E) (W) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	622'	O	05/14/1999	05/27/1999	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	AD-9	644 FROM (N) (S) SEC LINE FROM (E) (W) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	662'	O	08/25/1987	U-1987	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	AD-10	662 FROM (N) (S) SEC LINE FROM (E) (W) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	659'	O	05/25/1987	07/21/1987	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	AD-11	621 FROM (N) (S) SEC LINE FROM (E) (W) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	665'	O	U-1987	U-1987	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	AD-12	310 FROM (N) (S) SEC LINE FROM (E) (W) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	710'	O	01/23/2008	02/26/2008	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump

AREA OF REVIEW WELLS (1/2 MILE RADIUS AROUND WELL) THAT PENETRATE THE INJECTION INTERVAL

INSTRUCTIONS

In the grid below, place the descriptions of area of review wells (1/2 mile radius around well) of public record that penetrate the proposed injection zone. Complete the following: lease name, well number, location, owner, depth in feet, type of well (Oil = O, Gas = G, Water = W, Injection = I, Strat Test = S, Unknown = U, Other - specify), date spudded, date completed, and construction of the well. Give a brief but accurate description of the well's construction including all plugging and/or completion of information, detailing the cement, casing, and subsurface casing information.

LEASE	WELL NO.	LOCATION	OWNER	DEPTH	TYPE	DATE SPULDED	DATE COMPLETED	CONSTRUCTION
Belton Unit	AD-13	1166 FROM (N) SEC LINE 2420 FROM (E) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	700'	Plugged	12/21/2007	N/A	Cemented from bottom to top on 12/27/2007
Belton Unit	AD-14	1861 FROM (N) SEC LINE 3105 FROM (E) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	609'	O	04/21/1999	05/13/1999	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	AD-15	210 FROM (N) SEC LINE 3801 FROM (E) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	617'	O	11/13/1989	11/14/1989	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	AD-16	1102 FROM (N) SEC LINE 1205 FROM (E) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	666'	O	07/23/1987	U-1987	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	AD-17	1165 FROM (N) SEC LINE 4653 FROM (E) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	647'	O	U	U	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	AD-18	1100 FROM (N) SEC LINE 300 FROM (E) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	676.5'	O	01/02/2008	02/26/2008	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	AD-21	153 FROM (N) SEC LINE 3801 FROM (E) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	656'	O	09/11/2003	09/12/2003	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	AD-22	1534 FROM (N) SEC LINE 4212 FROM (E) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	650'	O	06/13/1999	06/18/1999	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	AD-23	1541 FROM (N) SEC LINE 4044 FROM (E) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	644'	O	09/09/2003	09/11/2003	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump

AREA OF REVIEW WELLS (1/2 MILE RADIUS AROUND WELL) THAT PENETRATE THE INJECTION INTERVAL

INSTRUCTIONS

In the grid below, place the descriptions of area of review wells (1/2 mile radius around well) of public record that penetrate the proposed injection zone. Complete the following: lease name, well number, location, owner, depth in feet, type of well (Oil = O, Gas = G, Water = W, Injection = I, Strat Test = S, Unknown = U, Other - specify), date spudded, date completed, and construction of the well. Give a brief but accurate description of the well's construction including all plugging and/or completion of information, detailing the cement, casing, and subsurface casing information.

LEASE	WELL NO.	LOCATION	OWNER	DEPTH	TYPE	DATE SPULDED	DATE COMPLETED	CONSTRUCTION
Belton Unit	AD-24	SDP FROM (N) (S) SEC LINE 300 FROM (E) (W) SEC LINE	K.R.E.D.	672.5	O	12/27/2007	02/06/2008	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	AD-28	WT1 FROM (N) (S) SEC LINE WT4 FROM (E) (W) SEC LINE	K.R.E.D.	629'	O	07/08/1999	07/14/1999	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	AD-29	WT1 FROM (N) (S) SEC LINE WT2 FROM (E) (W) SEC LINE	K.R.E.D.	625'	O	06/18/1999	07/07/1999	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	AD-18	WT1 FROM (N) (S) SEC LINE WT3 FROM (E) (W) SEC LINE	K.R.E.D.	651.5'	I	10/09/2003	10/10/2003	4 1/2" casing cemented to surface
Belton Unit	AD-19	WT1 FROM (N) (S) SEC LINE WT1 FROM (E) (W) SEC LINE	K.R.E.D.	654.5'	I	10/07/2003	10/08/2003	4 1/2" casing cemented to surface
Belton Unit	AD-24	WT1 FROM (N) (S) SEC LINE WT1 FROM (E) (W) SEC LINE	K.R.E.D.	662'	I	09/16/2003	09/17/2003	4 1/2" casing cemented to surface
Belton Unit	AD-25	WT1 FROM (N) (S) SEC LINE WT1 FROM (E) (W) SEC LINE	K.R.E.D.	651.5'	I	09/12/2003	09/15/2003	4 1/2" casing cemented to surface
Belton Unit	AD-26	WT1 FROM (N) (S) SEC LINE WT1 FROM (E) (W) SEC LINE	K.R.E.D.	650.5'	I	09/17/2003	09/19/2003	4 1/2" casing cemented to surface
Belton Unit	AD-27	WT1 FROM (N) (S) SEC LINE WT1 FROM (E) (W) SEC LINE	K.R.E.D.	674.1'	I	01/04/2008	04/16/2008	4 1/2" casing cemented to surface

AREA OF REVIEW WELLS (1/2 MILE RADIUS AROUND WELL) THAT PENETRATE THE INJECTION INTERVAL

INSTRUCTIONS

In the grid below, place the descriptions of area of review wells (1/2 mile radius around well) of public record that penetrate the proposed injection zone. Complete the following: lease name, well number, location, owner, depth in feet, type of well (Oil = O, Gas = G, Water = W, Injection = I, Strat Test = S, Unknown = U, Other - specify), date spudded, date completed, and construction of the well. Give a brief but accurate description of the well's construction including all plugging and/or completion of information, detailing the cement, casing, and subsurface casing information.

LEASE	WELL NO.	LOCATION	OWNER	DEPTH	TYPE	DATE SPULDED	DATE COMPLETED	CONSTRUCTION
Belton Unit	ADI-30	850 FROM (N) (S) SEC LINE 2006 FROM (E) (W) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	627.7'	I	12/19/2007	04/16/2008	4 1/2" casing cemented to surface
Belton Unit	ADI-31	860 FROM (N) (S) SEC LINE 2013 FROM (E) (W) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	633'	I	05/27/1999	06/04/1999	4 1/2" casing cemented to surface
Belton Unit	ADI-32	871 FROM (N) (S) SEC LINE 1034 FROM (E) (W) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	649'	I	U	U	4 1/2" casing cemented to surface
Belton Unit	ADI-33	881 FROM (N) (S) SEC LINE 1454 FROM (E) (W) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	642'	I	U	U	4 1/2" casing cemented to surface
Belton Unit	ADI-34	879 FROM (N) (S) SEC LINE 1891 FROM (E) (W) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	663'	I	U	U	4 1/2" casing cemented to surface
Belton Unit	ADI-37	440 FROM (N) (S) SEC LINE 2200 FROM (E) (W) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	618.2'	I	12/13/2007	04/16/2008	4 1/2" casing cemented to surface
Belton Unit	ADI-38	441 FROM (N) (S) SEC LINE 1700 FROM (E) (W) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	668.9'	I	12/17/2007	04/16/2008	4 1/2" casing cemented to surface
Belton Unit	ADI-39	441 FROM (N) (S) SEC LINE 1405 FROM (E) (W) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	631'	I	U	U	4 1/2" casing cemented to surface
Belton Unit	ADI-40	441 FROM (N) (S) SEC LINE 1412 FROM (E) (W) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	664'	I	U	U	4 1/2" casing cemented to surface

AREA OF REVIEW WELLS (1/2 MILE RADIUS AROUND WELL) THAT PENETRATE THE INJECTION INTERVAL

INSTRUCTIONS

In the grid below, place the descriptions of area of review wells (1/2 mile radius around well) of public record that penetrate the proposed injection zone. Complete the following: lease name, well number, location, owner, depth in feet, type of well (Oil = O, Gas = G, Water = W, Injection = I, Strat Test = S, Unknown = U, Other - specify), date spudded, date completed, and construction of the well. Give a brief but accurate description of the well's construction including all plugging and/or completion of information, detailing the cement, casing, and subsurface casing information.

LEASE	WELL NO.	LOCATION	OWNER	DEPTH	TYPE	DATE SPURRED	DATE COMPLETED	CONSTRUCTION
Belton Unit	ADI-41	442 FROM (N) (S) SEC LINE 1409 FROM (E) (W) SEC LINE SEC. 9 T. 46 N.R. 33W	K.R.E.D.	600' est	I	✓	✓	4 1/2" casing cemented to surface
Belton Unit	OH-1	2915 FROM (N) (S) SEC LINE 2406 FROM (E) (W) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	600' est	O	✓	✓	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	OH-2	2201 FROM (N) (S) SEC LINE 3051 FROM (E) (W) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	600' est	O	✓	✓	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	OH-3	931 FROM (N) (S) SEC LINE 2408 FROM (E) (W) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	600' est	O	✓	✓	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	OH-4	1340 FROM (N) (S) SEC LINE 2518 FROM (E) (W) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	600' est	O	✓	✓	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	OH-5	833 FROM (N) (S) SEC LINE 2121 FROM (E) (W) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	600' est	O	✓	✓	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	OH-6	919 FROM (N) (S) SEC LINE 5416 FROM (E) (W) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	600' est	Plugged	✓	✓	Squeezed cement into formation to surface
Belton Unit	OH-7	753 FROM (N) (S) SEC LINE 2100 FROM (E) (W) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	600' est	Plugged	✓	✓	Squeezed cement into formation to surface
Belton Unit	OH-8	138 FROM (N) (S) SEC LINE 2921 FROM (E) (W) SEC LINE SEC. 16 T. 46 N.R. 33W	K.R.E.D.	600' est	Plugged	✓	✓	Squeezed cement into formation to surface

AREA OF REVIEW WELLS (1/2 MILE RADIUS AROUND WELL) THAT PENETRATE THE INJECTION INTERVAL

INSTRUCTIONS

In the grid below, place the descriptions of area of review wells (1/2 mile radius around well) of public record that penetrate the proposed injection zone. Complete the following: lease name, well number, location, owner, depth in feet, type of well (Oil = O, Gas = G, Water = W, Injection = I, Strat Test = S, Unknown = U, Other - specify), date spudded, date completed, and construction of the well. Give a brief but accurate description of the well's construction including all plugging and/or completion of information, detailing the cement, casing, and subsurface casing information.

LEASE	WELL NO.	LOCATION	OWNER	DEPTH	TYPE	DATE SPULDED	DATE COMPLETED	CONSTRUCTION
Belton Unit	OH-9	604 FROM (N/S) SEC LINE 523 FROM (E/W) SEC LINE	K.R.E.D.	600' est	Plugged	✓	✓	Squeezed cement into formation to surface
Belton Unit	UK-1	SEC. 16 T. 46 N.R. 33W 4530 FROM (N/S) SEC LINE 1700 FROM (E/W) SEC LINE	K.R.E.D.	U	O	✓	✓	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	UK-2	SEC. 16 T. 46 N.R. 33W 1710 FROM (N/S) SEC LINE 1710 FROM (E/W) SEC LINE	K.R.E.D.	U	O	✓	✓	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Belton Unit	UK-3	SEC. 16 T. 46 N.R. 33W 5908 FROM (N/S) SEC LINE 1310 FROM (E/W) SEC LINE	K.R.E.D.	U	O	✓	✓	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Clark-Berry	CB-1	SEC. 16 T. 46 N.R. 33W 2020 FROM (N/S) SEC LINE 2010 FROM (E/W) SEC LINE	K.R.E.D.	625'	O	03/22/1999	✓	2 7/8" with 1" tubing and insert pump
Clark-Berry	CB-2	SEC. 16 T. 46 N.R. 33W 2000 FROM (N/S) SEC LINE 2000 FROM (E/W) SEC LINE	K.R.E.D.	625'	O	✓	✓	2 7/8" with 1" tubing and insert pump
Clark-Berry	CB-3	SEC. 16 T. 46 N.R. 33W 2410 FROM (N/S) SEC LINE 2020 FROM (E/W) SEC LINE	K.R.E.D.	625'	O	03/25/1999	03/30/1999	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Clark-Berry	CB-4	SEC. 16 T. 46 N.R. 33W 2010 FROM (N/S) SEC LINE 2010 FROM (E/W) SEC LINE	K.R.E.D.	619'	O	03/30/1999	04/02/1999	4 1/2" casing cemented to surface 2 3/8" tubing 3/4" rods and insert pump
Clark-Berry	CB1-1	SEC. 16 T. 46 N.R. 33W 5050 FROM (N/S) SEC LINE 5011 FROM (E/W) SEC LINE	K.R.E.D.	629'	I	03/22/1999	03/25/1999	4 1/2" casing cemented to surface

RECEIVED

APR 27 2012

Mo Oil & Gas Council

AFFIDAVIT OF PUBLICATION

(Space above for recording information)

STATE OF MISSOURI
COUNTY OF CASS ss.

I, Janis Anslinger, being duly sworn according to law, state that I am the Classified Ad Manager of the Cass County Democrat-Missourian, a weekly newspaper of general circulation in the County of Cass, State of Missouri, where located; which newspaper has been admitted to the Post Office as periodical class matter in the City of Harrisonville, Missouri, the city of publication; which newspaper has been published regularly and consecutively for a period of three years and has a list of bonafide subscribers, voluntarily engaged as such who have paid or agreed to pay a stated price for a subscription for a definite period of time, and that such newspaper has complied with the provisions of Section 493.050, Revised Statutes of Missouri 2000, and Section 59.310, Revised Statutes of Missouri 2000. The affixed notice appeared in said newspaper in the following consecutive issues:

- 1st Insertion: Vol. B2 No. 26, 13 day of Apr 20 12.
2nd Insertion: Vol. No. day of 20
3rd Insertion: Vol. No. day of 20
4th Insertion: Vol. No. day of 20
5th Insertion: Vol. No. day of 20

Janis Anslinger, Classified Ad Manager

Subscribed and sworn to before me on this 19 day of April 20 12

DEREK PIERCE
Notary Public - Notary Seal
STATE OF MISSOURI
Bates County
My Commission Expires: Jan. 21, 2013
Commission # 09734596

NOTICE

Kansas Resource Exploration & Development, LLC, 9393 W 110th St., Ste. 500, Overland Park, KS, 66210, has applied for 33 injection well permits to be drilled to an approximate depth of 650 feet. Water will be injected into the Squirrel Sandstone formation for an Enhanced Oil Recovery Project at the following locations.

- #RW-20 5,152' from line/550' from line, Section 16, Township 46N, Range 33W
#RW-21 5,160' from line/989' from line, Section 16, Township 46N, Range 33W
#RW-22 4,765' from line/1,087' from E line, Section 16, Township 46N, Range 33W
#RW-23 5,122' from line/1,433' from E line, Section 16, Township 46N, Range 33W
#RW-24 4,722' from line/1,441' from E line, Section 16, Township 46N, Range 33W
#RW-25 5,119' from line/1,879' from E line, Section 16, Township 46N, Range 33W
#RW-26 4,698' from line/1,885' from E line, Section 16, Township 46N, Range 33W
#RW-27 4,698' from line/2,304' from E line, Section 16, Township 46N, Range 33W
#RW-28 5,105' from line/3,637' from E line, Section 16, Township 46N, Range 33W
#RW-29 4,675' from line/3,637' from E line, Section 16, Township 46N, Range 33W
#RW-30 4,216' from line/3,637' from E line, Section 16, Township 46N, Range 33W
#RW-31 4,664' from line/3,624' from E line, Section 16, Township 46N, Range 33W
#RW-32 4,669' from line/3,635' from E line, Section 16, Township 46N, Range 33W
#RW-33 4,214' from line/3,634' from E line, Section 16, Township 46N, Range 33W
#RW-34 4,213' from line/3,640' from E line, Section 16, Township 46N, Range 33W
#RW-35 5,112' from line/3,638' from E line, Section 16, Township 46N, Range 33W
#RW-36 5,103' from line/3,638' from E line, Section 16, Township 46N, Range 33W
#RW-37 5,126' from line/3,208' from E line, Section 16, Township 46N, Range 33W
#RW-38 5,120' from line/3,219' from E line, Section 16, Township 46N, Range 33W
#RW-39 5,110' from line/2,770' from E line, Section 16, Township 46N, Range 33W
#RW-40 5,105' from line/2,765' from E line, Section 16, Township 46N, Range 33W
#ADI-42 382' from S line/446' from E line, Section 9, Township 46N, Range 33W
#ADI-43 11' from S line/409' from E line, Section 9, Township 46N, Range 33W
#ADI-44 409' from S line/447' from E line, Section 9, Township 46N, Range 33W
#ADI-45 433' from S line/892' from E line, Section 9, Township 46N, Range 33W
#ADI-46 392' from S line/936' from E line, Section 9, Township 46N, Range 33W
#ADI-47 397' from S line/891' from E line, Section 9, Township 46N, Range 33W
#ADI-48 408' from S line/1,332' from line, Section 9, Township 46N, Range 33W
#ADI-49 440' from S line/1,294' from line, Section 9, Township 46N, Range 33W
#ADI-50 411' from S line/1,290' from line, Section 9, Township 46N, Range 33W
#ADI-51 66' from S line/464' from line, Section 9, Township 46N, Range 33W
#ADI-52 67' from S line/445' from line, Section 9, Township 46N, Range 33W
#ADI-53 51' from S line/453' from line, Section 9, Township 46N, Range 33W

Written comments or requests for additional information regarding such wells should be directed within fifteen (15) days of this notice to the address below.

State Geologist
Missouri Oil & Gas Council
P.O. Box 250
Rolla, MO 65401